

Exam Winter Semester 2022

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

- Exam Winter Semester 2022** 2
- Additional permitted Aids 2
- Hits 2
- Tasks 2
- Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) 2
- Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) 2
- Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) 3
- Exercise E4 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) 5
- Exercise E5 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) 9
- Exercise E6 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) 10
- Exercise E7 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) 11
- Exercise E8 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) 12

Exam Winter Semester 2022

Additional permitted Aids

- non-programmable calculator,
- formulary (2 DIN A4 pages)

Hits

- The duration of the exam is 60 min.
- Attempts to cheat will lead to exclusion and failure of the exam.
- Withdrawal is no longer possible after these exam has been handed out.
- Please write down intermediate calculations and results on the assignment sheet. (when more space is needed also on the reverse side. In this case: Mark it clearly).
- Always use units in the calculation.
- Use a document-proof, non-red pen.

Tasks

Exercise E1 Resistance of a Wire by Resistivity

(written test, approx. 6 % of a 60-minute written test, WS2022)

2. Heating elements made of solid wire with a temperature coefficient of $1.80 \cdot 10^{-3} \text{ K}^{-1}$ are used. The electric power dissipation (= heat flow) of $P=40 \text{ W}$ is necessary.

Calculate the current I needed to operate it.

The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6} \text{ } \Omega \text{ m}$.

The heating element is 3 m long and has a diameter of 3.57 mm .

∴ Calculate the resistance R of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \\ I &= \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \text{with } A = r^2 \cdot \pi = \\ &= \frac{1}{4} d^2 \cdot \pi \quad R = \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \text{and } R = \\ &= 1.10 \cdot 10^{-6} \text{ } \Omega \text{ m} \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

Exercise E2 Temperature-dependent Resistance

(written test, approx. 6 % of a 60-minute written test, WS2022)

2. A resistor is specified with the factor $\alpha = 2.0 \cdot 10^{-3} \text{ K}^{-1}$ and a nominal resistance of $R_0 = 100 \text{ } \Omega$ at $T_0 = 20 \text{ } ^\circ\text{C}$. Calculate the resistance R at $T = 100 \text{ } ^\circ\text{C}$.

Resistance of system $R = 10 \text{ k}\Omega$ at 25°C .
 Its temperature coefficients are: $\alpha = 0.01 \text{ } \frac{1}{\text{K}}$ and $\beta = 71 \cdot 10^{-6} \text{ } \frac{1}{\text{K}^2}$

Result
 The temperature inside the refrigeration system can reach down to -40°C .

... Calculation of resistance of the filament at -40°C .

Resistance of the resistor R depends on the current and generated heat. Therefore, a solution is to heat up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

with $\Delta T = T_{\text{end}} - T_{\text{start}}$


$$R = 10 \text{ k}\Omega \cdot \left(1 + 0.01 \frac{1}{\text{K}} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \frac{1}{\text{K}^2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2\right)$$

Exercise E3 Pure Resistor Network Simplification
 (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall hold: $R_1 = 200 \text{ }\Omega$, $R_2 = 100 \text{ }\Omega$, $R_3 = 100 \text{ }\Omega$, $R_4 = 100 \text{ }\Omega$ and the voltage $U = 10 \text{ V}$.
Result $R_{\text{eq}} = 132.8 \text{ }\Omega$.

Solution
 $R_{\text{eq}} = 132.8 \text{ }\Omega$

Now a wye-delta transformation is necessary.

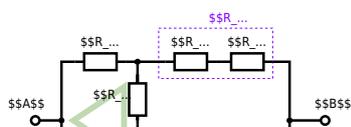


Since $R_2=R_3$ and based on the equations for the transformation, the transformed R_Y is given as:
$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:
$$R_{eq} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{eq} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B.

Solution

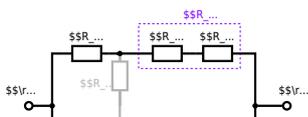


The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_{-1}) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega}$$

**Exercise E4 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result


$$U_{\text{s}} = U_{\text{AB}} = 4.5 \text{ V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$

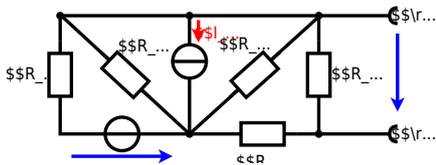


Calculated the internal resistance R_{int} and the source voltage U_{oc} of an equivalent linear voltage source on the connectors A and B . $R_1=5.0 \text{ } \Omega$, $U_2=6.0 \text{ V}$, $R_3= 10 \text{ } \Omega$, $I_4=4.2 \text{ A}$, $R_5=10 \text{ } \Omega$, $R_6=7.5 \text{ } \Omega$, $R_7=15 \text{ } \Omega$ Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

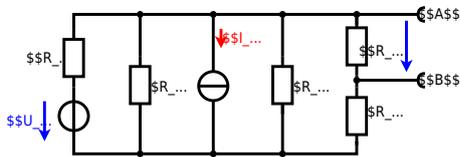

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

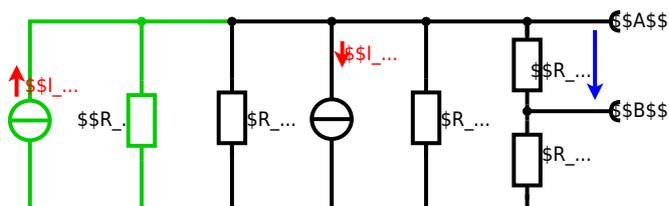

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :
$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$
 The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:
$$U_{24} = I_{24} \cdot (R_6 || R_7)$$

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} - (U_2 \over R_1 - I_4) \cdot \frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0 \Omega$, so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \Omega \cdot \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega}$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$


Exercise E5 Charging Capacitors
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit below is a RC circuit consisting of a DC voltage source U , a resistor R_1 , a resistor R_2 , and a capacitor C . The switch S_1 is initially open. The voltage across the capacitor is again 0 V at the moment $t_0 = 0 \text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.


Result: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

Solution: The ideal voltage source U_{eq} is given by $U_{eq} = U \cdot \frac{R_2}{R_1 + R_2}$ and the internal resistance $R_{eq} = R_1 || R_2$.

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .


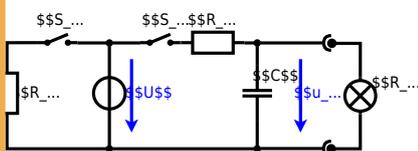


The circuit contains a voltage source $U=12\text{ V}$, a switch S_1 , a resistor of $R_1=20\text{ }\Omega$ and a capacitor of $C=100\text{ }\mu\text{F}$. The switch S_2 to an additional consumer R_2 will be considered to be open for the first task. At the moment $t_0=0\text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0)=0\text{ V}$.

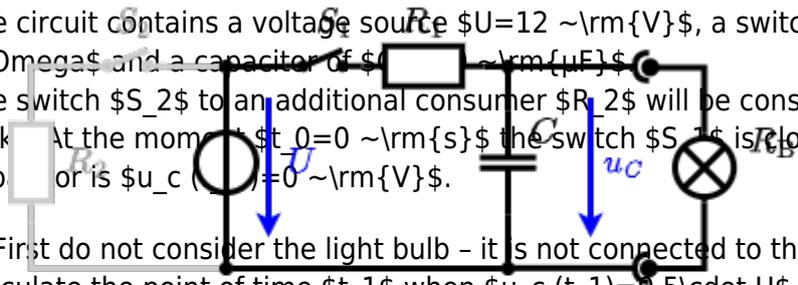

First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time t_1 when $u_c(t_1)=0.5 \cdot U$.

Solution

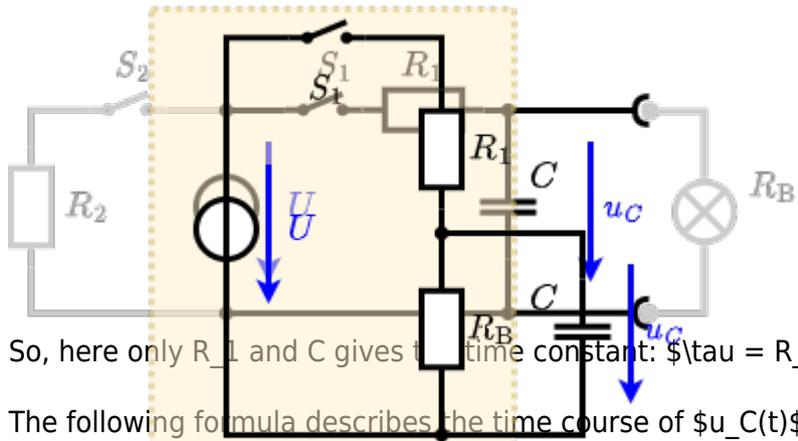

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_c(t)$ which has to be $u_c(t_1)=0.5 \cdot U$:

$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5$

$$e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = -\tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$$
 An equivalent linear voltage source can be given with U_s , R_1 and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = 1/2 \cdot U$ The internal resistance is given by substituting the ideal voltage source with its resistance ($=0\text{ }\Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10\text{ }\Omega$$

$$u_c(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1\text{ ms}/(10\text{ }\Omega \cdot 100\text{ }\mu\text{F})})$$

Exercise E6 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

1. Calculate the phasor voltage $\underline{u}_C(\omega)$ of the capacitor C through the components. (R and \underline{X}_1) shall be given.

After analysis, the following phasors can be extracted (logically) in phasor notation: $\underline{u}_C = (2) \cdot e^{j(\omega t + \varphi)} + 5 \cdot j \cdot \Omega$

Solution

1. Calculate the phasor voltage \underline{u}_C of the capacitor C .

```

\begin{align*} R_{\text{total}} &= \sqrt{R_1^2 + (X_L - X_C)^2} \\
&= \sqrt{1.00^2 + (4.7 - 10.0)^2} \\
&= \sqrt{1.00 + 76.09} \\
&= \sqrt{77.09} \\
&= 8.78 \text{ } \Omega
\end{align*}

```

The current I can be calculated as $I = \frac{U}{R_{\text{total}}} = \frac{50 \text{ V}}{8.78 \text{ } \Omega} = 5.70 \text{ A}$

The phase φ can be calculated as $\varphi = \arctan\left(\frac{X_L - X_C}{R}\right) = \arctan\left(\frac{4.7 - 10.0}{1.00}\right) = -1.11 \text{ rad}$

The absolute value of the total current is $I = 5.70 \text{ A}$

Exercise E7 Impedances at different Frequencies
(written test, approx. 18 % of a 60-minute written test, WS2022)

A series circuit with a resistor $R_1 = 1.00 \text{ } \Omega$, an inductor $L = 4.7 \text{ } \mu\text{H}$, and a capacitor $C = 10.0 \text{ nF}$ is connected to an AC voltage source $U = 50 \text{ V}$ at a frequency $f = 450 \text{ kHz}$. The current I through the resistor R_1 shall have the same absolute value of the impedance as a capacitor $C_3 = 40 \text{ nF}$ at $f = 4 \text{ MHz}$.

```

\begin{align*} R_1 &= 1.00 \text{ } \Omega \\
R_3 &= 10.0 \text{ } \Omega
\end{align*}

```

A series circuit means that the current is constant on every component.

The equivalent impedance for R and L combined is given by $Z_{RL} = \sqrt{R^2 + X_L^2}$

Parallel circuit means that the voltage is the same on R_3 and C_3 $U_{R_3} = U_{C_3} = U_{\text{parallel}}$


Since X_L and X_C are perpendicular to R , the resulting current of the parallel circuit is given as:

$$I_{\text{parallel}} = \sqrt{I_{R_3}^2 + I_{C_3}^2} = \sqrt{\left(\frac{U_{\text{parallel}}}{R_3}\right)^2 + \left(\frac{U_{\text{parallel}}}{X_{C_3}}\right)^2}$$

Therefore, the resulting current of the parallel circuit is given as:

$$I_{\text{parallel}} = \frac{U_{\text{parallel}}}{R_3} \sqrt{1 + \left(\frac{R_3}{X_{C_3}}\right)^2}$$

Back to the first formula: $I_{\text{parallel}} \cdot Z_{RL} = I_{\text{total}} \cdot R_1$

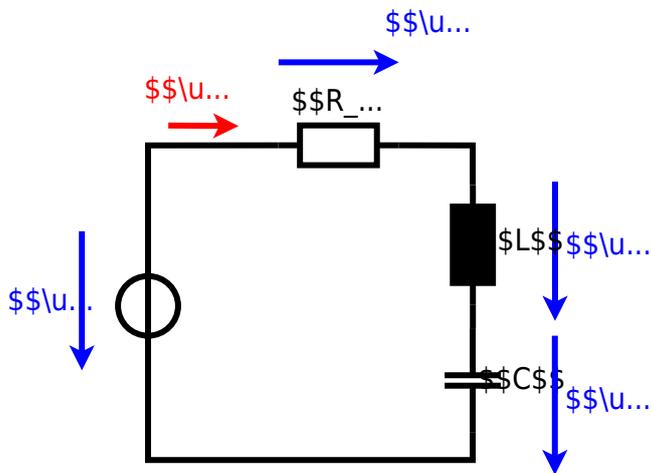

From:
<https://wiki.mexle.te.hs-heilbronn.de/> - **MEXLE Wiki**

Permanent link:
https://wiki.mexle.te.hs-heilbronn.de/electrical_engineering_and_electronics_1/ws2022_exam?rev=1768171359

Last update: **2026/01/11 23:42**

