

# ws2022\_exam\_r

## Student Group

| First Name | Surname | Matrikel Nr. |
|------------|---------|--------------|
|            |         |              |
|            |         |              |
|            |         |              |

## Table of Contents


|                                                                                                                         |    |
|-------------------------------------------------------------------------------------------------------------------------|----|
| Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) .....             | 2  |
| Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) .....      | 5  |
| Exercise E1 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) .....         | 6  |
| Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) .....            | 6  |
| Exercise E1 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) .....  | 9  |
| Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) .....   | 9  |
| Exercise E1 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) .....                  | 10 |
| Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) ..... | 11 |

## Exercise E1 Equivalent linear Source

(written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.  
Result


$$\begin{aligned} U_{\text{rs}} &= U_{\text{AB}} = 4.5 \text{ V} \\ R_{\text{ri}} &= R_{\text{AB}} = 6 \text{ } \Omega \end{aligned}$$

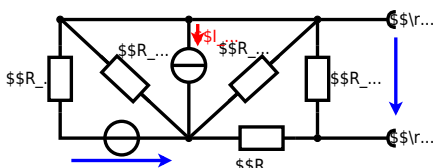


Calculated the internal resistance  $R_{\text{ri}}$  and the source voltage  $U_{\text{rs}}$  of an equivalent linear voltage source on the connectors  $\text{A}$  and  $\text{B}$ . 
$$\begin{aligned} R_1 &= 5.0 \text{ } \Omega, \quad U_2 = 6.0 \text{ V}, \quad R_3 = 10 \text{ } \Omega, \quad I_4 = 4.2 \text{ A}, \\ R_5 &= 10 \text{ } \Omega, \quad R_6 = 7.5 \text{ } \Omega, \quad R_7 = 15 \text{ } \Omega \end{aligned}$$
 Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

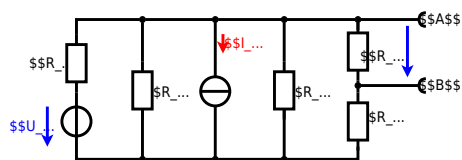

The linear voltage source of  $U_2$  and  $R_1$  can be transformed into a current source  $I_2 = \frac{U_2}{R_1}$  and  $R_1$ :

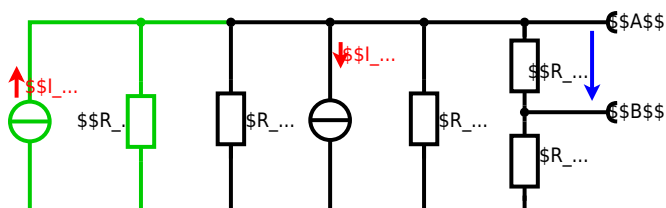

Now a lot of them can be combined. The resistors  $R_1$ ,  $R_3$ ,  $R_5$  are in parallel, like also  $I_2$  and  $I_4$ : 
$$R_{135} = R_1 || R_3 || R_5$$
 
$$I_{24} = I_2 - I_4 = \frac{U_2}{R_1} - I_4$$
 The resulting circuit can again be transformed:



Here, the  $U_{24}$  is calculated by  $I_{24}$  as the following: 
$$U_{24} = I_{24} \cdot R_{135}$$

$$U_{24} = R_{135} \cdot I_{24} \quad \&= \left( \frac{U_2}{R_1} - I_4 \right) \cdot R_1 \parallel R_3 \parallel R_5$$

On the right side of the last circuit, there is a voltage divider given by  $R_{135}$ ,  $R_6$ , and  $R_7$ .

Therefore the voltage between  $A$  and  $B$  is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} \quad \&= \left( \frac{U_2}{R_1} - I_4 \right) \cdot \frac{R_7 \cdot R_1 \parallel R_3 \parallel R_5}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5}$$

For the internal resistance  $R_i$  the ideal voltage source is substituted by its resistance ( $=0\Omega$ , so a short-circuit):

$$R_{AB} = R_7 \parallel (R_6 + R_1 \parallel R_3 \parallel R_5)$$

with  $R_1 \parallel R_3 \parallel R_5 = 5\Omega \parallel 10\Omega \parallel 10\Omega = 5\Omega \parallel 5\Omega = 2.5\Omega$ :

$$U_{AB} = \frac{6.0\text{V}}{5.0\Omega} - 4.2\Omega \cdot \frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega} \quad R_{AB} = 15\Omega \parallel (7.5\Omega + 2.5\Omega)$$

### Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. According to question 2, the effect of temperature on the resistance of the thermistor can be described by the equation:

Resistance of the thermistor  $R$  in  $\Omega$  as a function of the temperature  $T$  in  $^\circ\text{C}$  is given by:

Its temperature coefficients are:  $\alpha = 0.01 \text{ K}^{-1}$  and  $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$

Result

The temperature inside the refrigeration system can reach down to  $-40^\circ\text{C}$ .

$$R = 6.5 \text{ k}\Omega \quad \text{at } T = -40^\circ\text{C}$$

The power of the heater is  $P = \frac{U^2}{R}$ . The power of the heater decreases as the resistance increases. Therefore, a solution is to use a thermostat to control the power of the heater.

Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) \quad \& \quad R = 10 \text{ k}\Omega \cdot \left( 1 + 0.01 \cdot (-40 - 25) + 71 \cdot 10^{-6} \cdot (-40 - 25)^2 \right)$$

## Exercise E1 Analyzing complex Impedances

(written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the complex impedance  $\underline{Z}$  of the circuit shown in the figure. The components  $\underline{R}$  and  $\underline{X}_L$  shall be given.

After analysis, the full bidimensional complex impedance has been extracted and written in the following LaTeX code (to be used in the solution):

.. Calculation of the physical values of the two components.

Solution: 
$$\underline{R} = 0.12 \cdot 10^{-3} \Omega = 0.12 \text{ m}\Omega \quad \underline{X}_L = 2\pi \cdot 300 \cdot 0.12 \cdot 10^{-3} \text{ H} = 0.22 \text{ m}\Omega$$

Solution

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} \quad \underline{U} = 50 \text{ V} \quad \underline{Z} = \underline{R} + j\underline{X}_L = 0.12 \text{ m}\Omega + j0.22 \text{ m}\Omega$$
  
 The voltage  $\underline{U}$  is a complex number with a magnitude of 50 V and a phase of 0° (real).  
 The resulting impedance  $\underline{Z}$  is a complex number with a magnitude of 0.24 mΩ and a phase of 90°.  
 Therefore, the complex impedance  $\underline{Z}$  is  $\underline{Z} = 0.12 \text{ m}\Omega + j0.22 \text{ m}\Omega$ .  
 The magnitude of  $\underline{Z}$  is  $|\underline{Z}| = \sqrt{0.12^2 + 0.22^2} = 0.24 \text{ m}\Omega$ .  
 The phase of  $\underline{Z}$  is  $\varphi_Z = \arctan\left(\frac{0.22}{0.12}\right) = 61.1^\circ$ .  
 The complex impedance  $\underline{Z}$  can be written as  $\underline{Z} = 0.24 \text{ m}\Omega \cdot e^{j61.1^\circ}$ .  
 The current  $\underline{I}$  is  $\underline{I} = \frac{50 \text{ V}}{0.24 \text{ m}\Omega \cdot e^{j61.1^\circ}} = 208.3 \text{ A} \cdot e^{-j61.1^\circ}$ .  
 The magnitude of  $\underline{I}$  is  $|\underline{I}| = 208.3 \text{ A}$ .  
 The phase of  $\underline{I}$  is  $\varphi_I = -61.1^\circ$ .  
 The complex current  $\underline{I}$  can be written as  $\underline{I} = 208.3 \text{ A} \cdot e^{-j61.1^\circ}$ .  
 The voltage  $\underline{U}$  is  $\underline{U} = 50 \text{ V}$ .  
 The complex voltage  $\underline{U}$  can be written as  $\underline{U} = 50 \text{ V}$ .  
 The complex power  $\underline{S}$  is  $\underline{S} = \underline{U} \cdot \underline{I}^* = 50 \text{ V} \cdot 208.3 \text{ A} \cdot e^{j61.1^\circ} = 10415 \text{ VA} \cdot e^{j61.1^\circ}$ .  
 The magnitude of  $\underline{S}$  is  $|\underline{S}| = 10415 \text{ VA}$ .  
 The phase of  $\underline{S}$  is  $\varphi_S = 61.1^\circ$ .  
 The complex power  $\underline{S}$  can be written as  $\underline{S} = 10415 \text{ VA} \cdot e^{j61.1^\circ}$ .  
 The real power  $P$  is  $P = |\underline{S}| \cdot \cos(\varphi_S) = 10415 \text{ VA} \cdot \cos(61.1^\circ) = 4915 \text{ W}$ .  
 The reactive power  $Q$  is  $Q = |\underline{S}| \cdot \sin(\varphi_S) = 10415 \text{ VA} \cdot \sin(61.1^\circ) = 9115 \text{ var}$ .  
 The complex power  $\underline{S}$  can be written as  $\underline{S} = 4915 \text{ W} + j9115 \text{ var}$ .

## Exercise E1 Complex Impedance Circuit

(written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the complex impedance  $\underline{Z}$  of the circuit shown in the figure. The components  $\underline{R}$  and  $\underline{X}_L$  shall be given. The voltage source  $u(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t) \text{ V}$  is connected to a series circuit of an inductor of  $330 \text{ } \mu\text{H}$  and a capacitor of  $0.22 \text{ } \mu\text{F}$ .

Solution: 
$$\underline{Z} = \underline{R} + j\underline{X}_L - j\underline{X}_C = 0.12 \text{ m}\Omega + j0.22 \text{ m}\Omega - j0.22 \text{ m}\Omega = 0.12 \text{ m}\Omega$$

Result


.. Draw the circuit diagram of the given circuit. Label all components, voltages, and currents.

$$\underline{Z} = \frac{\underline{U}}{\underline{I}} \quad \underline{U} = 3.0 \text{ V} \quad \underline{I} = 208.3 \text{ A} \cdot e^{-j61.1^\circ}$$
  

$$\underline{Z} = \frac{3.0 \text{ V}}{208.3 \text{ A} \cdot e^{-j61.1^\circ}} = 0.0144 \text{ } \Omega \cdot e^{j61.1^\circ}$$

With the complex impedance  $\underline{Z}$  and the voltage source  $\underline{U}$ , the complex current  $\underline{I}$  can be calculated as  $\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{3.0 \text{ V}}{0.0144 \text{ } \Omega \cdot e^{j61.1^\circ}} = 208.3 \text{ A} \cdot e^{-j61.1^\circ}$ .  
 The magnitude of  $\underline{I}$  is  $|\underline{I}| = 208.3 \text{ A}$ .  
 The phase of  $\underline{I}$  is  $\varphi_I = -61.1^\circ$ .  
 The complex current  $\underline{I}$  can be written as  $\underline{I} = 208.3 \text{ A} \cdot e^{-j61.1^\circ}$ .



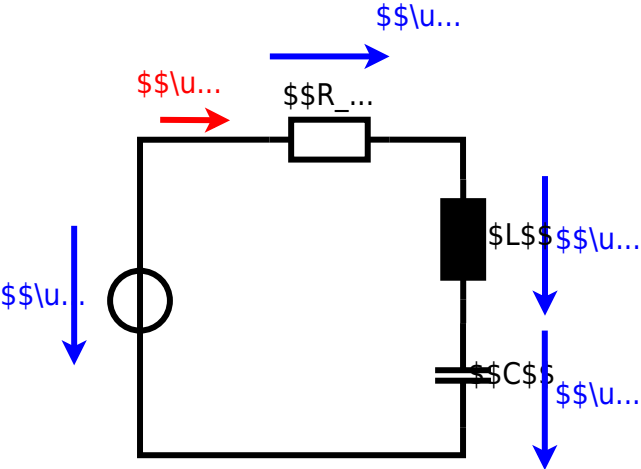

### Exercise E1 Impedances at different Frequencies

(written test, approx. 18 % of a 60-minute written test, WS2022)

2. A series circuit with two resistors  $R_1 = 1.00 \text{ k}\Omega$  and  $R_2 = 10.0 \text{ k}\Omega$  is connected to an AC voltage source  $U = 10 \text{ V}$  at a frequency  $f = 400 \text{ kHz}$ . A capacitor  $C = 40 \text{ nF}$  is connected in parallel with  $R_2$ . Calculate the total impedance  $Z$  of the circuit.

Solution

$$Z = \sqrt{R_1^2 + \left( \frac{R_2}{\sqrt{1 + (\omega C R_2)^2}} \right)^2}$$

$$Z = \sqrt{1.00^2 + \left( \frac{10.0}{\sqrt{1 + (2\pi \cdot 400 \cdot 10^3 \cdot 40 \cdot 10^{-9})^2}} \right)^2}$$

A series circuit means that the current is constant on every component.

The equivalent impedance for  $R_1$  and  $R_2$  combined is given by

$$Z_{\text{parallel}} = \frac{R_2}{\sqrt{1 + (\omega C R_2)^2}}$$

Therefore, the resulting current of the parallel circuit is given as:

$$I = \frac{U}{Z} = \frac{10 \text{ V}}{\sqrt{1.00^2 + \left( \frac{10.0}{\sqrt{1 + (2\pi \cdot 400 \cdot 10^3 \cdot 40 \cdot 10^{-9})^2}} \right)^2}}$$

Back to the first formula:

$$Z = \sqrt{R_1^2 + \left( \frac{R_2}{\sqrt{1 + (\omega C R_2)^2}} \right)^2} = \sqrt{1.00^2 + \left( \frac{10.0}{\sqrt{1 + (2\pi \cdot 400 \cdot 10^3 \cdot 40 \cdot 10^{-9})^2}} \right)^2}$$

### Exercise E1 Resistance of a Wire by Resistivity

(written test, approx. 6 % of a 60-minute written test, WS2022)

2. A heating element made of nichrome wire with a cross-section of  $A = 1.0 \text{ mm}^2$  is used. The power dissipation (= heat flow) of  $P = 40 \text{ W}$  is necessary.

Calculate the current  $I$  needed to operate it.

The Nichrome wire has a resistivity of  $\rho = 1.10 \cdot 10^{-6} \text{ }\Omega \cdot \text{m}$ .

The heating element is  $l = 3 \text{ m}$  long and has a diameter of  $d = 3.57 \text{ mm}$ .

Calculate the resistance  $R$  of the heating element.

Solution

$$P = U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}}$$

$$\sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \cdot \Omega}} \quad \text{align*}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \& \quad l = r^2 \cdot \pi = \\ \frac{1}{4} d^2 \cdot \pi \quad \& \quad R &= \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \& \quad R = \\ 1.10 \cdot 10^{-6} \cdot \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \quad \& \quad \end{aligned} \quad \text{align*}$$

## Exercise E1 Charging Capacitors


(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (without the light bulb) also is the circuit of Exercise 2. The voltage across the capacitor is again  $0 \text{ V}$  at the moment  $t_0 = 0 \text{ s}$  when the switch  $S_1$  is closed. Calculate the voltage  $u_c(t_2)$  across the capacitor at  $t_2 = 1 \text{ ms}$  after closing the switch.

**Solution** Hint: To solve this, first create an equivalent linear voltage source from  $U$ ,  $R_1$ , and  $R_2$ .

**Solution** The ideal voltage source  $U = 12 \text{ V}$  is in series with the resistor  $R_1 = 20 \Omega$ . The voltage  $u_c(t)$  is independent of this series combination.

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting  $S_2$ .

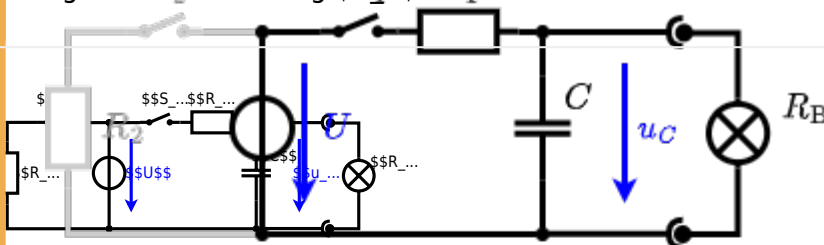


The circuit contains a voltage source  $U = 12 \text{ V}$ , a switch  $S_1$ , a resistor of  $R_1 = 20 \Omega$  and a capacitor of  $C = 100 \mu\text{F}$ .

The switch  $S_2$  to an additional consumer  $R_2$  will be considered to be open for the first tasks. At the moment  $t_0 = 0 \text{ s}$  the switch  $S_1$  is closed, the voltage across the capacitor is  $u_c(t_0) = 0 \text{ V}$ .

.. First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time  $t_1$  when  $u_c(t_1) = 0.5 \cdot U$ .

**Solution**

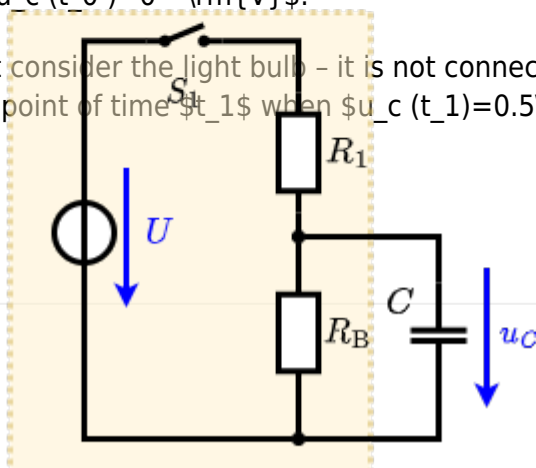

An equivalent linear voltage source can be given with  $U_s$ ,  $R_1$ , and  $R_B$  as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is:  $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$ . The internal resistance is given by substituting the ideal voltage source with its resistance ( $= 0 \Omega$ , short-circuit).

$$R_i = R_1 \parallel R_B = 10 \Omega$$

$$u_c(t) = U_s \cdot (1 - e^{-t/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-t/(10 \Omega \cdot 100 \mu F)})$$

The following formula describes the time course of  $u_c(t)$  which has to be  $u_c(t_1) = 0.5 \cdot U$ : 
$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to  $(1 - e^{-t/\tau}) = 0.5 \implies e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) \implies t = R_1 \cdot C \cdot \ln(0.5)$


### Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be simplified with  $R_1 = 200 \Omega$ ,  $R_2 = 100 \Omega$ ,  $R_3 = 150 \Omega$ ,  $R_4 = 100 \Omega$  and the voltage source  $U = 10 \text{ V}$ .  $R_B$  is given.

Solution

$$R_{\text{eq}} = 132.8 \Omega$$

Now a wye-delta transformation is necessary.

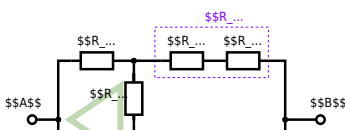

Since  $R_2 = R_3$  and based on the equations for the transformation, the transformed  $R_Y$  is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \, \Omega + (33.33 \, \Omega + 400 \, \Omega) \parallel (33.33 \, \Omega + 100 \, \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance  $R_{\text{eq}}$  between A and B.

Solution

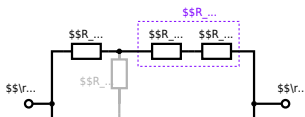

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \sim \Omega + 200 \sim \Omega + 200 \sim \Omega) \parallel (100 \sim \Omega + 100 \sim \Omega) \parallel R_{\text{eq}} = (500 \sim \Omega) \parallel (200 \sim \Omega) \parallel R_{\text{eq}} = \frac{500 \sim \Omega \cdot 200 \sim \Omega}{500 \sim \Omega + 200 \sim \Omega}$$

From:

<https://wiki.mexle.te.hs-heilbronn.de/> - **MEXLE Wiki**

Permanent link:

[https://wiki.mexle.te.hs-heilbronn.de/ee1/ws2022\\_exam\\_r](https://wiki.mexle.te.hs-heilbronn.de/ee1/ws2022_exam_r)

Last update: **2023/03/31 12:10**

