

Exam Winter Semester 2022

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	3
Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	6
Exercise E1 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	7
Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	7
Exercise E1 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	11
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	11
Exercise E1 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022)	12
Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	13
Exercise E4 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	15
Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	19
Exercise E6 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	20
Exercise E8 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	20
Exercise E7 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	24
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	24
Exercise E5 Charging Capacitors (written test, approx. 16 % of a 60-minute written test,	


WS2022)	25
Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	26

~~#@ee1_taskctr.#~~

Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.
Result


$$\begin{aligned} U_{\text{rs}} &= U_{\text{AB}} = 4.5 \text{ V} \\ R_{\text{i}} &= R_{\text{AB}} = 6 \text{ } \Omega \end{aligned}$$

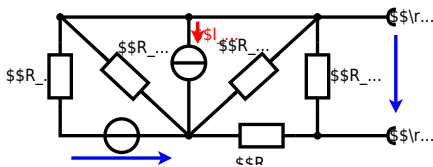


Calculated the internal resistance R_{i} and the source voltage U_{rs} of an equivalent linear voltage source on the connectors A and B .
$$\begin{aligned} R_1 &= 5.0 \text{ } \Omega, \quad U_2 = 6.0 \text{ V}, \quad R_3 = 10 \text{ } \Omega, \quad I_4 = 4.2 \text{ A}, \\ R_5 &= 10 \text{ } \Omega, \quad R_6 = 7.5 \text{ } \Omega, \quad R_7 = 15 \text{ } \Omega \end{aligned}$$
 Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

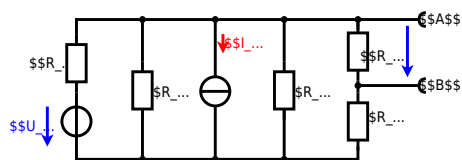

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

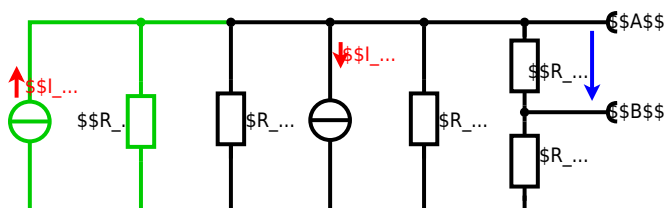

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :
$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_2}{R_1} - I_4$$
 The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:
$$U_{24} = I_{24} \cdot R_2$$

$$I_{24} = \frac{U_{24}}{R_6 + R_1 \parallel R_3 \parallel R_5} = \frac{(U_2 - I_4 R_1)}{R_6 + R_1 \parallel R_3 \parallel R_5}$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} = \frac{(U_2 - I_4 R_1) \cdot R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0\Omega$, so a short-circuit):

$$R_{AB} = R_7 \parallel (R_6 + R_1 \parallel R_3 \parallel R_5)$$

with $R_1 \parallel R_3 \parallel R_5 = 5\Omega \parallel 10\Omega \parallel 10\Omega = 5\Omega \parallel 5\Omega = 2.5\Omega$:

$$U_{AB} = \frac{6.0V}{5.0\Omega} - 4.2\Omega \cdot \frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega} \quad R_{AB} = 15\Omega \parallel (7.5\Omega + 2.5\Omega)$$

~~#@ee1_taskctr.##~~

Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. The diagram shows a thermistor with a resistance of 10Ω at 25°C . The thermistor has a resistance of 10Ω at 25°C and 1Ω at 40°C . Your answer.

Its temperature coefficients are: $\alpha = 0.01 \frac{1}{\text{K}}$ and $\beta = 71 \cdot 10^{-6} \frac{1}{\text{K}^2}$.

Result
The temperature inside the refrigeration system can reach down to -40°C .

$$R = 10\Omega \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) = 10\Omega \cdot (1 + 0.01 \cdot (-40 - 25) + 71 \cdot 10^{-6} \cdot (-40 - 25)^2)$$

The power of the resistor $P = \frac{U^2}{R}$ and the heat flow $\dot{Q} = \frac{P}{\eta}$. Therefore, a solution is to use a heat pump up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) \quad \text{with } \Delta T = T_{\text{end}} - T_{\text{start}} \quad R = 10\Omega \cdot (1 + 0.01 \cdot (-40 - 25) + 71 \cdot 10^{-6} \cdot (-40 - 25)^2)$$

```
~~#@ee1_taskctr.##~~
```

Exercise E1 Analyzing complex Impedances

(written test, approx. 14 % of a 60-minute written test, WS2022)

A. New Hire: If the employee is hired on or after 12/31/2015, the employee shall be given the Result components. (\$R\$ and \$X_1\$) shall be given.

After canapose, the full low dimension joint impedance is extracted and plotted (figure 1) in horizontal (Z), lateral (Y) and vertical (X) movement. $\Omega = \sqrt{\frac{1}{m} \left(\frac{1}{\omega_1^2} + \frac{1}{\omega_2^2} + \frac{1}{\omega_3^2} \right)}$

.. Categorical physical values of the variables.

$$\text{solve} \begin{Bmatrix} \text{align*} & \text{R} & \text{and} & 0.12 & \text{H} & \text{and} & 0.67 & \text{and} & 0.22 & \text{and} & 0.06 \end{Bmatrix} \end{Bmatrix}$$

Solution

[illegible]

```
~~#@ee1 taskctr.##~~
```

Exercise E1 Complex Impedance Circuit

(written test, approx. 15 % of a 60-minute written test, WS2022)

[illegible]


Solution A linear source is connected with an inductor of $330 \sim \{\rm \mu H\}$ and a capacitor of $0.22 \sim \{\rm \mu F\}$, all in series.

Result

.. Draw the circuit diagram of the given circuit. $48.2 \sim \Omega$ & $19.8 \sim \Omega$

label all components, voltages, and currents.

[illegible]

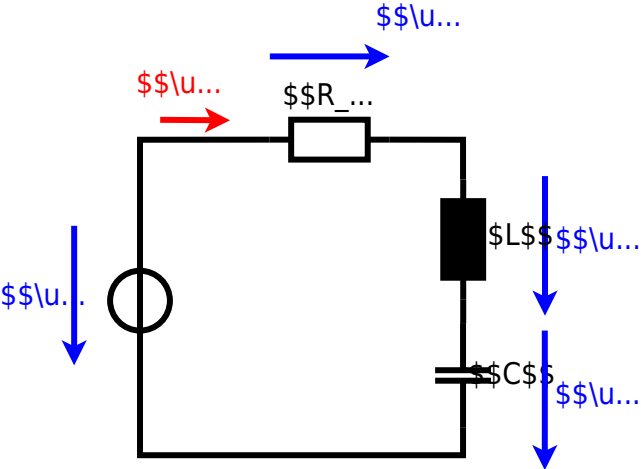

~~#@ee1_taskctr.##~~

Exercise E1 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)

2. A series circuit consists of a resistor with a resistance of $R_1 = 1.00 \text{ k}\Omega$, a capacitor with a capacitance of $C_1 = 40 \text{ nF}$, and an AC voltage source with a voltage of $U = 230 \text{ V}$ and a frequency of $f = 50 \text{ Hz}$. The current in the circuit is $I = 10 \text{ mA}$. The resistor R_1 shall have the same absolute value of the impedance as a capacitor $C_1 = 40 \text{ nF}$ at $f_1 = 4 \text{ MHz}$.

Solution

$$\begin{aligned} R_1 &= 1.00 \text{ k}\Omega \end{aligned}$$

$$C_1 = 40 \text{ nF}$$

A series circuit means that the current is constant on every component.

The equivalent impedance for R_1 and C_1 combined is given by

$$Z_{\text{eq}} = R_1 + \frac{1}{j\omega C_1} = R_1 - j\frac{1}{\omega C_1}$$

Since R_1 and C_1 are in series, the voltage across R_1 is $U_{R_1} = I \cdot R_1$ and the voltage across C_1 is $U_{C_1} = I \cdot \frac{1}{\omega C_1}$. The voltage across the combination is $U = U_{R_1} + U_{C_1}$.

Therefore, the resulting current of the parallel circuit is given as:

$$I = \frac{U}{Z_{\text{eq}}} = \frac{U}{R_1 - j\frac{1}{\omega C_1}}$$

$$I^2 = \frac{U^2}{R_1^2 + \left(\frac{1}{\omega C_1}\right)^2}$$

$$R_1^2 = \frac{U^2}{I^2} - \left(\frac{1}{\omega C_1}\right)^2$$

$$R_1 = \sqrt{\frac{U^2}{I^2} - \left(\frac{1}{\omega C_1}\right)^2}$$

~~#@ee1_taskctr.##~~

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

2. The heating element is used to heat the wire with a temperature of $T = 1800 \text{ K}$. The power dissipation (= heat flow) of $P = 40 \text{ W}$ is necessary.

Calculate the current I in the heating element.

The Nichrome wire has a resistivity of $\rho = 1.10 \cdot 10^{-6} \text{ }\Omega \cdot \text{m}$.

The heating element is $l = 3 \text{ m}$ long and has a diameter of $d = 3.57 \text{ mm}$.

Calculate the resistance R of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \& \quad A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \quad \& \quad R = \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \& \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

~~#@ee1_taskctr.##~~

Exercise E1 Charging Capacitors

(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (without the light bulb) also in the form of a RC circuit is shown. The capacitor is initially uncharged. The voltage across the capacitor is again 0 V at the moment $t_0 = 0 \text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.


Solution

Hint: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

$$\begin{aligned} \Delta U &= U - \frac{R_2}{R_1 + R_2} U \end{aligned}$$

Solution $\Delta U = U - \frac{R_2}{R_1 + R_2} U = \frac{R_1}{R_1 + R_2} U = \frac{20 \text{ } \Omega}{20 \text{ } \Omega + 10 \text{ } \Omega} \cdot 12 \text{ V} = 8 \text{ V}$

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .

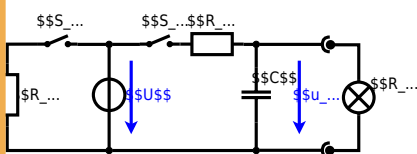


The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ } \Omega$ and a capacitor of $C = 100 \text{ } \mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first tasks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

1. First do not consider the light bulb – it is not connected to the RC circuit.

Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

Solution

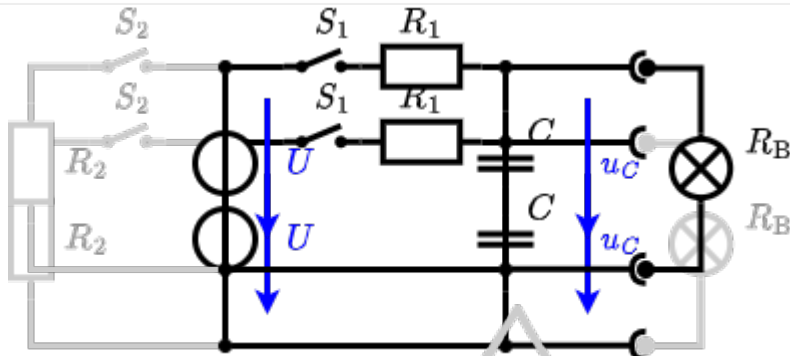


So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_C(t)$ which has to be $u_c(t_1) = 0.5 \cdot U$:

$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$

It has to be rearranged to t
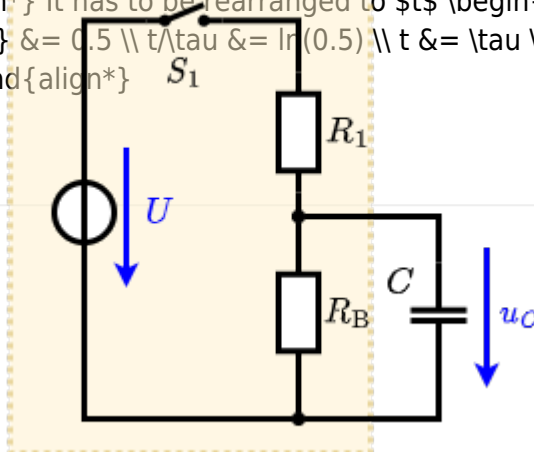
$$(1 - e^{-t/\tau}) = 0.5 \implies e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$$


An equivalent linear voltage source can be given with U , R_1 , and R_{B} as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = 1/2 \cdot U$ The internal resistance is given by substituting the ideal voltage source with its resistance ($=0 \sim \Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10 \sim \Omega$$


$$\begin{aligned} u_c(t_2) &= U_s \cdot (1 - e^{t_2/(R_i \cdot C)}) \parallel \&= \{1\over 2\} \\ &\cdot U \cdot (1 - e^{1 \sim \rm{ms}/(10 \sim \Omega \cdot 100 \sim \rm{\mu F})}) \end{aligned}$$

```
~~#@ee1 taskctr.##~~
```

Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall in with \$ Rise 200 at 0 ntegrate, \$ Qu 2 a R e 1 1 5 6 t a n O e s a f a n d u p s w e l l e n
B e u l A o i e d . \$ \rm B\$.

Solution

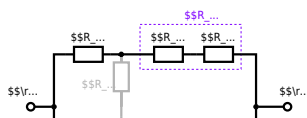

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_3) \parallel (R_2 + R_3) \parallel R_4$$

$$R_{\text{eq}} = (100 \, \Omega + 200 \, \Omega + 200 \, \Omega) \parallel (100 \, \Omega + 100 \, \Omega) \parallel R_4$$

$$R_{\text{eq}} = (500 \, \Omega) \parallel (200 \, \Omega) \parallel R_4$$

$$R_{\text{eq}} = \frac{500 \, \Omega \cdot 200 \, \Omega}{500 \, \Omega + 200 \, \Omega} \parallel R_4$$

~~#@ee1_taskctr.#~~

Exercise E4 Equivalent linear Source


(written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.

Result

$$U_s = U_{AB} = 4.5 \, \text{V}$$


$$R_i = R_{AB} = 6 \, \Omega$$

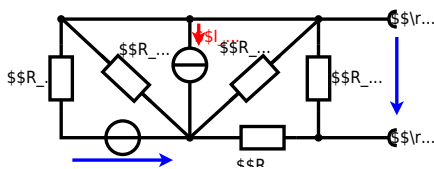


Calculate the internal resistance R_s and the source voltage U_s of an equivalent linear voltage source on the connectors A and B.
$$\begin{aligned} R_1 &= 5.0 \, \Omega, \quad U_2 = 6.0 \, \text{V}, \quad R_3 = 10 \, \Omega, \quad I_4 = 4.2 \, \text{A}, \\ R_5 &= 10 \, \Omega, \quad R_6 = 7.5 \, \Omega, \quad R_7 = 15 \, \Omega \end{aligned}$$
 Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

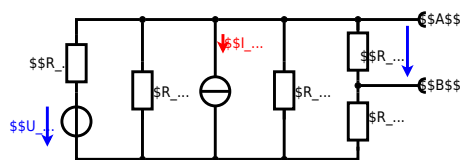

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

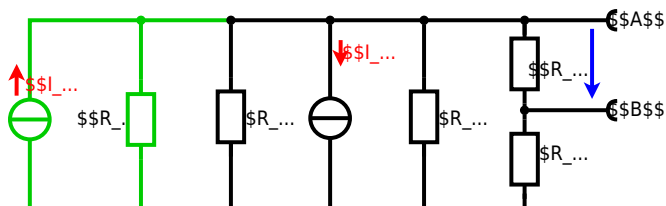

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_2}{R_1} - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{135}$$

$$I_{24} = \frac{U_{24}}{R_6 + R_7 + R_1 || R_3 || R_5} = \frac{(U_2 - I_4) \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5}$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} = (U_2 - I_4) \cdot \frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0 \Omega$, so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \Omega \cdot \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \quad R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

~~#@ee1_taskctr.##~~

Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. The diagram below shows a temperature-dependent resistor. The resistor has a resistance of $10 \text{ k}\Omega$ at 25°C and a temperature coefficient of $\alpha = 0.01 \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$. Calculate the resistance of the thermistor at -40°C .

Its temperature coefficients are: $\alpha = 0.01 \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$.

Result The temperature inside the refrigeration system can reach down to -40°C .


$$R = 10 \text{ k}\Omega \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) = 10 \text{ k}\Omega \cdot (1 + 0.01 \cdot (-40 - 25) + 71 \cdot 10^{-6} \cdot (-40 - 25)^2)$$


The power of the resistor is $P = U^2 / R$. The power decreases ten times more resistance decreases the heat flow to one-tenth.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) \quad \text{with } \Delta T = T_{\text{end}} - T_{\text{start}} \quad R = 10 \text{ k}\Omega \cdot (1 + 0.01 \cdot (-40 - 25) + 71 \cdot 10^{-6} \cdot (-40 - 25)^2)$$

[illegible]

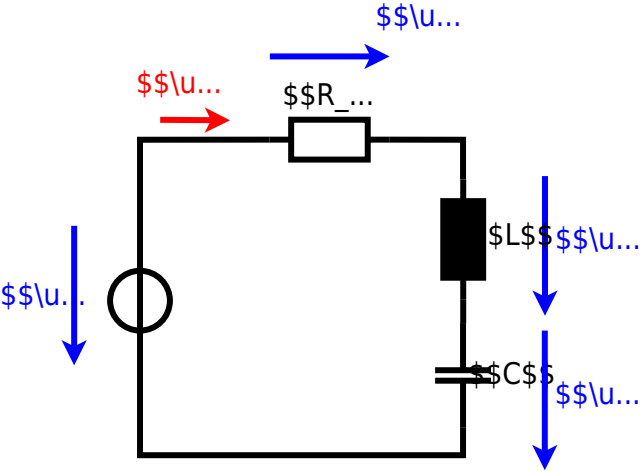

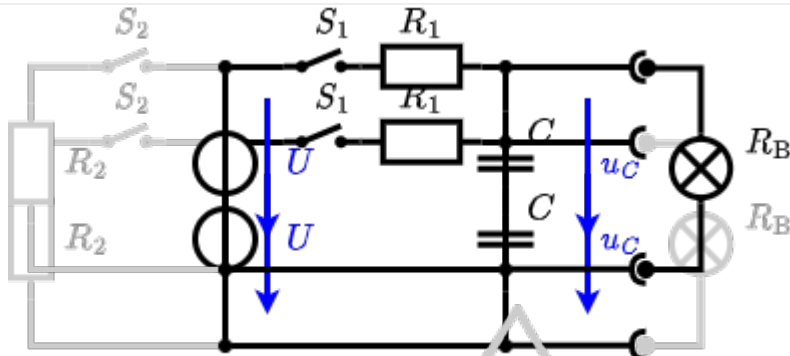


So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_c(t)$ which has to be $u_c(t_1) = 0.5 \cdot U$:

$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$

It has to be rearranged to t :
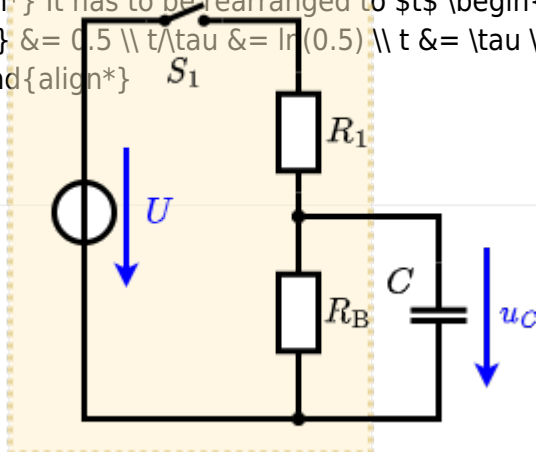
$$(1 - e^{-t/\tau}) = 0.5 \implies e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$$


An equivalent linear voltage source can be given with U , R_1 , and R_{B} as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = 1/2 \cdot U$ The internal resistance is given by substituting the ideal voltage source with its resistance ($=0 \sim \Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10 \sim \Omega$$

$$\begin{aligned} u_c(t_2) &= U_s \cdot (1 - e^{t_2/(R_i \cdot C)}) \parallel \&= \{1\over 2\} \\ &\cdot U \cdot (1 - e^{1 \sim \rm{ms}/(10 \sim \Omega \cdot 100 \sim \rm{\mu F})}) \end{aligned}$$

```
~~#@ee1 taskctr.#~~
```


Exercise E3 Pure Resistor Network Simplification

(written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall in with \$ Rise 200 at 0 rate the, \$ Ru 2 a R 3 = 1 5 0 0 a n d C e n s a f r a n d e d h s s w e t w e n
B e s t A d v i s e d . \$ \rm B\$.

Solution

$R_{\text{eq}} = R_1 + R_2 + R_3 + R_4 + R_5 + R_6 + R_7 + R_8 + R_9 + R_{10} + R_{11} + R_{12} + R_{13} + R_{14} + R_{15} + R_{16} + R_{17} + R_{18} + R_{19} + R_{20} + R_{21} + R_{22} + R_{23} + R_{24} + R_{25} + R_{26} + R_{27} + R_{28} + R_{29} + R_{30} + R_{31} + R_{32} + R_{33} + R_{34} + R_{35} + R_{36} + R_{37} + R_{38} + R_{39} + R_{40} + R_{41} + R_{42} + R_{43} + R_{44} + R_{45} + R_{46} + R_{47} + R_{48} + R_{49} + R_{50} + R_{51} + R_{52} + R_{53} + R_{54} + R_{55} + R_{56} + R_{57} + R_{58} + R_{59} + R_{60} + R_{61} + R_{62} + R_{63} + R_{64} + R_{65} + R_{66} + R_{67} + R_{68} + R_{69} + R_{70} + R_{71} + R_{72} + R_{73} + R_{74} + R_{75} + R_{76} + R_{77} + R_{78} + R_{79} + R_{80} + R_{81} + R_{82} + R_{83} + R_{84} + R_{85} + R_{86} + R_{87} + R_{88} + R_{89} + R_{90} + R_{91} + R_{92} + R_{93} + R_{94} + R_{95} + R_{96} + R_{97} + R_{98} + R_{99} + R_{100}$

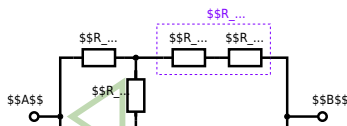

Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \, \Omega + (33.33 \, \Omega + 400 \, \Omega) \parallel (33.33 \, \Omega + 100 \, \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

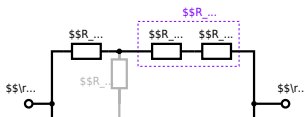

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel (100 \sim \Omega + 200 \sim \Omega + 200 \sim \Omega) \parallel (100 \sim \Omega + 100 \sim \Omega) \parallel (500 \sim \Omega) \parallel (200 \sim \Omega) \parallel R_{\text{eq}} = \{ \{ 500 \sim \Omega \cdot 200 \sim \Omega \} \over {500 \sim \Omega + 200 \sim \Omega} \} \parallel$$

From:

<https://wiki.mexle.te.hs-heilbronn.de/> - MEXLE Wiki

Permanent link:

https://wiki.mexle.te.hs-heilbronn.de/electrical_engineering_1/ws2022_exam?rev=1678504927

Last update: **2023/03/11 04:22**

