

Exam Winter Semester 2022

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	3
Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	6
Exercise E1 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	7
Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	7
Exercise E1 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	11
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	11
Exercise E1 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022)	12
Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	13
Exercise E4 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	15
Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	19
Exercise E6 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	20
Exercise E8 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	20
Exercise E7 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	24
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	24
Exercise E5 Charging Capacitors (written test, approx. 16 % of a 60-minute written test,	


WS2022)	25
Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	26

d

Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.
Result


$$\begin{aligned} U_{\text{rs}} &= U_{\text{AB}} = 4.5 \text{ V} \\ R_{\text{i}} &= R_{\text{AB}} = 6 \Omega \end{aligned}$$

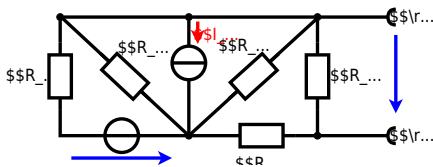


Calculated the internal resistance R_{i} and the source voltage U_{rs} of an equivalent linear voltage source on the connectors A and B . $\begin{aligned} R_1 &= 5.0 \Omega, \quad U_2 = 6.0 \text{ V}, \quad R_3 = 10 \Omega, \quad I_4 = 4.2 \text{ A}, \\ R_5 &= 10 \Omega, \quad R_6 = 7.5 \Omega, \quad R_7 = 15 \Omega \end{aligned}$ Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

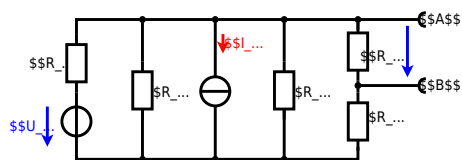

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

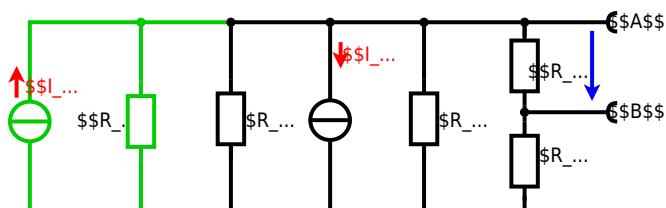

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_{24} and I_{13} :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_{24} - I_{13} = \frac{U_{24}}{R_1} - I_{13}$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{135}$$

$$I_{24} = \frac{U_{24}}{R_6 + R_7 + R_1 || R_3 || R_5} = \frac{(U_2 - I_4) \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5}$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} = (U_2 - I_4) \cdot \frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0\Omega$, so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5\Omega || 10\Omega || 10\Omega = 5\Omega || 5\Omega = 2.5\Omega$:

$$U_{AB} = \frac{6.0V}{5.0\Omega} - 4.2\Omega \cdot \frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega} || R_{AB} = 15\Omega || (7.5\Omega + 2.5\Omega)$$

d

Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. The given diagram explains the effect of temperature on the resistance of a thermistor. It has a resistance of $10\text{ k}\Omega$ at 25°C and $2.5\text{ k}\Omega$ at 40°C . Your answer.

Its temperature coefficients are: $\alpha = 0.01 \frac{1}{\text{K}}$ and $\beta = 71 \cdot 10^{-6} \frac{1}{\text{K}^2}$.

Result The temperature inside the refrigeration system can reach down to -40°C .

$$R = 6.5 \text{ k}\Omega \text{ at } -40^\circ\text{C}.$$

The power of the resistor $P = U^2 / R$ and $U = 20\text{ V}$ is constant. Therefore, a solution is to use a higher resistance up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) \quad | \quad \Delta T = T_{\text{end}} - T_{\text{start}} \\ R = 10 \text{ k}\Omega \cdot \left((1 + 0.01 \frac{1}{\text{K}} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \frac{1}{\text{K}^2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2) \right)$$

d

Exercise E1 Analyzing complex Impedances

(written test, approx. 14 % of a 60-minute written test, WS2022)

2. **Drawn** and the pool has been completed then (Rule 5 (c) m 2) \$ 3130 (underline) shall be given to the Result Components. (\$\$ and \$ \underline{X} 1\$) shall be given.

After analysis, the following dimensionless parameters have been extracted and denoted (figure) in the table (Table 1). The (2) have been (3) + 5 (4) \Omega \end{align*}

.. Calculation of the 103 values of the vector components.

$$\text{solve}(\text{begin}\{align*\} \quad R_{\text{und}}(0.24) \cdot V_{\text{om}} \approx 10.67 \text{ \– } 12.26 \quad \backslash\!\!\!\backslash\text{marmphi} \quad i \text{ \– } 27.06^\circ \end{align*})$$

Solution

$$\frac{V}{Z} = \frac{V}{\sqrt{R^2 + X_L^2}} = \frac{120}{\sqrt{4.68^2 + 300^2}} = 0.4$$
 The rms current is 0.4 A. The rms voltage across the resistor is $V_R = IR = 1.87$ V. The rms voltage across the inductor is $V_L = IX_L = 138$ V. The rms voltage across the source is $V_s = \sqrt{V_R^2 + V_L^2} = 138.5$ V. The rms voltage across the source is 138.5 V. The rms voltage across the source is 138.5 V.

d

Exercise E1 Complex Impedance Circuit

(written test, approx. 15 % of a 60-minute written test, WS2022)

2. On a wide thin surface perpendicular to the signal $\vec{E}_0$ and $\vec{B}_0$ and $\vec{E}_0$ and $\vec{B}_0$ are parallel to $\vec{E}$ and $\vec{B}$ the electric field $\vec{E}$ is $E(t) = 3.0 \sim \text{V} \cdot \sin(2\pi \cdot 15 \sim \text{Hz})$ and the magnetic field $\vec{B}$ is $B(t) = 1.0 \sim \text{T} \cdot \cos(2\pi \cdot 15 \sim \text{Hz})$. The electric field $\vec{E}$ and the magnetic field $\vec{B}$ are perpendicular to each other and to the direction of propagation of the wave. The electric field $\vec{E}$ and the magnetic field $\vec{B}$ are perpendicular to each other and to the direction of propagation of the wave. The electric field $\vec{E}$ and the magnetic field $\vec{B}$ are perpendicular to each other and to the direction of propagation of the wave.


Solution A linear source is connected with an inductor of $330 \sim \{\rm \mu H\}$ and a capacitor of $0.22 \sim \{\rm \mu F\}$, all in series.

Result

.. Draw the circuit diagram of the given circuit. (5 marks)

Label all components, voltages, and currents.

[illegible]

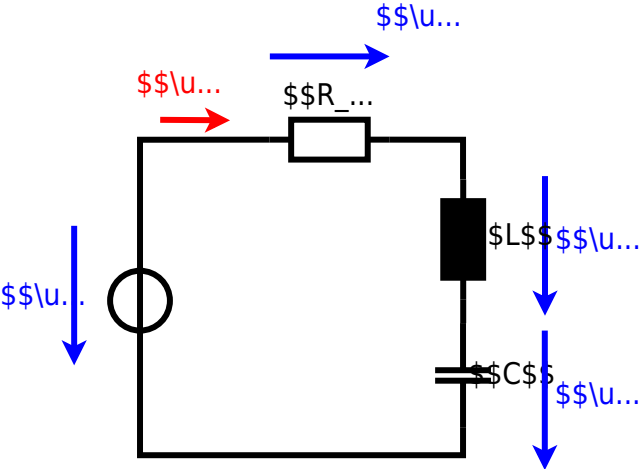

d

Exercise E1 Impedances at different Frequencies

(written test, approx. 18 % of a 60-minute written test, WS2022)

[illegible]

Solution

$$\text{Solution} \quad R_1 = 1.00 \sim \Omega$$

$$\text{Solution: } R_2 \approx 10.0 \sim \Omega$$

A series circuit means that the current is constant on every component.

The equivalent impedance for R and L combined is given by

Parallel circuit means that the voltage is the same on SR and SQ. $V = R_2 + V_{\text{coil}}$. Since ωL is perpendicular to R , $X = \sqrt{R^2 + (\omega L)^2}$.

$\{ \underline{R_2} \}^2 + \{ X \{ L_2 \} \}^2$

Therefore, the resulting current of the parallel circuit is given as: \begin{align*}

$$\underline{I}^3 \&= \underline{I}^{3R} + \underline{I}^{3C} \setminus$$

[illegible]

$$\left. \right)^2 - (2\pi \cdot 450 \sim \{\rm kHz\} \cdot 4.7 \sim \{\rm \mu H\})^2 \} \quad \end{align*}$$

Back to the first formula:
$$R_3 \cdot \{I\} \{3R\} = \{X\} \{3C\} \cdot$$

$$\{I\} \setminus \{C\} \cap R \neq \{X\} \setminus \{C\} \cdot \frac{\{\{I\} \setminus \{C\}\}}{\{I\} \setminus \{R\}} \cap \{C\}$$

$$\frac{\{1\}}{2\pi \cdot f \cdot C_3} \cdot \{\sqrt{|I_3|}^2 -$$

$$\frac{\{I\} \{3R\}^2}{\{I\} \{3R\}} \quad \end{align*}$$

d

Exercise E1 Resistance of a Wire by Resistivity

(written test, approx. 6 % of a 60-minute written test, WS2022)

Result power dissipation (= heat flow) of $P=40 \text{ W}$ is necessary.

Do not use the current \$N\$ needed to operate for heating elements.

The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6} \sim \Omega \text{ m}$.

The heating element is 3 m long and has a diameter of 3.57 mm .

Calculate the resistance R of the negative cement.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \& \quad A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \quad \& \quad R = \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \& \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

d

Exercise E1 Charging Capacitors

(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (without the light bulb) also takes the form of an RC circuit. The voltage across the capacitor is again $U_c(t_0) = 0 \text{ V}$ at the moment $t_0 = 0 \text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.


Solution

Hint: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

$$\Delta U = U - \frac{R_2}{R_1 + R_2} U$$

Solution **Part 1** **Delta U** $\Delta U = U - \frac{R_2}{R_1 + R_2} U = 12 \text{ V} - \frac{20 \text{ } \Omega}{10 \text{ } \Omega + 20 \text{ } \Omega} \cdot 12 \text{ V} = 8 \text{ V}$

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .

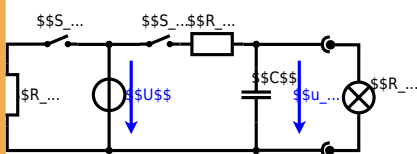


The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ } \Omega$ and a capacitor of $C = 100 \text{ } \mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first tasks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

1. First do not consider the light bulb – it is not connected to the RC circuit.

Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

Solution

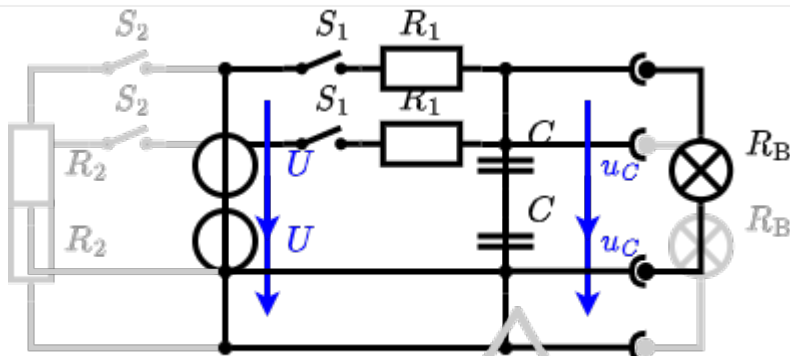


So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_C(t)$ which has to be $u_C(t_1) = 0.5 \cdot U$:

$$u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$

It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5$
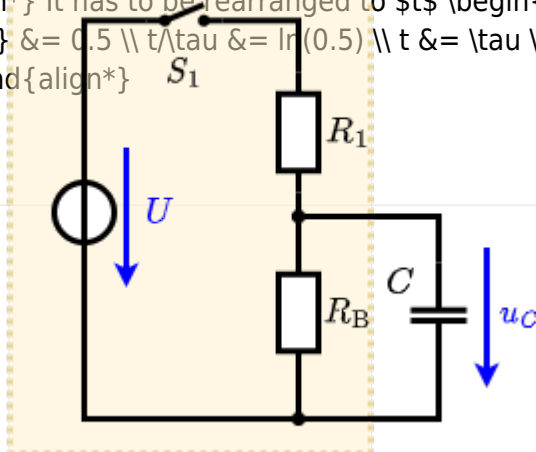
$$e^{-t/\tau} = 0.5 \quad t/\tau = \ln(0.5) \quad t = \tau \cdot \ln(0.5) \quad t = R_1 \cdot C \cdot \ln(0.5)$$


An equivalent linear voltage source can be given with U , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$ The internal resistance is given by substituting the ideal voltage source with its resistance ($= 0 \, \Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10 \, \Omega$$

$$u_C(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ ms} / (10 \, \Omega \cdot 100 \, \mu\text{F})})$$


d

Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at 0 temperature, $R_1 = R_2 = 10 \, \Omega$, $R_3 = 10 \, \Omega$, $R_4 = 10 \, \Omega$, and the voltage source $U = 10 \, \text{V}$. Result given: R_B .

Solution

$$R_{\text{eq}} = R_1 + R_2 + R_3 + R_4 + R_5 + R_6 + R_7 + R_8 + R_9 + R_{10} + R_{11} + R_{12} + R_{13} + R_{14} + R_{15} + R_{16} + R_{17} + R_{18} + R_{19} + R_{20} + R_{21} + R_{22} + R_{23} + R_{24} + R_{25} + R_{26} + R_{27} + R_{28} + R_{29} + R_{30} + R_{31} + R_{32} + R_{33} + R_{34} + R_{35} + R_{36} + R_{37} + R_{38} + R_{39} + R_{40} + R_{41} + R_{42} + R_{43} + R_{44} + R_{45} + R_{46} + R_{47} + R_{48} + R_{49} + R_{50} + R_{51} + R_{52} + R_{53} + R_{54} + R_{55} + R_{56} + R_{57} + R_{58} + R_{59} + R_{60} + R_{61} + R_{62} + R_{63} + R_{64} + R_{65} + R_{66} + R_{67} + R_{68} + R_{69} + R_{70} + R_{71} + R_{72} + R_{73} + R_{74} + R_{75} + R_{76} + R_{77} + R_{78} + R_{79} + R_{80} + R_{81} + R_{82} + R_{83} + R_{84} + R_{85} + R_{86} + R_{87} + R_{88} + R_{89} + R_{90} + R_{91} + R_{92} + R_{93} + R_{94} + R_{95} + R_{96} + R_{97} + R_{98} + R_{99} + R_{100}$$

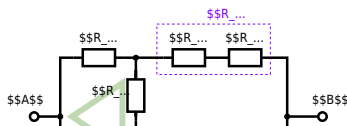

Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \, \Omega + (33.33 \, \Omega + 400 \, \Omega) \parallel (33.33 \, \Omega + 100 \, \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

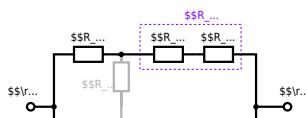

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_3) \parallel (R_4 + R_5) \parallel R_L$$

$$R_{\text{eq}} = (100 \, \Omega + 200 \, \Omega + 200 \, \Omega) \parallel (100 \, \Omega + 100 \, \Omega) \parallel R_L$$

$$R_{\text{eq}} = (500 \, \Omega) \parallel (200 \, \Omega) \parallel R_L$$

$$R_{\text{eq}} = \frac{500 \, \Omega \cdot 200 \, \Omega}{500 \, \Omega + 200 \, \Omega} \parallel R_L$$

d

Exercise E4 Equivalent linear Source


(written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.

Result

$$U_{\text{s}} = U_{\text{AB}} = 4.5 \, \text{V}$$


$$R_{\text{i}} = R_{\text{AB}} = 6 \, \Omega$$

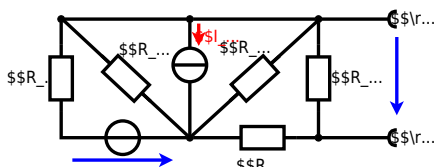


Calculate the internal resistance R_i and the source voltage U_s of an equivalent linear voltage source on the connectors A and B. $\begin{aligned} R_1 &= 5.0 \, \Omega, \quad U_2 = 6.0 \, \text{V}, \quad R_3 = 10 \, \Omega, \quad I_4 = 4.2 \, \text{A}, \\ R_5 &= 10 \, \Omega, \quad R_6 = 7.5 \, \Omega, \quad R_7 = 15 \, \Omega \end{aligned}$ Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

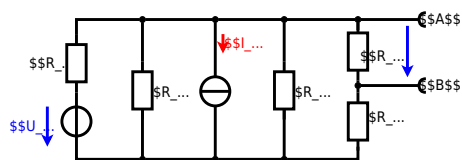

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

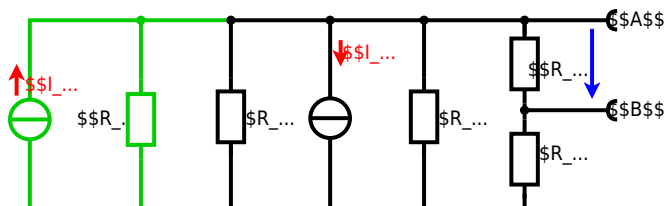

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_2}{R_1} - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{135}$$

$$I_{24} = \frac{U_{24}}{R_6 + R_7 + R_1 || R_3 || R_5} = \frac{(U_2 - I_4) \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5}$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} = (U_2 - I_4) \cdot \frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0\Omega$, so a short-circuit): $R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$

with $R_1 || R_3 || R_5 = 5\Omega || 10\Omega || 10\Omega = 5\Omega || 5\Omega = 2.5\Omega$:

$$U_{AB} = \frac{6.0V}{5.0\Omega} - 4.2\Omega \cdot \frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega} \quad R_{AB} = 15\Omega || (7.5\Omega + 2.5\Omega)$$

d

Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. The given diagram explains a temperature sensor in a refrigeration system. The sensor has a resistance of 10Ω at 25°C and 25Ω at 40°C . Your answer.

Its temperature coefficients are: $\alpha = 0.01 \frac{1}{K}$ and $\beta = 71 \cdot 10^{-6} \frac{1}{K^2}$

Result The temperature inside the refrigeration system can reach down to -40°C .

$$R = 10\Omega \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) = 25\Omega \quad \Delta T = 15^\circ\text{C}$$

The power of the resistor $P = U^2 / R$ and $U = 20V$ is $P = 80W$. Therefore, a solution is to use a heat exchanger up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) \quad \text{with } \Delta T = T_{\text{end}} - T_{\text{start}} \quad R = 10\Omega \cdot (1 + 0.01 \cdot (-40 - 25) + 71 \cdot 10^{-6} \cdot (-40 - 25)^2)$$

d

Exercise E6 Analyzing complex Impedances

(written test, approx. 14 % of a 60-minute written test, WS2022)

A. New Hire Incentive Program: The new hire shall be given \$10,000 (\$5,000 cash and \$5,000 in stock) as a bonus for the first year of employment. The bonus shall be given in two installments, \$5,000 at the end of the first year and \$5,000 at the end of the second year. The bonus shall be given to the new hire regardless of whether the new hire is a full-time or part-time employee.

After canapose, the full low dimension joint impedance is extracted and plotted (figure) in horizontal (Z), lateral (Y) and vertical (X) movement. ω_j is the joint frequency.

.. Categorical physical values of the variables.

$$\text{solve} \begin{Bmatrix} \text{align*} & \text{R} & \text{and} & 0.12 & \text{H} & \text{and} & 0.67 & \text{and} & 0.22 & \text{and} & 0.06 \end{Bmatrix} \end{Bmatrix}$$

Solution

$$\begin{aligned} \text{The complex part comes from the physical value } & \varphi_i = \arctan\left(\frac{|\text{Im}()|}{|\text{Re}()|}\right) \\ & = \arctan\left(\frac{-4.68 \sim \Omega}{0.24 \sim \Omega}\right) \\ \text{The phase } \varphi_i & \text{ can be calculated as } \end{aligned}$$

d

Exercise E8 Complex Impedance Circuit

(written test, approx. 15 % of a 60-minute written test, WS2022)

A. On a three-turn circular loop of radius R , a series of N turns of wire is wound. The current in the wire is i . The magnetic field at the center of the loop is B . The magnetic field at the center of the loop is B . The magnetic field at the center of the loop is B .


Solution A linear source is connected with an inductor of $330 \sim \{\rm \mu H\}$ and a capacitor of $0.22 \sim \{\rm \mu F\}$, all in series.

Result

.. Draw the circuit diagram of the given circuit. $48.2 \sim \Omega$ & $19.8 \sim \Omega$

label all components, voltages, and currents.

[illegible]

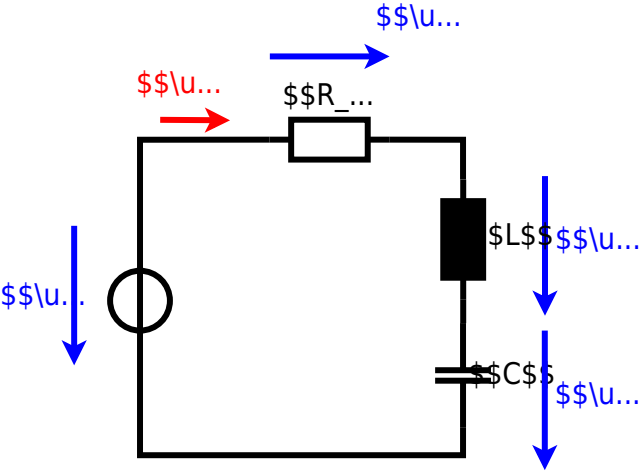

d

Exercise E7 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)

2. A series circuit consists of a resistor with $R_1 = 1.00 \text{ k}\Omega$, a capacitor with $C_1 = 40 \text{ nF}$, and an AC voltage source with $U_0 = 20 \text{ V}$ and $f = 4 \text{ MHz}$. The current I through the resistor R_1 shall have the same absolute value of the impedance as a capacitor $C_2 = 40 \text{ nF}$ at $f_2 = 4 \text{ MHz}$.

Solution

$$\begin{aligned} R_1 &= 1.00 \text{ k}\Omega \\ R_2 &= 10.0 \text{ k}\Omega \end{aligned}$$

$$\begin{aligned} R_3 &= 10.0 \text{ k}\Omega \\ R_4 &= 10.0 \text{ k}\Omega \end{aligned}$$

A series circuit means that the current is constant on every component.

The equivalent impedance for R_1 and C_1 combined is given by

$$\begin{aligned} Z_{R_1 C_1} &= R_1 + jX_{C_1} \\ Z_{R_1 C_1} &= R_1 - j\frac{1}{\omega C_1} \end{aligned}$$

$$\begin{aligned} Z_{R_1 C_1} &= R_1 - j\frac{1}{\omega C_1} \\ Z_{R_1 C_1} &= R_1 - j\frac{1}{2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}} \end{aligned}$$

$$\begin{aligned} Z_{R_1 C_1} &= R_1 - j\frac{1}{2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}} \\ Z_{R_1 C_1} &= R_1 - j\frac{1}{2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}} \end{aligned}$$

$$\begin{aligned} Z_{R_1 C_1} &= R_1 - j\frac{1}{2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}} \\ Z_{R_1 C_1} &= R_1 - j\frac{1}{2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}} \end{aligned}$$

$$\begin{aligned} Z_{R_1 C_1} &= R_1 - j\frac{1}{2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}} \\ Z_{R_1 C_1} &= R_1 - j\frac{1}{2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}} \end{aligned}$$

$$\begin{aligned} Z_{R_1 C_1} &= R_1 - j\frac{1}{2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}} \\ Z_{R_1 C_1} &= R_1 - j\frac{1}{2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}} \end{aligned}$$

$$\begin{aligned} Z_{R_1 C_1} &= R_1 - j\frac{1}{2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}} \\ Z_{R_1 C_1} &= R_1 - j\frac{1}{2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}} \end{aligned}$$

$$\begin{aligned} Z_{R_1 C_1} &= R_1 - j\frac{1}{2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}} \\ Z_{R_1 C_1} &= R_1 - j\frac{1}{2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}} \end{aligned}$$

$$\begin{aligned} Z_{R_1 C_1} &= R_1 - j\frac{1}{2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}} \\ Z_{R_1 C_1} &= R_1 - j\frac{1}{2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}} \end{aligned}$$

$$\begin{aligned} Z_{R_1 C_1} &= R_1 - j\frac{1}{2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}} \\ Z_{R_1 C_1} &= R_1 - j\frac{1}{2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}} \end{aligned}$$

$$\begin{aligned} Z_{R_1 C_1} &= R_1 - j\frac{1}{2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}} \\ Z_{R_1 C_1} &= R_1 - j\frac{1}{2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}} \end{aligned}$$

$$\begin{aligned} Z_{R_1 C_1} &= R_1 - j\frac{1}{2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}} \\ Z_{R_1 C_1} &= R_1 - j\frac{1}{2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}} \end{aligned}$$

d

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

2. The heating element is used to heat the wire with a temperature of 180°C . The electric power dissipation (= heat flow) of $P = 40 \text{ W}$ is necessary.

Determine the current I needed to operate the heating element.

The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6} \text{ }\Omega\cdot\text{m}$.

The heating element is 3 m long and has a diameter of 3.57 mm .

Calculate the resistance R of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \& \quad A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \quad \& \quad R = \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \& \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

d

Exercise E5 Charging Capacitors

(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (without the light bulb) also takes the form of an RC circuit. The voltage across the capacitor is again $U_c(t_0) = 0 \text{ V}$ at the moment $t_0 = 0 \text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.


Solution

Hint: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

$$\Delta U = U \cdot \frac{R_2}{R_1 + R_2} = 12 \text{ V} \cdot \frac{20 \text{ } \Omega}{20 \text{ } \Omega + 792 \text{ } \Omega} = 0.299 \text{ V}$$

Solution: The internal voltage source is $\Delta U = 0.299 \text{ V}$. The internal resistance is $R_{\text{int}} = R_1 \parallel R_2 = \frac{1}{\frac{1}{20 \text{ } \Omega} + \frac{1}{792 \text{ } \Omega}} = 19.2 \text{ } \Omega$.

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .

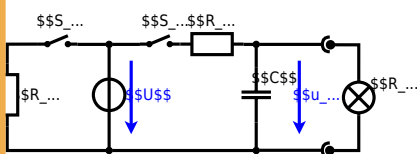


The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ } \Omega$ and a capacitor of $C = 100 \text{ } \mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first tasks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

1. First do not consider the light bulb – it is not connected to the RC circuit.

Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

Solution

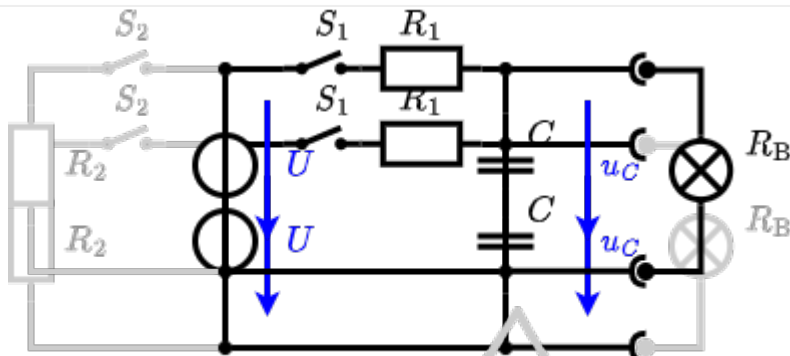


So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_C(t)$ which has to be $u_C(t_1) = 0.5 \cdot U$:

$$u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$

 It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5$

$$e^{-t/\tau} = 0.5 \quad t/\tau = \ln(0.5) \quad t = \tau \cdot \ln(0.5) \quad t = R_1 \cdot C \cdot \ln(0.5)$$

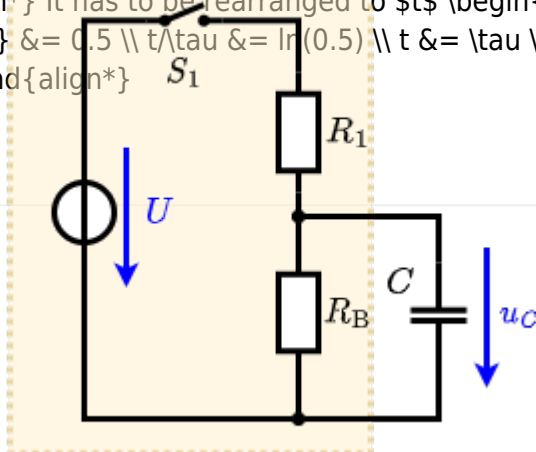

An equivalent linear voltage source can be given with U , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$ The internal resistance is given by substituting the ideal voltage source with its resistance ($= 0 \Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10 \Omega$$

$$u_C(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ ms} / (10 \Omega \cdot 100 \mu\text{F})})$$


d

Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be calculated: $R_{12} = R_1 + R_2 = 15 \Omega$ and the voltage u_{R_B} across R_B .
 Result given: u_{R_B} .

Solution

$$R_{\text{eq}} = R_1 + R_2 + R_3 + R_4 + R_5 + R_6 + R_7 + R_8 + R_9 + R_{10} + R_{11} + R_{12} + R_{13} + R_{14} + R_{15} + R_{16} + R_{17} + R_{18} + R_{19} + R_{20} + R_{21} + R_{22} + R_{23} + R_{24} + R_{25} + R_{26} + R_{27} + R_{28} + R_{29} + R_{30} + R_{31} + R_{32} + R_{33} + R_{34} + R_{35} + R_{36} + R_{37} + R_{38} + R_{39} + R_{40} + R_{41} + R_{42} + R_{43} + R_{44} + R_{45} + R_{46} + R_{47} + R_{48} + R_{49} + R_{50} + R_{51} + R_{52} + R_{53} + R_{54} + R_{55} + R_{56} + R_{57} + R_{58} + R_{59} + R_{60} + R_{61} + R_{62} + R_{63} + R_{64} + R_{65} + R_{66} + R_{67} + R_{68} + R_{69} + R_{70} + R_{71} + R_{72} + R_{73} + R_{74} + R_{75} + R_{76} + R_{77} + R_{78} + R_{79} + R_{80} + R_{81} + R_{82} + R_{83} + R_{84} + R_{85} + R_{86} + R_{87} + R_{88} + R_{89} + R_{90} + R_{91} + R_{92} + R_{93} + R_{94} + R_{95} + R_{96} + R_{97} + R_{98} + R_{99} + R_{100}$$

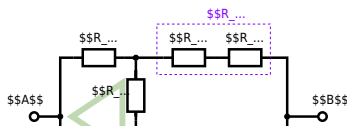

Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \, \Omega + (33.33 \, \Omega + 400 \, \Omega) \parallel (33.33 \, \Omega + 100 \, \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

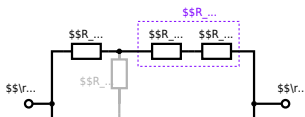

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1) \parallel (R_2 + R_2) \parallel (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel (500 \Omega + 200 \Omega) \parallel (200 \Omega + 500 \Omega)$$

$$R_{\text{eq}} = \left\{ \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega} \right\} \parallel \left\{ \frac{100 \Omega + 200 \Omega + 200 \Omega}{1} \right\} \parallel \left\{ \frac{100 \Omega + 100 \Omega}{1} \right\} \parallel \left\{ \frac{R_2 + R_2}{1} \right\} \parallel \left\{ \frac{R_2 + R_1}{1} \right\}$$

From:

<https://wiki.mexle.te.hs-heilbronn.de/> - MEXLE Wiki

Permanent link:

https://wiki.mexle.te.hs-heilbronn.de/electrical_engineering_1/ws2022_exam?rev=1680087384

Last update: **2023/03/29 12:56**

