

Exam Winter Semester 2022

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	3
Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	6
Exercise E1 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	7
Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	7
Exercise E1 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	11
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	11
Exercise E1 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022)	12
Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	13
Exercise E4 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	15
Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	19
Exercise E6 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	20
Exercise E8 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	20
Exercise E7 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	24
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	24
Exercise E5 Charging Capacitors (written test, approx. 16 % of a 60-minute written test,	


WS2022)	25
Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	26

start

Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.
Result


$$\begin{aligned} U_{\text{rs}} &= U_{\text{AB}} = 4.5 \text{ V} \\ R_{\text{i}} &= R_{\text{AB}} = 6 \Omega \end{aligned}$$

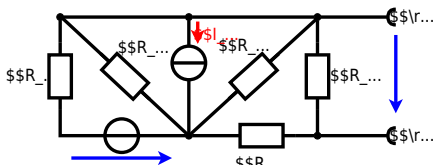


Calculate the internal resistance R_{i} and the source voltage U_{rs} of an equivalent linear voltage source on the connectors A and B .
 $R_1 = 5.0 \Omega$, $U_2 = 6.0 \text{ V}$, $R_3 = 10 \Omega$, $I_4 = 4.2 \text{ A}$, $R_5 = 10 \Omega$, $R_6 = 7.5 \Omega$, $R_7 = 15 \Omega$
 Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

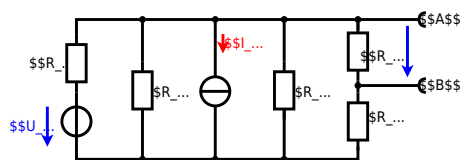

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

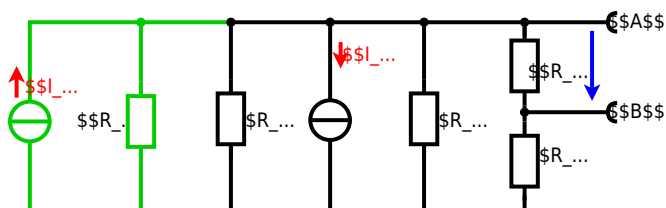

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_2}{R_1} - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{135}$$

$$\&= R_{135} \cdot I_{24} \quad \&= \left(\frac{U_2}{R_1} - I_4 \right) \cdot R_1 \parallel R_3 \parallel R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} = \left(\frac{U_2}{R_1} - I_4 \right) \cdot \frac{R_7 \cdot R_1 \parallel R_3 \parallel R_5}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0\Omega$, so a short-circuit):

$$R_{AB} = R_7 \parallel (R_6 + R_1 \parallel R_3 \parallel R_5)$$

with $R_1 \parallel R_3 \parallel R_5 = 5\Omega \parallel 10\Omega \parallel 10\Omega = 5\Omega \parallel 5\Omega = 2.5\Omega$:

$$U_{AB} = \frac{6.0\text{V}}{5.0\Omega} - 4.2\Omega \cdot \frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega} \quad R_{AB} = 15\Omega \parallel (7.5\Omega + 2.5\Omega)$$

endstart

Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. The given diagram explains the effect of temperature on the resistance of a thermistor. It has a resistance of $10\text{k}\Omega$ at 25°C and $2.5\text{k}\Omega$ at 40°C . Your answer.

Its temperature coefficients are: $\alpha = 0.01 \frac{1}{\text{K}}$ and $\beta = 71 \cdot 10^{-6} \frac{1}{\text{K}^2}$.

Result
The temperature inside the refrigeration system can reach down to -40°C .


$$R_0 = 10\text{k}\Omega \quad R_{-40} = 2.5\text{k}\Omega$$

The power of the resistor $P = U^2/R$ and $U = 20\text{V}$ is constant. Therefore, a solution is to use a higher resistance up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) \quad \text{with } \Delta T = T_{\text{end}} - T_{\text{start}} \quad R = 10\text{k}\Omega \cdot \left(1 + 0.01 \frac{1}{\text{K}} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \frac{1}{\text{K}^2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2 \right)$$

$$\begin{aligned} \text{\texttt{\textbackslash begin{align*}}} Z &= \frac{\hat{U}}{\hat{I}} \quad \text{\texttt{\textbackslash \&}} \quad \frac{\hat{I}}{\hat{U}} = \frac{\hat{U}}{Z} \quad \text{\texttt{\textbackslash \&}} \\ \text{\texttt{\textbackslash end{align*}}} \\ \text{\texttt{\textbackslash begin{align*}}} Z_C &= \frac{1}{2\pi f C} \quad \text{\texttt{\textbackslash \&}} \quad \frac{1}{2\pi \cdot 15} \\ \text{With } f &= 1500 \text{ Hz} \quad \text{\texttt{\textbackslash end{align*}}} \text{\texttt{\textbackslash begin{align*}}} I &= \\ \frac{V}{Z} &= \frac{200}{\sqrt{Z_L^2 + Z_C^2}} = \frac{200}{\sqrt{19.28^2 + 0.22^2}} \\ &= 10.4 \text{ A} \quad \text{\texttt{\textbackslash end{align*}}} \\ \text{\texttt{\textbackslash begin{align*}}} Z_C &= \frac{1}{2\pi f C} \quad \text{\texttt{\textbackslash \&}} \quad \frac{1}{2\pi \cdot 15} \\ &\sim 330 \text{ }\mu\text{H} \quad \text{\texttt{\textbackslash end{align*}}} \\ \text{\texttt{\textbackslash begin{align*}}} \underline{Z} &= R + \underline{Z}_L + \underline{Z}_C \quad \text{\texttt{\textbackslash \&}} \quad R + j \\ &\cdot Z_L - j \cdot Z_C \quad \text{\texttt{\textbackslash \&}} \quad R + j \cdot (Z_L - Z_C) \quad \text{\texttt{\textbackslash \&}} \\ &= \sqrt{R^2 + (\underline{Z}_L - \underline{Z}_C)^2} \quad \text{\texttt{\textbackslash end{align*}}} \end{aligned}$$

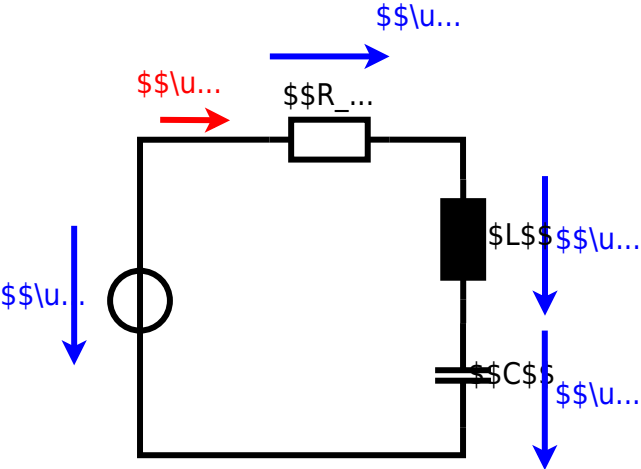

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \& \quad A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \quad \& \quad R = \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \& \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

endstart

Exercise E1 Charging Capacitors

(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (without the light bulb) also takes the form of an RC circuit. The voltage across the capacitor is again $U_c(t_0) = 0 \text{ V}$ at the moment $t_0 = 0 \text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.


Solution

Hint: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

$$\Delta U = U - \frac{R_2}{R_1 + R_2} U$$

Solution The ideal voltage source U is in series with the resistor R_1 . The voltage across the capacitor is $u_c(t) = U \cdot (1 - e^{-t/\tau})$, where $\tau = R_1 \cdot C$.

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .

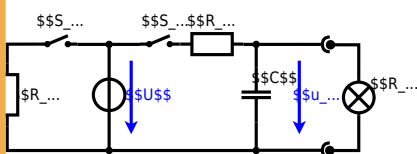


The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ } \Omega$ and a capacitor of $C = 100 \text{ } \mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first tasks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

1. First do not consider the light bulb – it is not connected to the RC circuit.

Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

Solution

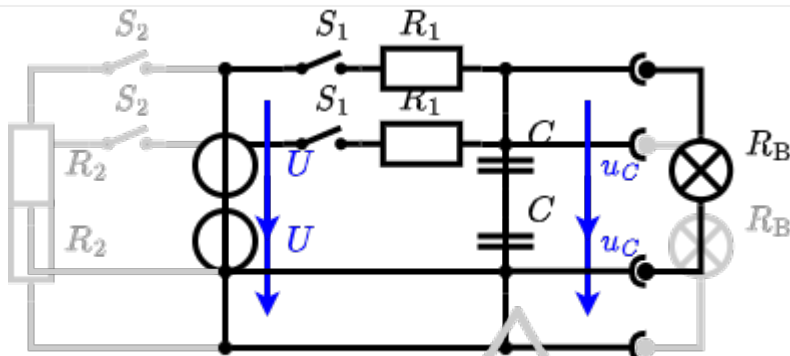

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$


The following formula describes the time course of $u_c(t)$ which has to be $u_c(t_1) = 0.5 \cdot U$:

$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$

It has to be rearranged to t :

$$(1 - e^{-t/\tau}) = 0.5 \implies e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$$

S_1

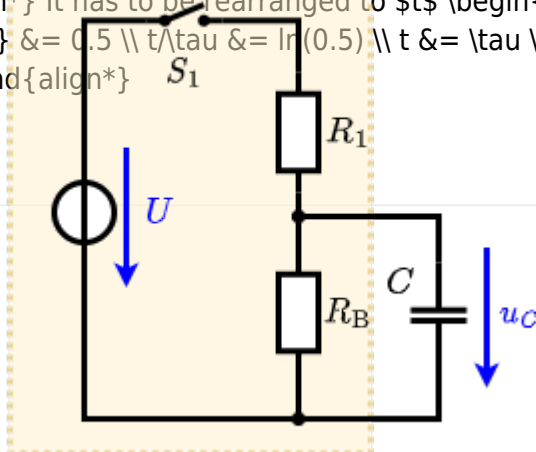

An equivalent linear voltage source can be given with U , R_1 , and R_{B} as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = 1/2 \cdot U$ The internal resistance is given by substituting the ideal voltage source with its resistance ($=0 \sim \Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10 \sim \Omega$$


$$\begin{aligned} u_c(t_2) &= U_s \cdot (1 - e^{t_2/(R_i \cdot C)}) \parallel \&= \{1\over 2\} \\ &\cdot U \cdot (1 - e^{1 \sim \rm ms / (10 \sim \Omega \cdot 100 \sim \mu F)}) \end{aligned}$$

endstart

Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall in with \$B₁ use 200 at 0 rate, the \$R₂ a R₃ = 1.00 at 0 on \$a\$ and 0.5 between \$B₁ and \$B₂.

Solution

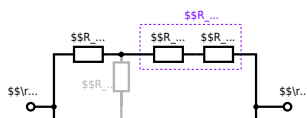

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_3) \parallel (R_2 + R_3) \parallel R_4$$

$$R_{\text{eq}} = (100 \, \Omega + 200 \, \Omega + 200 \, \Omega) \parallel (100 \, \Omega + 100 \, \Omega) \parallel R_4$$

$$R_{\text{eq}} = (500 \, \Omega) \parallel (200 \, \Omega) \parallel R_4$$

$$R_{\text{eq}} = \frac{500 \, \Omega \cdot 200 \, \Omega}{500 \, \Omega + 200 \, \Omega} \parallel R_4$$

endstart

Exercise E4 Equivalent linear Source


(written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.

Result

$$U_s = U_{AB} = 4.5 \, \text{V}$$


$$R_i = R_{AB} = 6 \, \Omega$$

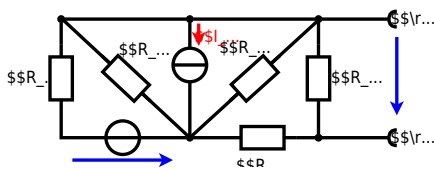


Calculate the internal resistance R_s and the source voltage U_s of an equivalent linear voltage source on the connectors A and B.
$$R_1 = 5.0 \, \Omega, \quad U_2 = 6.0 \, \text{V}, \quad R_3 = 10 \, \Omega, \quad I_4 = 4.2 \, \text{A}, \quad R_5 = 10 \, \Omega, \quad R_6 = 7.5 \, \Omega, \quad R_7 = 15 \, \Omega$$
 Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

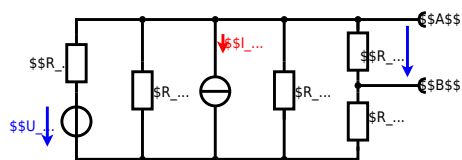

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

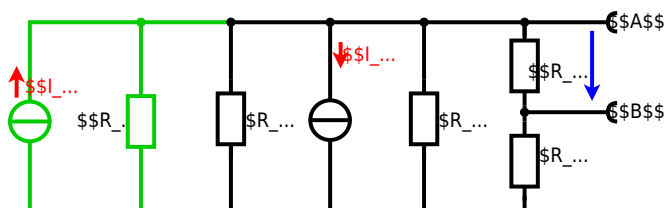

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_2}{R_1} - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{135}$$

$$I_{24} = \frac{U_{24}}{R_6 + R_7 + R_1 || R_3 || R_5} = \frac{(U_2 - I_4) \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5}$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} = (U_2 - I_4) \cdot \frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0\Omega$, so a short-circuit): $R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$

with $R_1 || R_3 || R_5 = 5\Omega || 10\Omega || 10\Omega = 5\Omega || 5\Omega = 2.5\Omega$:

$$U_{AB} = \frac{6.0V}{5.0\Omega} - 4.2\Omega \cdot \frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega} \quad R_{AB} = 15\Omega || (7.5\Omega + 2.5\Omega)$$

endstart

Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. The given diagram explains the effect of temperature on the resistance of a thermistor. The thermistor has a resistance of $10\text{ k}\Omega$ at 25°C and $2.5\text{ k}\Omega$ at 40°C . Your answer.

Its temperature coefficients are: $\alpha = 0.01 \frac{1}{\text{K}}$ and $\beta = 71 \cdot 10^{-6} \frac{1}{\text{K}^2}$

Result The temperature inside the refrigeration system can reach down to -40°C .

$$R = 6.5 \text{ k}\Omega \quad \text{at } -40^\circ\text{C}$$

The power of the resistor $P = U^2 / R$ and $U = 20\text{ V}$ is constant. Therefore, a solution is to use a higher resistance up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) \quad \text{with } \Delta T = T_{\text{end}} - T_{\text{start}} \quad R = 10 \text{ k}\Omega \cdot \left((1 + 0.01 \frac{1}{\text{K}} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \frac{1}{\text{K}^2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2) \right)$$

endstart

Exercise E6 Analyzing complex Impedances**(written test, approx. 14 % of a 60-minute written test, WS2022)**

2. Calculate the phasor voltage $\underline{U}$ across the $10 \mu\text{F}$ capacitor in the circuit shown in the figure. The current $\underline{i}$ is given by $i(t) = 0.24 \cos(300t - 4.68^\circ) \text{ A}$. Both the voltage $\underline{U}$ and the current $\underline{i}$ shall be given.

After analysis, the full low-dimensional time-dependent voltage $u(t)$ shall be extracted and be given in the form $u(t) = \hat{U} \cos(\omega t + \varphi_u)$.
Solution

1. Calculation of the physical values of the components.

Solution $\begin{aligned} R &= 10 \Omega \\ \omega &= 300 \text{ rad/s} \\ X_L &= \omega L = 2.65 \Omega \\ X_C &= \frac{1}{\omega C} = 1.05 \Omega \end{aligned}$

Solution

$$\underline{U} = \underline{U}_R + \underline{U}_L + \underline{U}_C$$

The current and voltage are in phase since the circuit is purely resistive.
resulting voltage $\underline{U} = 0.24 \angle -4.68^\circ \text{ V}$
Therefore, the component $10 \mu\text{F}$ capacitor with the same absolute value of 4.68° impedance $\underline{Z}_C = 1.05 \angle -90^\circ \Omega$ is in series with the 10Ω resistor.
$$\underline{U} = \underline{U}_R + \underline{U}_C = 0.24 \angle -4.68^\circ + 0.24 \angle -94.68^\circ$$

$$\underline{U} = 0.24 \angle -4.68^\circ + 0.24 \angle -94.68^\circ$$

The absolute value $\hat{U} = 0.24 \text{ V}$ is calculated as $\hat{U} = 0.24 \text{ V}$
The phase φ_u is calculated as $\varphi_u = \arctan\left(\frac{\text{Im}(\underline{U})}{\text{Re}(\underline{U})}\right) = \arctan\left(\frac{-4.68}{0.24}\right) = -10.9^\circ$
With the complex part comes the physical value $u(t) = 0.24 \cos(300t - 10.9^\circ) \text{ V}$
$$\underline{U} = 0.24 \angle -10.9^\circ \text{ V}$$

The phase φ_u shall be calculated as $\varphi_u = \arctan\left(\frac{\text{Im}(\underline{U})}{\text{Re}(\underline{U})}\right) = \arctan\left(\frac{-4.68}{0.24}\right) = -10.9^\circ$

endstart

Exercise E8 Complex Impedance Circuit**(written test, approx. 15 % of a 60-minute written test, WS2022)**


2. Calculate the complex impedance $\underline{Z}$ of the circuit shown in the figure. The voltage source $u(t) = 3.0 \cos(2\pi \cdot 15 t) \text{ V}$ is connected in series with an inductor of $330 \mu\text{H}$ and a capacitor of $30 \mu\text{F}$, all in series.

Solution
Solution $\underline{Z} = 19.8 \angle 48.2^\circ \Omega$

1. Draw the circuit diagram of the given circuit. Label all components, voltages, and currents.

$$\begin{aligned} \text{\texttt{\textbackslash begin{align*}}} Z &= \frac{\hat{U}}{\hat{I}} \quad \text{\texttt{\textbackslash \&}} \quad \frac{\hat{U}}{Z} = \frac{\hat{U}}{Z} \quad \text{\texttt{\textbackslash \&}} \\ \text{\texttt{\textbackslash end{align*}}} \\ \text{\texttt{\textbackslash begin{align*}}} Z_C &= \frac{1}{2\pi f C} \quad \text{\texttt{\textbackslash \&}} \quad \frac{1}{2\pi \cdot 15} \\ \text{With } f &= 1500 \text{ Hz} \quad \text{\texttt{\textbackslash end{align*}}} \text{\texttt{\textbackslash begin{align*}}} I = \\ \frac{U}{Z} &= \frac{200}{\sqrt{Z_L^2 + Z_C^2}} = \frac{200}{\sqrt{19.28^2 + 0.22^2}} \\ &= 10.4 \text{ A} \quad \text{\texttt{\textbackslash end{align*}}} \\ \text{\texttt{\textbackslash begin{align*}}} Z_C &= \frac{1}{2\pi f C} \quad \text{\texttt{\textbackslash \&}} \quad \frac{1}{2\pi \cdot 15} \\ &\sim 330 \text{ } \mu\text{H} \quad \text{\texttt{\textbackslash end{align*}}} \\ \text{\texttt{\textbackslash begin{align*}}} \underline{Z} &= R + \underline{Z}_L + \underline{Z}_C \quad \text{\texttt{\textbackslash \&}} \quad R + j \\ &\cdot Z_L - j \cdot Z_C \quad \text{\texttt{\textbackslash \&}} \quad R + j \cdot (Z_L - Z_C) \quad \text{\texttt{\textbackslash \&}} \\ &= \sqrt{R^2 + (\underline{Z}_L - \underline{Z}_C)^2} \quad \text{\texttt{\textbackslash end{align*}}} \end{aligned}$$

CS\$10..

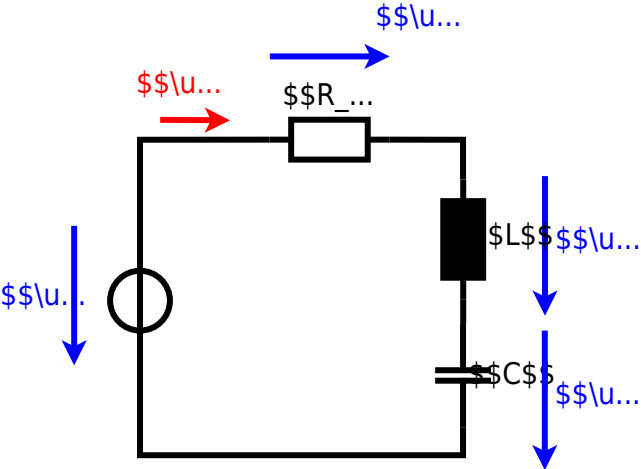

endstart

Exercise E7 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)

2. A series circuit consists of three resistors with values $R_1 = 24 \text{ k}\Omega$, $R_2 = 10 \text{ k}\Omega$, and $R_3 = 10 \text{ k}\Omega$. A voltage source of $U = 10 \text{ V}$ is connected in series with the resistors. The frequency of the voltage source is $f = 4 \text{ MHz}$. The impedance of the capacitor $C_1 = 40 \text{ nF}$ is $Z_{C_1} = 10 \text{ k}\Omega$. The impedance of the inductor $L_1 = 10 \text{ k}\Omega$ is $Z_{L_1} = 10 \text{ k}\Omega$. The impedance of the resistor R_1 shall have the same absolute value of the impedance as a capacitor $C_1 = 40 \text{ nF}$ at $f_1 = 4 \text{ MHz}$.

Solution

$$\begin{aligned} R_1 &= 100 \text{ k}\Omega \\ R_2 &= 100 \text{ k}\Omega \end{aligned}$$

$$\begin{aligned} R_3 &= 100 \text{ k}\Omega \end{aligned}$$

A series circuit means that the current is constant on every component.

The equivalent impedance for R_1 and R_2 combined is given by

$$\begin{aligned} R_{\text{parallel}} &= R_1 + R_2 \\ R_{\text{parallel}} &= 24 \text{ k}\Omega + 10 \text{ k}\Omega \\ R_{\text{parallel}} &= 34 \text{ k}\Omega \end{aligned}$$

Since R_3 is perpendicular to R_{parallel} , the resulting current of the parallel circuit is given as:

$$\begin{aligned} I_{\text{parallel}} &= \frac{U}{R_{\text{parallel}}} \\ I_{\text{parallel}} &= \frac{10 \text{ V}}{34 \text{ k}\Omega} \\ I_{\text{parallel}} &= 0.294 \text{ mA} \end{aligned}$$

$$\begin{aligned} I_{\text{parallel}} &= 0.294 \text{ mA} \\ I_{\text{parallel}} &= 0.294 \text{ mA} \end{aligned}$$

$$\begin{aligned} I_{\text{parallel}} &= 0.294 \text{ mA} \\ I_{\text{parallel}} &= 0.294 \text{ mA} \end{aligned}$$

$$\begin{aligned} I_{\text{parallel}} &= 0.294 \text{ mA} \\ I_{\text{parallel}} &= 0.294 \text{ mA} \end{aligned}$$

endstart

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

2. The heating element is used to heat the wire with a temperature of $180 \text{ }^\circ\text{C}$. The power dissipation (= heat flow) of $P = 40 \text{ W}$ is necessary.

Calculate the current I needed to operate the heating element.

The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6} \text{ }\Omega\text{m}$.

The heating element is 3 m long and has a diameter of 3.57 mm .

Calculate the resistance R of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \& \quad A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \quad \& \quad R = \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \& \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

endstart

Exercise E5 Charging Capacitors

(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (without the light bulb) also takes the form of an RC circuit. The voltage across the capacitor is again 0 V at the moment $t_0 = 0 \text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.


Solution

Hint: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

$$\Delta U = U - \frac{R_2}{R_1 + R_2} U$$

Solution The circuit is an RC circuit. The voltage across the capacitor is 0 V at the moment $t_0 = 0 \text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .

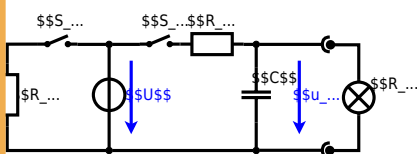


The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ } \Omega$ and a capacitor of $C = 100 \text{ } \mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first tasks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

1. First do not consider the light bulb – it is not connected to the RC circuit.

Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

Solution

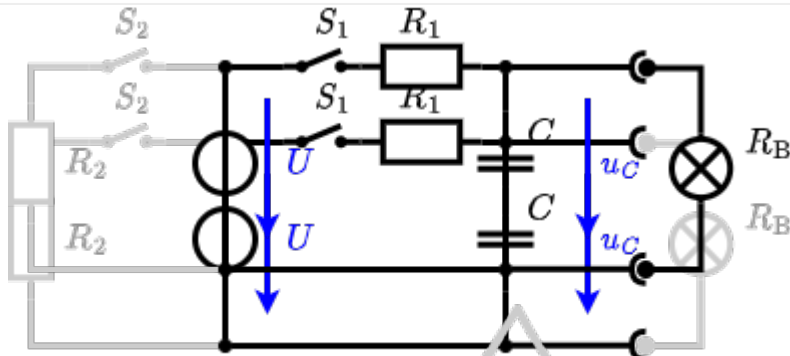

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_C(t)$ which has to be $u_c(t_1) = 0.5 \cdot U$:

$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$


It has to be rearranged to t

$$(1 - e^{-t/\tau}) = 0.5$$

$$e^{-t/\tau} = 0.5$$

$$-t/\tau = \ln(0.5)$$

$$t = \tau \cdot \ln(0.5)$$
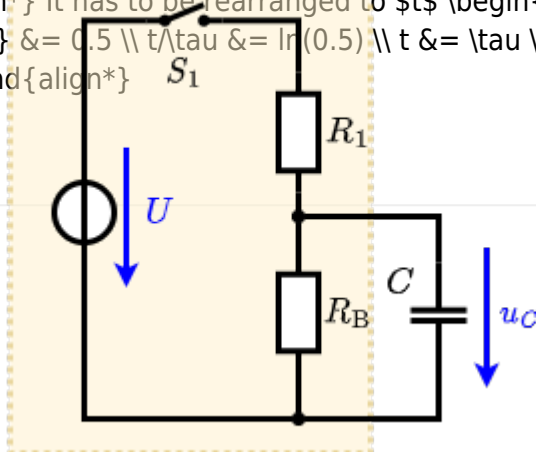
$$t = R_1 \cdot C \cdot \ln(0.5)$$


An equivalent linear voltage source can be given with U , R_1 , and R_{B} as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = 1/2 \cdot U$ The internal resistance is given by substituting the ideal voltage source with its resistance ($=0 \sim \Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10 \sim \Omega$$

$$\begin{aligned} u_c(t_2) &= U_s \cdot (1 - e^{t_2/(R_i \cdot C)}) \parallel \&= \{1\over 2\} \\ &\cdot U \cdot (1 - e^{1 \sim \rm{ms}/(10 \sim \Omega \cdot 100 \sim \rm{\mu F})}) \end{aligned}$$


endstart

Exercise E3 Pure Resistor Network Simplification

(written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall in whole be closed out at the date of the audit and the balance shall be carried over to the next fiscal year.

Solution
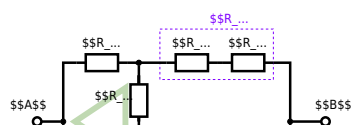
$$\Omega_{\text{reg}} = \left\{ \mathbf{a} \in \mathbb{R}^n \mid \mathbf{a}^T \mathbf{a} = 1, \mathbf{a}^T \mathbf{b} = 0 \right\}$$


Since $R_2=R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$\begin{aligned} R_Y &= \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} \\ &= \frac{(100 \sim \Omega)^2}{3 \cdot 100 \sim \Omega} \\ &= \frac{1}{3} \cdot 100 \sim \Omega = 33.33 \sim \Omega \end{aligned}$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \sim \Omega + (33.33 \sim \Omega + 400 \sim \Omega) \parallel (33.33 \sim \Omega + 100 \sim \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

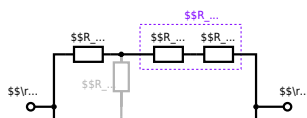

The equivalent resistor is given by a parallel configuration of resistors in series:

$$\begin{aligned} R_{\text{eq}} &= (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \sim \Omega + 200 \sim \Omega + 200 \sim \Omega) \parallel (100 \sim \Omega + 100 \sim \Omega) \parallel \\ R_{\text{eq}} &= (500 \sim \Omega) \parallel (200 \sim \Omega) \parallel R_{\text{eq}} = \{ \{ 500 \sim \Omega \cdot 200 \sim \Omega \} \over {500 \sim \Omega + 200 \sim \Omega} \} \parallel \\ \end{aligned}$$

end

From:

<https://wiki.mexle.te.hs-heilbronn.de/> - MEXLE Wiki

Permanent link:

https://wiki.mexle.te.hs-heilbronn.de/electrical_engineering_1/ws2022_exam?rev=1680091981

Last update: **2023/03/29 14:13**

