

Exam Winter Semester 2022

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	3
Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	6
Exercise E1 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	7
Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	7
Exercise E1 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	11
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	11
Exercise E1 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022)	12
Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	13
Exercise E4 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	15
Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	19
Exercise E6 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	20
Exercise E8 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	20
Exercise E7 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	24
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	24
Exercise E5 Charging Capacitors (written test, approx. 16 % of a 60-minute written test,	


WS2022)	25
Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	26

start

Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.
Result


$$\begin{aligned} U_{\text{rs}} &= U_{\text{AB}} = 4.5 \text{ V} \\ R_{\text{i}} &= R_{\text{AB}} = 6 \Omega \end{aligned}$$

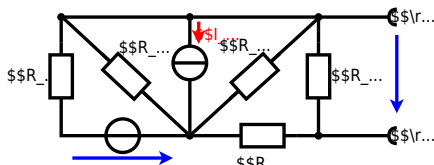


Calculate the internal resistance R_{i} and the source voltage U_{rs} of an equivalent linear voltage source on the connectors A and B .
 $R_1 = 5.0 \Omega$, $U_2 = 6.0 \text{ V}$, $R_3 = 10 \Omega$, $I_4 = 4.2 \text{ A}$, $R_5 = 10 \Omega$, $R_6 = 7.5 \Omega$, $R_7 = 15 \Omega$
 Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

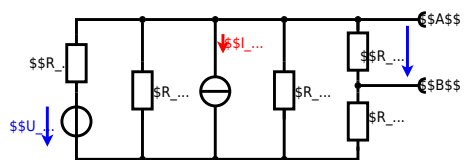

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

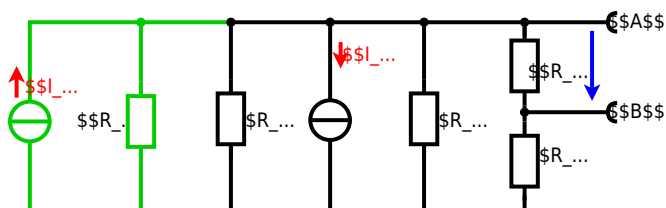

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_2}{R_1} - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{135}$$

$$\&= R_{135} \cdot I_{24} \quad \&= \left(\frac{U_2}{R_1} - I_4 \right) \cdot R_1 \parallel R_3 \parallel R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} = \left(\frac{U_2}{R_1} - I_4 \right) \cdot \frac{R_7 \cdot R_1 \parallel R_3 \parallel R_5}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0\Omega$, so a short-circuit):

$$R_{AB} = R_7 \parallel (R_6 + R_1 \parallel R_3 \parallel R_5)$$

with $R_1 \parallel R_3 \parallel R_5 = 5\Omega \parallel 10\Omega \parallel 10\Omega = 5\Omega \parallel 5\Omega = 2.5\Omega$:

$$U_{AB} = \frac{6.0\text{V}}{5.0\Omega} - 4.2\Omega \cdot \frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega} \quad R_{AB} = 15\Omega \parallel (7.5\Omega + 2.5\Omega)$$

endstart

Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. The given diagram explains a temperature sensor in a refrigeration system. The sensor has a resistance of $10\text{ k}\Omega$ at 25°C and a temperature coefficient of $\alpha = 0.01\text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6}\text{ K}^{-2}$. Your answer.

Its temperature coefficients are: $\alpha = 0.01\text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6}\text{ K}^{-2}$.

Result
The temperature inside the refrigeration system can reach down to -40°C .

$$R = 10\text{ k}\Omega \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) = 10\text{ k}\Omega \cdot (1 + 0.01 \cdot (-40 - 25) + 71 \cdot 10^{-6} \cdot (-40 - 25)^2)$$

The power of the resistor $P = U^2/R$ and $U = 20\text{V}$. Therefore, a solution is to use a higher resistance.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.


$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) \quad \text{with } \Delta T = T_{\text{end}} - T_{\text{start}} \quad R = 10\text{ k}\Omega \cdot (1 + 0.01 \cdot (-40 - 25) + 71 \cdot 10^{-6} \cdot (-40 - 25)^2)$$


```

\begin{align*} Z &= \{\frac{\hat{U}}{\hat{I}}\} \parallel \hat{I} = \{\frac{\hat{U}}{Z}\} \parallel \\
&\end{align*}
\begin{align*} Z_C &= \{\frac{1}{2\pi \cdot f \cdot C}\} \parallel &= \{\frac{1}{2\pi \cdot 15 \\
W(\text{kHz}) \cdot 10^{-3} \cdot \sqrt{2}\} \parallel &\text{and } \begin{align*} I &= \\
\begin{align*} \sqrt{Z} &= \sqrt{\frac{1}{2\pi \cdot f \cdot C}} \parallel &= \sqrt{\frac{1}{2\pi \cdot 15 \\
\cdot 10^{-3} \cdot \sqrt{2}}} \parallel &\end{align*} \\
&\end{align*}
\begin{align*} Z_C &= \{\frac{1}{2\pi \cdot f \cdot C}\} \parallel &= \{\frac{1}{2\pi \cdot 15 \\
\sim \text{kHz} \cdot 330 \sim \mu\text{H}}\} \parallel &\end{align*}
\begin{align*} \underline{Z} &= R + \underline{Z}_L + \underline{Z}_C \parallel &= R + j \\
\cdot \{Z\}_L - j \cdot \{Z\}_C \parallel &= R + j \cdot (\{Z\}_L - \{Z\}_C) \parallel |\underline{Z}| &= \\
\sqrt{R^2 + (\underline{Z}_L - \underline{Z}_C)^2} \parallel &\end{align*}

```

□ □ □ □ □ □ □ □ □ □ 10...

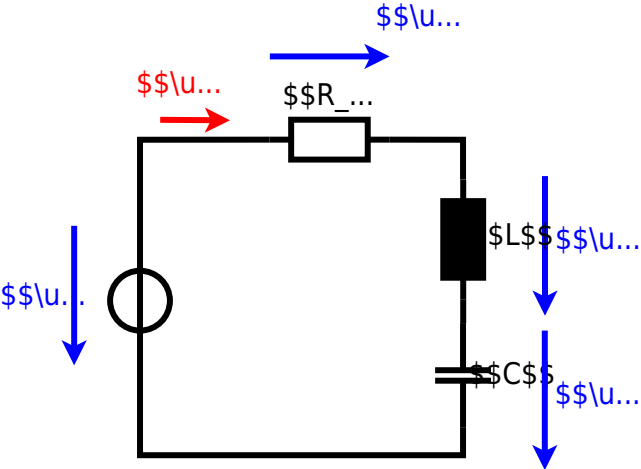

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \& \quad A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \quad \& \quad R = \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \& \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

endstart

Exercise E1 Charging Capacitors


(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (without the light bulb) also takes the form of an RC circuit. The voltage across the capacitor is again $U_c(t_0) = 0 \text{ V}$ at the moment $t_0 = 0 \text{ s}$ when the switch S_1 is closed. Calculate the voltage $U_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

Solution

Hint: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

Solution: The ideal voltage source U is in series with the resistor R_1 . The internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .

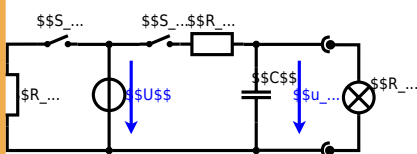


The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ } \Omega$ and a capacitor of $C = 100 \text{ } \mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first tasks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $U_c(t_0) = 0 \text{ V}$.

1. First do not consider the light bulb – it is not connected to the RC circuit. Calculate the point of time t_1 when $U_c(t_1) = 0.5 \cdot U$.

Solution

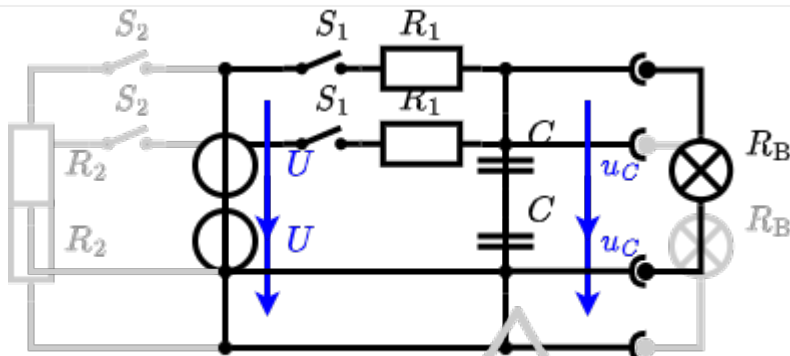

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$


The following formula describes the time course of $u_c(t)$ which has to be $u_c(t_1) = 0.5 \cdot U$:

$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$

It has to be rearranged to t :

$$(1 - e^{-t/\tau}) = 0.5 \implies e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$$

S_1

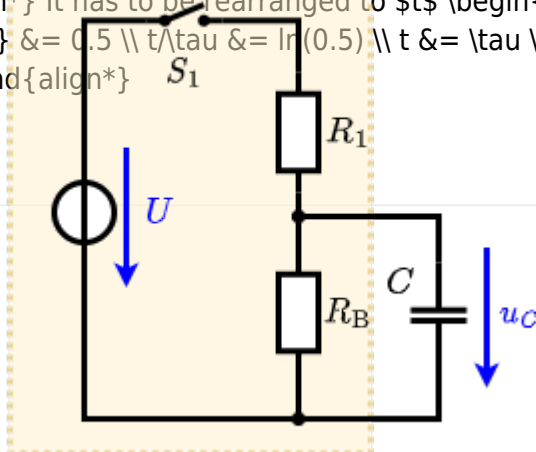

An equivalent linear voltage source can be given with U , R_1 , and R_{B} as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = 1/2 \cdot U$ The internal resistance is given by substituting the ideal voltage source with its resistance ($=0 \sim \Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10 \sim \Omega$$

$$\begin{aligned} u_c(t_2) &= U_s \cdot (1 - e^{\{t_2/(R_i \cdot C)\}}) \quad \&= \{1\over 2\} \\ &\cdot U \cdot (1 - e^{\{1 \sim \rm ms\}/(10 \sim \Omega \cdot 100 \sim \rm \mu F)\}}) \end{aligned}$$


endstart

Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall in with \$B₁ use 200 at 0 rate, the \$R₂ a R₃ = 1.00 at 0 on \$a\$ and 0.5 between \$B₁ and \$B₂.

Solution

R_{eq} is given as:

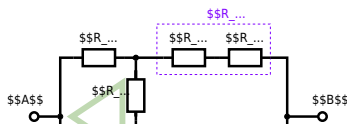

Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \, \Omega + (33.33 \, \Omega + 400 \, \Omega) \parallel (33.33 \, \Omega + 100 \, \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B.

Solution

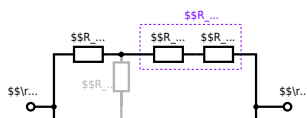

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_3) \parallel (R_2 + R_3) \parallel R_4$$

$$R_{\text{eq}} = (100 \, \Omega + 200 \, \Omega + 200 \, \Omega) \parallel (100 \, \Omega + 100 \, \Omega) \parallel R_4$$

$$R_{\text{eq}} = (500 \, \Omega) \parallel (200 \, \Omega) \parallel R_4$$

$$R_{\text{eq}} = \frac{500 \, \Omega \cdot 200 \, \Omega}{500 \, \Omega + 200 \, \Omega} \parallel R_4$$

endstart

Exercise E4 Equivalent linear Source


(written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.

Result

$$U_s = U_{AB} = 4.5 \, \text{V}$$


$$R_i = R_{AB} = 6 \, \Omega$$

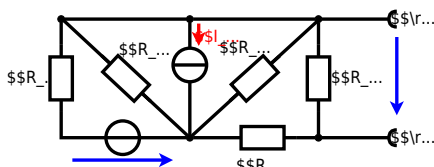


Calculate the internal resistance R_s and the source voltage U_s of an equivalent linear voltage source on the connectors A and B.
$$\begin{aligned} R_1 &= 5.0 \, \Omega, \quad U_2 = 6.0 \, \text{V}, \quad R_3 = 10 \, \Omega, \quad I_4 = 4.2 \, \text{A}, \\ R_5 &= 10 \, \Omega, \quad R_6 = 7.5 \, \Omega, \quad R_7 = 15 \, \Omega \end{aligned}$$
 Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

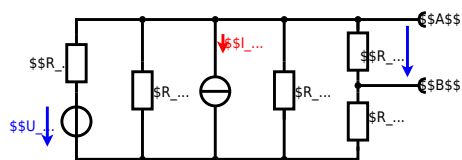

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

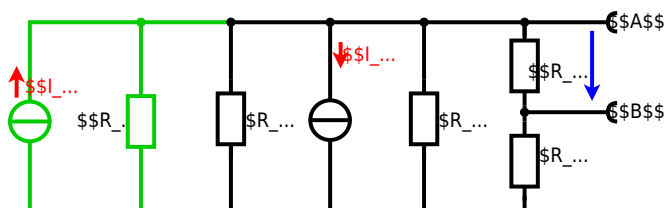

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_2}{R_1} - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{135}$$

$$I_{24} = \frac{U_{24}}{R_6 + R_7 + R_1 || R_3 || R_5} = \frac{(U_2 - I_4) \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5}$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} = (U_2 - I_4) \cdot \frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0 \Omega$, so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \Omega \cdot \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \quad R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

endstart

Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. The given diagram explains the effect of temperature on the resistance of a thermistor. The thermistor has a resistance of $10 \text{ k}\Omega$ at 25°C and $2.5 \text{ k}\Omega$ at 40°C . Your answer.

Its temperature coefficients are: $\alpha = 0.01 \frac{1}{\text{K}}$ and $\beta = 71 \cdot 10^{-6} \frac{1}{\text{K}^2}$.

Result
The temperature inside the refrigeration system can reach down to -40°C .

$$R_0 = 10 \text{ k}\Omega \quad R_{-40} = 2.5 \text{ k}\Omega$$


The power of the resistor $P = U^2 / R$ and the heat $Q = P \cdot t$. Therefore, a solution is to use a heat pump to heat up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) \quad \text{with } \Delta T = T_{\text{end}} - T_{\text{start}} \quad R = 10 \text{ k}\Omega \cdot \left((1 + 0.01 \frac{1}{\text{K}} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \frac{1}{\text{K}^2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2) \right)$$

$$\begin{aligned} \text{\texttt{\textbackslash begin{align*}}} Z &= \frac{\hat{U}}{\hat{I}} \quad \text{\texttt{\textbackslash \&}} \quad \frac{\hat{I}}{\hat{Z}} = \frac{\hat{U}}{Z} \quad \text{\texttt{\textbackslash \&}} \\ \text{\texttt{\textbackslash end{align*}}} \\ \text{\texttt{\textbackslash begin{align*}}} Z_C &= \frac{1}{2\pi f C} \quad \text{\texttt{\textbackslash \&}} \quad \frac{1}{2\pi \cdot 15} \\ \text{With } f &= 1500 \text{ Hz} \quad \text{\texttt{\textbackslash end{align*}}} \text{\texttt{\textbackslash begin{align*}}} I &= \\ \frac{U}{Z} &= \frac{200}{\sqrt{Z_L^2 + Z_C^2}} = \frac{200}{\sqrt{19.28^2 + 0.22^2}} \\ &= 10.4 \text{ A} \quad \text{\texttt{\textbackslash end{align*}}} \\ \text{\texttt{\textbackslash begin{align*}}} Z_C &= \frac{1}{2\pi f C} \quad \text{\texttt{\textbackslash \&}} \quad \frac{1}{2\pi \cdot 15} \\ &\sim 330 \text{ } \mu\text{H} \quad \text{\texttt{\textbackslash end{align*}}} \\ \text{\texttt{\textbackslash begin{align*}}} \underline{Z} &= R + \underline{Z}_L + \underline{Z}_C \quad \text{\texttt{\textbackslash \&}} \quad R + j \\ &\cdot Z_L - j \cdot Z_C \quad \text{\texttt{\textbackslash \&}} \quad R + j \cdot (Z_L - Z_C) \quad \text{\texttt{\textbackslash \&}} \\ &= \sqrt{R^2 + (Z_L - Z_C)^2} \quad \text{\texttt{\textbackslash end{align*}}} \end{aligned}$$

CS\$10...

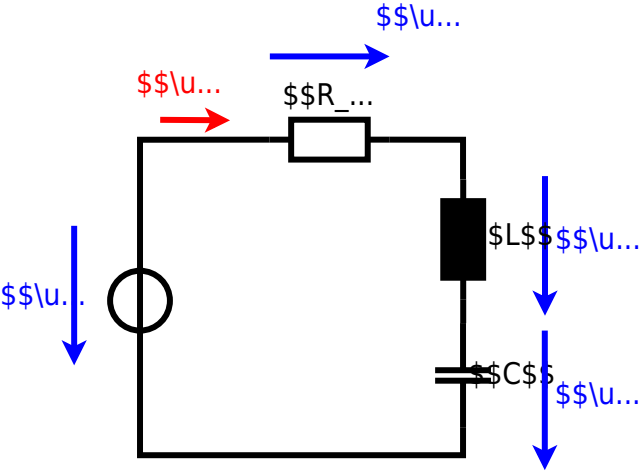

endstart

Exercise E7 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)

2. A series circuit contains three resistors with values $R_1 = 24 \text{ k}\Omega$, $R_2 = 47 \text{ k}\Omega$ and $R_3 = 10 \text{ k}\Omega$. A voltage source of $U = 230 \text{ V}$ is connected in series with the resistors. The frequency of the voltage source is $f = 50 \text{ Hz}$. A capacitor with $C = 40 \text{ nF}$ is connected in parallel with the resistors. Calculate the absolute value of the impedance of the circuit.

Solution

$$R_{\text{total}} = R_1 + R_2 + R_3 = 24 \text{ k}\Omega + 47 \text{ k}\Omega + 10 \text{ k}\Omega = 81 \text{ k}\Omega$$

$$X_C = \frac{1}{2\pi f C} = \frac{1}{2\pi \cdot 50 \text{ Hz} \cdot 40 \text{ nF}} \approx 398 \text{ }\Omega$$

A series circuit means that the current is constant on every component.

The equivalent impedance for R and X combined is given by

$$Z = \sqrt{R^2 + X^2} = \sqrt{(81 \text{ k}\Omega)^2 + (398 \text{ }\Omega)^2} \approx 81 \text{ k}\Omega$$

Therefore, the resulting current of the parallel circuit is given as:

$$I = \frac{U}{Z} = \frac{230 \text{ V}}{81 \text{ k}\Omega} \approx 2.84 \text{ mA}$$

$$I_{\text{total}} = I_{R_1} + I_{R_2} + I_{R_3} = I_{R_1} + I_{R_2} + I_{R_3}$$

$$I_{R_1} = \frac{U}{R_1} = \frac{230 \text{ V}}{24 \text{ k}\Omega} \approx 9.58 \text{ mA}$$

$$I_{R_2} = \frac{U}{R_2} = \frac{230 \text{ V}}{47 \text{ k}\Omega} \approx 4.89 \text{ mA}$$

$$I_{R_3} = \frac{U}{R_3} = \frac{230 \text{ V}}{10 \text{ k}\Omega} \approx 23 \text{ mA}$$

$$I_{\text{total}} = 9.58 \text{ mA} + 4.89 \text{ mA} + 23 \text{ mA} = 37.47 \text{ mA}$$

$$I_{\text{total}} = 37.47 \text{ mA}$$

$$I_{\text{total}} = 37.47 \text{ mA}$$

endstart

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

2. The heating element of a hair dryer is made of nichrome wire. The power dissipation (= heat flow) of $P = 40 \text{ W}$ is necessary.

Calculate the current I and the resistance R of the heating element.

The nichrome wire has a resistivity of $\rho = 1.10 \cdot 10^{-6} \text{ }\Omega \cdot \text{m}$.

The heating element is $l = 3 \text{ m}$ long and has a diameter of $d = 3.57 \text{ mm}$.

Calculate the resistance R of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \& \quad A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \quad \& \quad R = \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \& \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

endstart

Exercise E5 Charging Capacitors

(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (without the light bulb) also takes the form of an RC circuit. The voltage across the capacitor is again $U_c(t_0) = 0 \text{ V}$ at the moment $t_0 = 0 \text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

Solution


Hint: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

$$\Delta U = U - \frac{R_2}{R_1 + R_2} U$$

Solution **Part 1:** The ideal voltage source U is in series with the voltage divider $\frac{R_2}{R_1 + R_2} U$.

On an alternative view, one can try to create an equivalent linear voltage source

again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .

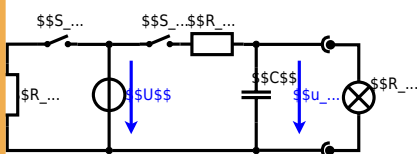


The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ } \Omega$ and a capacitor of $C = 100 \text{ } \mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first tasks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

1. First do not consider the light bulb – it is not connected to the RC circuit.

Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

Solution

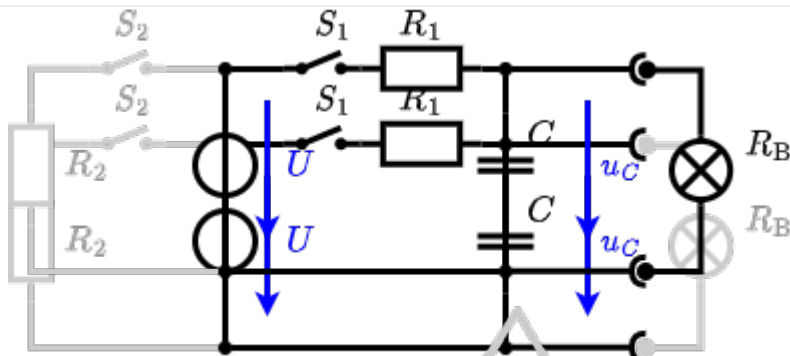

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$


The following formula describes the time course of $u_c(t)$ which has to be $u_c(t_1) = 0.5 \cdot U$:

$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$

It has to be rearranged to t :

$$(1 - e^{-t/\tau}) = 0.5 \implies e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$$

S_1

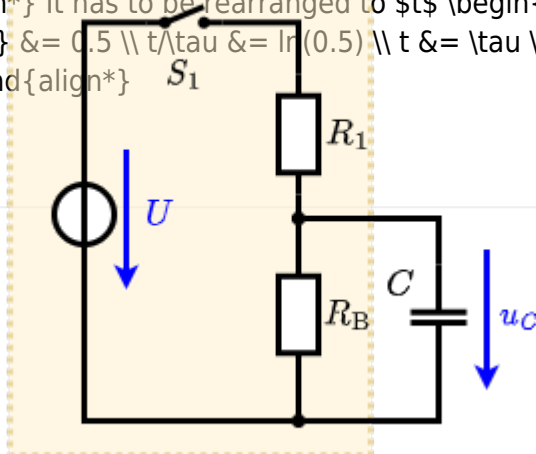

An equivalent linear voltage source can be given with U , R_1 , and R_{B} as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = 1/2 \cdot U$ The internal resistance is given by substituting the ideal voltage source with its resistance ($=0 \sim \Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10 \sim \Omega$$

$$\begin{aligned} u_c(t_2) &= U_s \cdot (1 - e^{t_2/(R_i \cdot C)}) \parallel \&= \{1\} \over {2} \\ &\cdot U \cdot (1 - e^{1 \sim \rm ms / (10 \sim \Omega \cdot 100 \sim \mu F)}) \end{aligned}$$


endstart

Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall in with \$B₁ use 200 at 0 rate, \$R₂ a R₁ = 1.00 at 0 rate, and \$B₂ between \$B₁ and \$B₂.

Solution

$R_2 = R_3 = 100 \, \Omega$

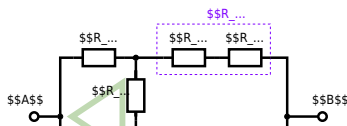

Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \, \Omega + (33.33 \, \Omega + 400 \, \Omega) \parallel (33.33 \, \Omega + 100 \, \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B.

Solution

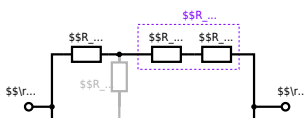

The equivalent resistor is given by a parallel configuration of resistors in series:

$$\begin{aligned} R_{\text{eq}} &= (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \\ &\sim \Omega + 200 \sim \Omega + 200 \sim \Omega) \parallel (100 \sim \Omega + 100 \sim \Omega) \parallel \\ R_{\text{eq}} &= (500 \sim \Omega) \parallel (200 \sim \Omega) \parallel R_{\text{eq}} = \{ \{ 500 \\ &\sim \Omega \cdot 200 \sim \Omega \} \over {500 \sim \Omega + 200 \sim \Omega} \} \parallel \\ \end{aligned}$$

end

From:

<https://wiki.mexle.te.hs-heilbronn.de/> - MEXLE Wiki

Permanent link:

https://wiki.mexle.te.hs-heilbronn.de/electrical_engineering_1/ws2022_exam?rev=1680092006

Last update: **2023/03/29 14:13**

