

Exam Winter Semester 2022

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents


Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	3
Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	6
Exercise E1 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	7
Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	7
Exercise E1 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	10
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	10
Exercise E1 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022)	11
Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	12
Exercise E4 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	14
Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	18
Exercise E6 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	19
Exercise E8 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	19
Exercise E7 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	22
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	22
Exercise E5 Charging Capacitors (written test, approx. 16 % of a 60-minute written test,	

WS2022)	23
Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	24

Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.
Result


$$\begin{aligned} U_{\text{S}} &= U_{\text{AB}} = 4.5 \text{ V} \\ R_{\text{i}} &= R_{\text{AB}} = 6 \text{ } \Omega \end{aligned}$$

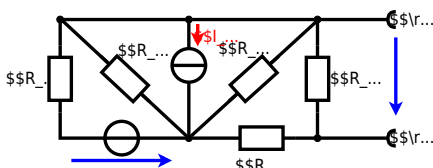


Calculated the internal resistance R_{i} and the source voltage U_{S} of an equivalent linear voltage source on the connectors A and B .
 $R_1 = 5.0 \text{ } \Omega$, $U_2 = 6.0 \text{ V}$, $R_3 = 10 \text{ } \Omega$, $I_4 = 4.2 \text{ A}$, $R_5 = 10 \text{ } \Omega$, $R_6 = 7.5 \text{ } \Omega$, $R_7 = 15 \text{ } \Omega$ Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

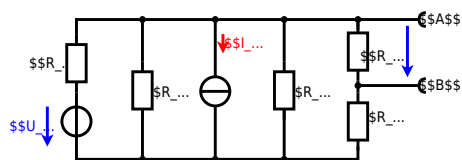

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

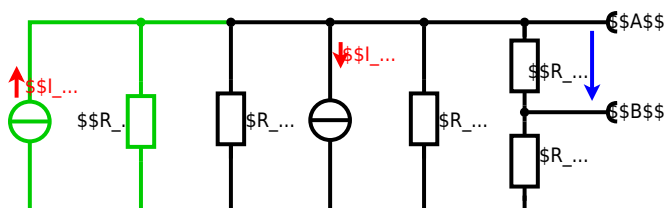

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_2}{R_1} - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{135}$$

$$I_{24} = \frac{U_{24}}{R_6 + R_1 \parallel R_3 \parallel R_5} = \frac{6.0 \text{ V}}{15 \text{ } \Omega + 2.5 \text{ } \Omega} = 0.4 \text{ A}$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} = \frac{6.0 \text{ V} \cdot 10 \text{ } \Omega}{15 \text{ } \Omega + 10 \text{ } \Omega + 2.5 \text{ } \Omega} = 2.5 \text{ V}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($\omega = 0$), so a short-circuit: $R_{AB} = R_7 \parallel (R_6 + R_1 \parallel R_3 \parallel R_5) = 10 \text{ } \Omega \parallel (15 \text{ } \Omega + 2.5 \text{ } \Omega) = 5.5 \text{ } \Omega$

with $R_1 \parallel R_3 \parallel R_5 = 2.5 \text{ } \Omega \parallel 10 \text{ } \Omega \parallel 10 \text{ } \Omega = 1.67 \text{ } \Omega$

$$U_{AB} = \frac{6.0 \text{ V}}{5.5 \text{ } \Omega} \cdot 4.2 \text{ } \Omega = 4.5 \text{ V}$$

Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. According to question 2, the effect of temperature on the resistance of the thermistor is given by the equation: $R(T) = R_0 \cdot \exp\left(\frac{A}{T - T_0}\right)$ with $R_0 = 10 \text{ k}\Omega$ and $A = 2500 \text{ K}$. The thermistor has a resistance of $6.5 \text{ k}\Omega$ at 25°C . Calculate the resistance of the thermistor at -40°C .

Its temperature coefficients are: $\alpha = 0.01 \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$.

Result

The temperature inside the refrigeration system can reach down to -40°C .


$$R = 6.5 \text{ k}\Omega \text{ at } 25^\circ\text{C}$$

The power of the heater is $P = \frac{U^2}{R}$ and the heat flow is $\dot{Q} = \frac{P}{\eta}$. Therefore, a solution is to increase the heat flow to the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) \quad | \quad \Delta T = T - T_0$$

$$R = 10 \text{ k}\Omega \cdot (1 + 0.01 \cdot (-40 - 25) + 71 \cdot 10^{-6} \cdot (-40 - 25)^2) = 10 \text{ k}\Omega \cdot 0.65 = 6.5 \text{ k}\Omega$$

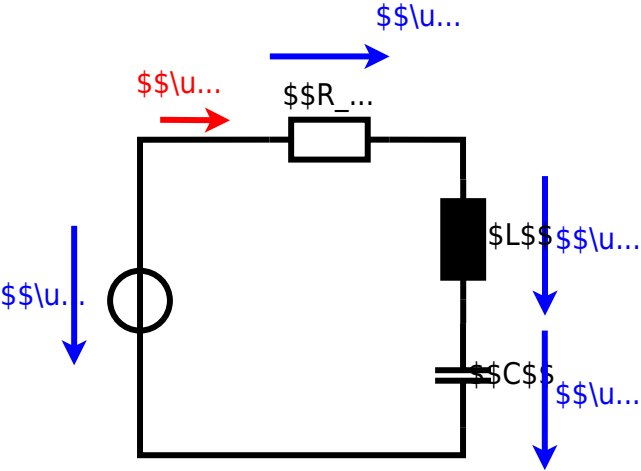

Exercise E1 Impedances at different Frequencies

(written test, approx. 18 % of a 60-minute written test, WS2022)

2. A series circuit with two resistors $R_1 = 1.00 \text{ k}\Omega$ and $R_2 = 10.0 \text{ k}\Omega$ is connected to an AC voltage source of $U = 230 \text{ V}$ at $f = 50 \text{ Hz}$. A capacitor $C = 40 \text{ nF}$ is connected in parallel with R_2 . Calculate the total impedance Z of the circuit.

Solution

$$Z = \sqrt{R_1^2 + \left(\frac{R_2}{\sqrt{1 + (\omega C R_2)^2}} \right)^2}$$

$$Z = \sqrt{1.00^2 + \left(\frac{10.0}{\sqrt{1 + (2\pi \cdot 50 \cdot 40 \cdot 10^{-9} \cdot 10.0 \cdot 10^3)^2}} \right)^2}$$

A series circuit means that the current is constant on every component.

The equivalent impedance for R_1 and R_2 combined is given by

$$Z_{\text{parallel}} = \frac{R_2}{\sqrt{1 + (\omega C R_2)^2}}$$

Parallel circuit means that the voltage is the same on R_1 and R_2 . Since C is perpendicular to R_2 , this can be simplified to

$$Z_{\text{parallel}} = \frac{R_2}{\sqrt{1 + (\omega C R_2)^2}}$$

Therefore, the resulting current of the parallel circuit is given as:

$$I_{\text{parallel}} = \frac{U}{Z_{\text{parallel}}} = \frac{U \sqrt{1 + (\omega C R_2)^2}}{R_2}$$

$$I_{\text{parallel}} = \frac{230 \text{ V} \sqrt{1 + (2\pi \cdot 50 \cdot 40 \cdot 10^{-9} \cdot 10.0 \cdot 10^3)^2}}{10.0 \cdot 10^3 \Omega}$$

$$I_{\text{parallel}} = 2.30 \text{ A} \cdot \sqrt{1 + (2\pi \cdot 50 \cdot 40 \cdot 10^{-9} \cdot 10.0 \cdot 10^3)^2} \approx 2.30 \text{ A}$$

$$I_{\text{parallel}} = 2.30 \text{ A}$$

$$I_{\text{parallel}} = 2.30 \text{ A}$$

$$I_{\text{parallel}} = 2.30 \text{ A}$$

$$I_{\text{parallel}} = 2.30 \text{ A}$$

Exercise E1 Resistance of a Wire by Resistivity

(written test, approx. 6 % of a 60-minute written test, WS2022)

2. A heating element made of nichrome wire with a diameter of $d = 0.5 \text{ mm}$ and a length of $L = 3 \text{ m}$ is connected to a power supply of $U = 230 \text{ V}$. Calculate the power dissipation P of the heating element.

Result: The power dissipation P of the heating element is $P = 40 \text{ W}$.

Calculate the current I flowing through the heating element.

The Nichrome wire has a resistivity of $\rho = 1.10 \cdot 10^{-6} \Omega \cdot \text{m}$.

The heating element is $L = 3 \text{ m}$ long and has a diameter of $d = 0.5 \text{ mm}$.

Calculate the resistance R of the heating element.

Solution

$$P = U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}}$$

$$\sqrt{\frac{P}{R}} = \sqrt{\frac{40 \cdot W}{0.33 \cdot \Omega}} \quad \text{align*}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \& \quad | \quad \text{with } A = r^2 \cdot \pi = \\ \frac{1}{4} d^2 \cdot \pi \quad \& \quad R &= \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \& \quad R = \\ 1.10 \cdot 10^{-6} \cdot \Omega \cdot \frac{4 \cdot 3 \cdot m}{(3.57 \cdot 10^{-3} \cdot m)^2 \cdot \pi} \quad \& \quad \end{aligned} \quad \text{align*}$$

Exercise E1 Charging Capacitors


(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (without the light bulb) also in the diagram of R_1 and R_2 is shown. The capacitor C is initially charged to $U_C = 20 \text{ V}$. The voltage across the capacitor is again 0 V at the moment $t_0 = 0 \text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_C(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

Solution Hint: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

Solution The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \Omega$ and a capacitor of $C = 100 \mu\text{F}$. The switch S_2 to an additional consumer R_2 will be considered to be open for the first tasks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_C(t_0) = 0 \text{ V}$.

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting S_1 .

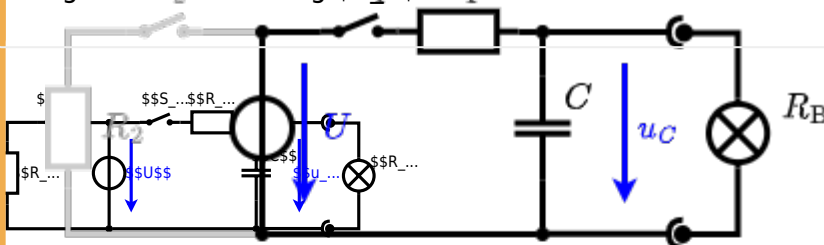


The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \Omega$ and a capacitor of $C = 100 \mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first tasks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_C(t_0) = 0 \text{ V}$.

.. First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time t_1 when $u_C(t_1) = 0.5 \cdot U$.

Solution

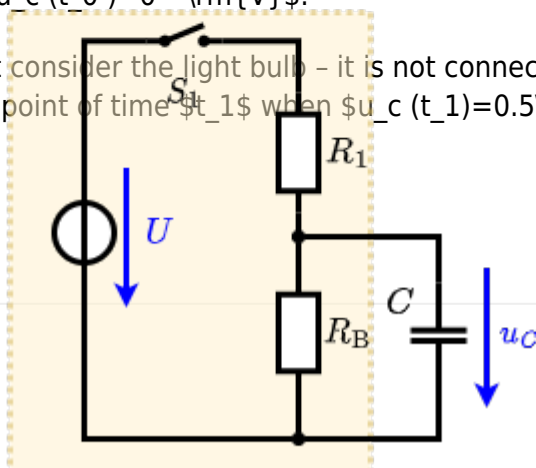

An equivalent linear voltage source can be given with U_s , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$. The internal resistance is given by substituting the ideal voltage source with its resistance ($= 0 \Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10 \Omega$$

$$u_c(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U$$

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

$$(1 - e^{-t_2/(R_1 \cdot C)}) = \frac{1}{2} \Rightarrow t_2 = R_1 \cdot C \cdot \ln(2)$$

The following formula describes the time course of $u_c(t)$ which has to be $u_c(t_1) = 0.5 \cdot U$:

$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$

It has to be rearranged to t :

$$(1 - e^{-t/\tau}) = 0.5 \Rightarrow e^{-t/\tau} = 0.5 \Rightarrow -t/\tau = \ln(0.5) \Rightarrow t = \tau \cdot \ln(2) = R_1 \cdot C \cdot \ln(2)$$


Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be simplified with $R_1 = 200 \Omega$, $R_2 = 100 \Omega$, $R_3 = 150 \Omega$, $R_4 = 100 \Omega$ and the voltage source $U = 10 \text{ V}$. Result: R_B .

Solution

$$R_{\text{eq}} = 132.8 \Omega$$

Now a wye-delta transformation is necessary.

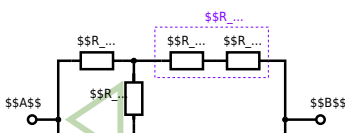

Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \, \Omega + (33.33 \, \Omega + 400 \, \Omega) \parallel (33.33 \, \Omega + 100 \, \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

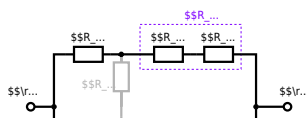

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 || R_3) || (R_4 + R_5) || R_L$$

$$R_{\text{eq}} = (100 \, \Omega + 200 \, \Omega || 200 \, \Omega) || (100 \, \Omega + 100 \, \Omega) || 500 \, \Omega$$


$$R_{\text{eq}} = \frac{(500 \, \Omega \cdot 200 \, \Omega)}{500 \, \Omega + 200 \, \Omega} || 200 \, \Omega || 200 \, \Omega$$

Exercise E4 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.
Result

$$U_s = U_{AB} = 4.5 \, \text{V}$$


$$R_i = R_{AB} = 6 \, \Omega$$

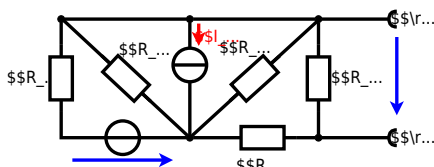


Calculate the internal resistance R_{int} and the source voltage U_s of an equivalent linear voltage source on the connectors A and B. $\begin{aligned} R_1 &= 5.0 \, \Omega, \quad U_2 = 6.0 \, \text{V}, \quad R_3 = 10 \, \Omega, \quad I_4 = 4.2 \, \text{A}, \\ R_5 &= 10 \, \Omega, \quad R_6 = 7.5 \, \Omega, \quad R_7 = 15 \, \Omega \end{aligned}$ Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

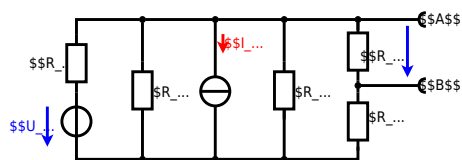

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

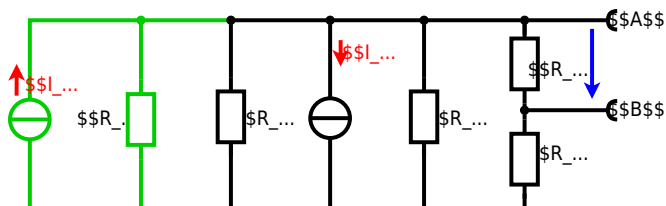

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_2}{R_1} - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{135}$$

$$U_{24} = R_{135} \cdot I_{24} = \left(\frac{U_2}{R_1} - I_4 \right) \cdot R_1 \parallel R_3 \parallel R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} = \left(\frac{U_2}{R_1} - I_4 \right) \cdot \frac{R_7 \cdot R_1 \parallel R_3 \parallel R_5}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0\Omega$, so a short-circuit):

$$R_{AB} = R_7 \parallel (R_6 + R_1 \parallel R_3 \parallel R_5)$$

with $R_1 \parallel R_3 \parallel R_5 = 5\Omega \parallel 10\Omega \parallel 10\Omega = 5\Omega \parallel 5\Omega = 2.5\Omega$:

$$U_{AB} = \frac{6.0\text{V}}{5.0\Omega} - 4.2\Omega \cdot \frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega} \quad R_{AB} = 15\Omega \parallel (7.5\Omega + 2.5\Omega)$$

Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. According to question 2, the effect of resistance on power can be identified. The resistor has a resistance of 10Ω at 25°C and a temperature coefficient of $\alpha = 0.01\text{K}^{-1}$ and $\beta = 71 \cdot 10^{-6}\text{K}^{-2}$.

Its temperature coefficients are: $\alpha = 0.01\text{K}^{-1}$ and $\beta = 71 \cdot 10^{-6}\text{K}^{-2}$.

Result


The temperature inside the refrigeration system can reach down to -40°C .

$$R = 10\Omega \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) = 10\Omega \cdot (1 + 0.01 \cdot (-40 - 25) + 71 \cdot 10^{-6} \cdot (-40 - 25)^2)$$

The power of the resistor is $P = \frac{U^2}{R}$. The power decreases as the resistance increases. Therefore, a solution is to use a resistor with a higher resistance.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) \quad | \quad \text{with } \Delta T = T_{\text{end}} - T_{\text{start}} \\ R = 10\Omega \cdot (1 + 0.01 \cdot (-40 - 25) + 71 \cdot 10^{-6} \cdot (-40 - 25)^2)$$

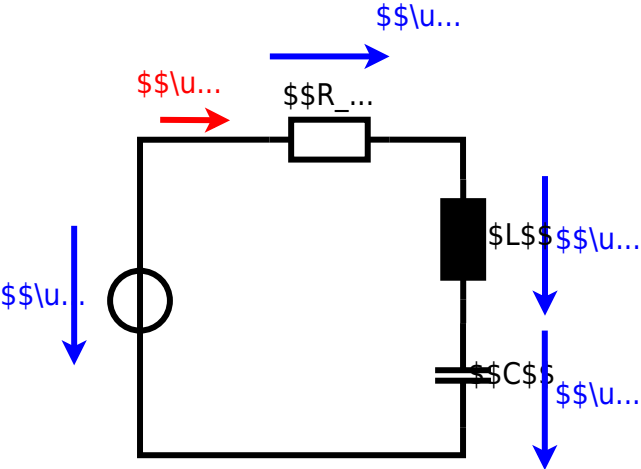

Exercise E7 Impedances at different Frequencies

(written test, approx. 18 % of a 60-minute written test, WS2022)

2. A series circuit with two resistors $R_1 = 1.00 \text{ k}\Omega$ and $R_2 = 10.0 \text{ k}\Omega$ is connected to an AC voltage source of $U = 230 \text{ V}$ at $f = 50 \text{ Hz}$. A capacitor $C = 40 \text{ nF}$ is connected in parallel with R_2 . Calculate the total impedance Z of the circuit.

Solution

$$Z = \sqrt{R_1^2 + \left(\frac{R_2}{\sqrt{1 + (\omega C R_2)^2}} \right)^2}$$

$$Z = \sqrt{1.00^2 + \left(\frac{10.0}{\sqrt{1 + (2\pi \cdot 50 \cdot 40 \cdot 10^{-9} \cdot 10.0 \cdot 10^3)^2}} \right)^2}$$

A series circuit means that the current is constant on every component.

The equivalent impedance for R_1 and R_2 combined is given by $Z = \sqrt{R_1^2 + R_2^2}$

Parallel circuit means that the voltage is the same on R_2 and C . $Z = \sqrt{R_2^2 + \left(\frac{1}{\omega C} \right)^2}$

Since $\omega C R_2 \gg 1$, the impedance of the parallel combination is approximately $Z \approx \frac{R_2}{\omega C R_2} = \frac{1}{\omega C}$

Therefore, the resulting current of the parallel circuit is given as:

$$I = \frac{U}{Z} = \frac{U}{\sqrt{R_1^2 + \left(\frac{1}{\omega C} \right)^2}}$$

Back to the first formula: $Z = \sqrt{R_1^2 + \left(\frac{R_2}{\sqrt{1 + (\omega C R_2)^2}} \right)^2}$

$$Z = \sqrt{1.00^2 + \left(\frac{10.0}{\sqrt{1 + (2\pi \cdot 50 \cdot 40 \cdot 10^{-9} \cdot 10.0 \cdot 10^3)^2}} \right)^2}$$

$$Z = \sqrt{1.00^2 + \left(\frac{10.0}{\sqrt{1 + (2\pi \cdot 50 \cdot 40 \cdot 10^{-9} \cdot 10.0 \cdot 10^3)^2}} \right)^2}$$

Exercise E1 Resistance of a Wire by Resistivity

(written test, approx. 6 % of a 60-minute written test, WS2022)

2. A heating element made of nichrome wire with a diameter of $d = 0.5 \text{ mm}$ and a length of $L = 1.0 \text{ m}$ is connected to a power supply of $U = 230 \text{ V}$. Calculate the resistance R of the heating element.

Result: The power dissipation (= heat flow) of $P = 40 \text{ W}$ is necessary.

Determine the current I needed for heating elements.

The Nichrome wire has a resistivity of $\rho = 1.10 \cdot 10^{-6} \text{ }\Omega \cdot \text{m}$.

The heating element is 3 m long and has a diameter of 3.57 mm .

∴ Calculate the resistance R of the heating element.

Solution

$$P = U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}}$$

$$\sqrt{\frac{P}{R}} = \sqrt{\frac{40 \cdot W}{0.33 \cdot \Omega}} \quad \text{align*}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \& \quad | \quad \text{with } A = r^2 \cdot \pi = \\ \frac{1}{4} d^2 \cdot \pi \quad \& \quad R &= \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \& \quad R = \\ 1.10 \cdot 10^{-6} \cdot \Omega \cdot m \cdot \frac{4 \cdot 3 \cdot m}{(3.57 \cdot 10^{-3} \cdot m)^2 \cdot \pi} \quad \& \quad \end{aligned} \quad \text{align*}$$

Exercise E5 Charging Capacitors


(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (without the light bulb) also in the diagram of R_1 and R_2 is shown. The capacitor C is initially charged to $U_C = 20 \text{ V}$. The voltage across the capacitor is again 0 V at the moment $t_0 = 0 \text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_C(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

Solution Hint: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

Solution $U_{\text{eff}} = \frac{U \cdot R_2}{R_1 + R_2} = \frac{12 \text{ V} \cdot 20 \Omega}{20 \Omega + 20 \Omega} = 6 \text{ V}$ The effective voltage source U_{eff} is independent of the choice of R_1 and R_2 .

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting S_2 .

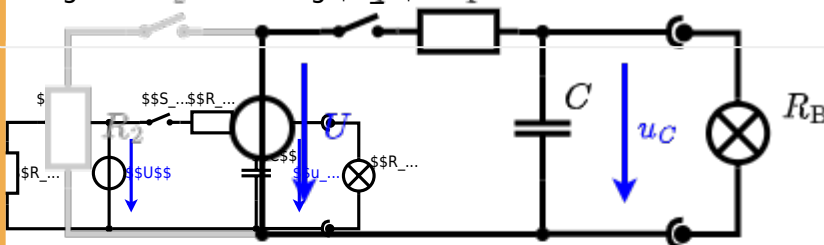


The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \Omega$ and a capacitor of $C = 100 \mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first tasks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_C(t_0) = 0 \text{ V}$.

... First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time t_1 when $u_C(t_1) = 0.5 \cdot U$.

Solution

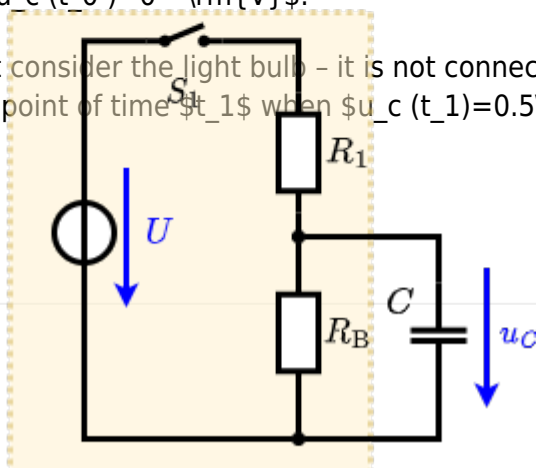

An equivalent linear voltage source can be given with U_s , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$. The internal resistance is given by substituting the ideal voltage source with its resistance ($= 0 \Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10 \Omega$$

$$u_c(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U$$

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

$$(1 - e^{-1 \text{ ms}/(10 \Omega \cdot 100 \mu\text{F})}) = 0.5$$

The following formula describes the time course of $u_c(t)$ which has to be $u_c(t_1) = 0.5 \cdot U$:

$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$

It has to be rearranged to t :

$$(1 - e^{-t/\tau}) = 0.5$$

$$e^{-t/\tau} = 0.5 \quad \ln(0.5) = -t/\tau \quad t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$$


Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved with $R_1 = 200 \Omega$, $R_2 = 100 \Omega$, $R_3 = 150 \Omega$, $R_4 = 100 \Omega$ and the voltage $U = 10 \text{ V}$.
Result given: R_B .

Solution

$$R_{\text{eq}} = 132.8 \Omega$$

Now a wye-delta transformation is necessary.

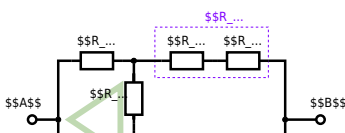

Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \, \Omega + (33.33 \, \Omega + 400 \, \Omega) \parallel (33.33 \, \Omega + 100 \, \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

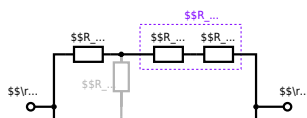

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel (100 \sim \Omega + 200 \sim \Omega + 200 \sim \Omega) \parallel (100 \sim \Omega + 100 \sim \Omega) \parallel (500 \sim \Omega) \parallel (200 \sim \Omega) \parallel R_{\text{eq}} = \left\{ \frac{500 \sim \Omega \cdot 200 \sim \Omega}{500 \sim \Omega + 200 \sim \Omega} \right\} \parallel$$

From:

<https://wiki.mexle.te.hs-heilbronn.de/> - MEXLE Wiki

Permanent link:

https://wiki.mexle.te.hs-heilbronn.de/electrical_engineering_1/ws2022_exam?rev=1680122568

Last update: **2023/03/29 22:42**

