

Exam Winter Semester 2022

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	3
Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	6
Exercise E1 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	7
Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	7
Exercise E1 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	10
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	10
Exercise E1 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022)	11
Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	12
Exercise E4 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	14
Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	18
Exercise E6 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	19
Exercise E8 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	19
Exercise E7 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	22
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	22
Exercise E5 Charging Capacitors (written test, approx. 16 % of a 60-minute written test,	


WS2022)	23
Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	24

1

Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.
Result


$$\begin{aligned} U_{\text{rs}} &= U_{\text{AB}} = 4.5 \text{ V} \\ R_{\text{i}} &= R_{\text{AB}} = 6 \Omega \end{aligned}$$

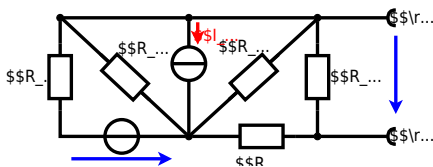


Calculated the internal resistance R_{i} and the source voltage U_{rs} of an equivalent linear voltage source on the connectors A and B .
$$\begin{aligned} R_1 &= 5.0 \Omega, \quad U_2 = 6.0 \text{ V}, \quad R_3 = 10 \Omega, \quad I_4 = 4.2 \text{ A}, \\ R_5 &= 10 \Omega, \quad R_6 = 7.5 \Omega, \quad R_7 = 15 \Omega \end{aligned}$$
 Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

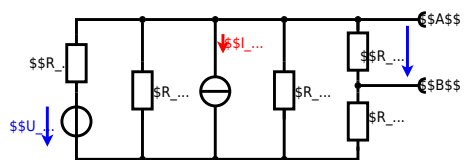

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

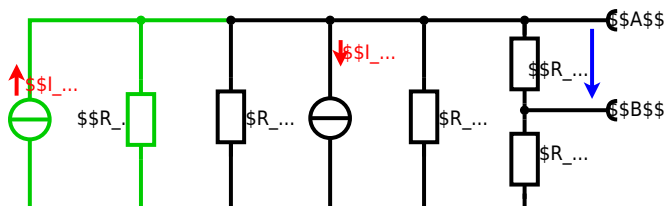

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_{12} and I_{14} :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_{12} - I_{14} = \frac{U_{24}}{R_1} - I_{14}$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{135}$$

$$U_{24} = R_{135} \cdot I_{24} \quad \&= \left(\frac{U_2}{R_1} - I_4 \right) \cdot R_1 \parallel R_3 \parallel R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between \$A\$ and \$B\$ is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} \quad \&= \left(\frac{U_2}{R_1} - I_4 \right) \cdot \frac{R_7 \cdot R_1 \parallel R_3 \parallel R_5}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0\Omega$, so a short-circuit):

$$R_{AB} = R_7 \parallel (R_6 + R_1 \parallel R_3 \parallel R_5)$$

with $R_1 \parallel R_3 \parallel R_5 = 5\Omega \parallel 10\Omega \parallel 10\Omega = 5\Omega \parallel 5\Omega = 2.5\Omega$:

$$U_{AB} = \frac{6.0\text{V}}{5.0\Omega} - 4.2\Omega \cdot \frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega} \quad R_{AB} = 15\Omega \parallel (7.5\Omega + 2.5\Omega)$$

Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. According to question 2, the effective resistance is not given, but can be identified. Result: $R_{eff} = 15\Omega$ at 25°C and 2.5Ω at 0°C for your answer.

Its temperature coefficients are: $\alpha = 0.01\text{K}^{-1}$ and $\beta = 71 \cdot 10^{-6}\text{K}^{-2}$

Result
The temperature inside the refrigeration system can reach down to -40°C .

$$R = 6.5\text{k}\Omega \text{ at } -40^\circ\text{C}$$

The power transfer is reduced by a factor of 10 and the heat flow is reduced by a factor of 10. Therefore, a solution is to use a heat exchanger to pre-heat the refrigerant.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) \quad | \quad \Delta T = T_{\text{end}} - T_{\text{start}} \\ R = 10\text{k}\Omega \cdot \left(1 + 0.01\text{K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6}\text{K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2 \right)$$

Exercise E1 Analyzing complex Impedances

(written test, approx. 14 % of a 60-minute written test, WS2022)

A. Now have the pupils exchange the $\$100$ and $\$10$ for $\$100$ and $\$10$ and have them
 Result
 components. ($\$10$ and $\$10$) shall be given.

After canonical synthesis, the full low dimensioned finite impedance head is extracted and kept (figure) in MATLAB file Zfile. The full impedance head is given by:

$$Z_{full} = \frac{1}{\Omega} \left(\frac{1}{2} \left(\frac{1}{\Omega} \right)^{2n} \left(\frac{1}{\Omega} \right)^{2m} \left(\frac{1}{\Omega} \right)^{2k} \right) + \frac{1}{\Omega} \left(\frac{1}{\Omega} \right)^{2n} \left(\frac{1}{\Omega} \right)^{2m} \left(\frac{1}{\Omega} \right)^{2k} \right)$$

Solution

.. Calculation of physical values of the two components.

$$\text{Solve} \left\{ \begin{aligned} & \text{Find} \{ \text{Roots} \{ \text{Polynomial} \{ \text{Y} \{ \text{Order} \{ 10, 67 \} \} \& \# \{ 2, 2 \} \} \} \} \} \} \end{aligned} \right\}$$

Solution

$$\frac{1}{Z} = \frac{1}{R + j\omega L} = \frac{1}{10 + j4.68} = \frac{1}{10.98 \angle 24.6^\circ} = 0.091 \angle -24.6^\circ \text{ S}$$

$$I = \frac{V}{Z} = \frac{10 \angle 0^\circ}{10.98 \angle 24.6^\circ} = 0.91 \angle -24.6^\circ \text{ A}$$

$$V_R = I R = 0.91 \angle -24.6^\circ \times 10 = 9.1 \angle -24.6^\circ \text{ V}$$

$$V_L = I j\omega L = 0.91 \angle -24.6^\circ \times j4.68 = 4.26 \angle 65.4^\circ \text{ V}$$

$$V = V_R + V_L = 9.1 \angle -24.6^\circ + 4.26 \angle 65.4^\circ = 10 \angle 0^\circ \text{ V}$$

Exercise E1 Complex Impedance Circuit

(written test, approx. 15 % of a 60-minute written test, WS2022)


[illegible]

Solution
This linear source is connected with an inductor of $330 \sim \{\rm \mu H\}$ and a capacitor of $10.22 \sim \{\rm \mu F\}$, all in series.

Result

1. Draw the circuit diagram of the given circuit. $E = 100 \angle 31.1^\circ \text{ V}$, $R = 48.2 \angle 0^\circ \Omega$, $Z = 19.8 \angle 90^\circ \Omega$.
 Label all components, voltages, and currents.

$$\begin{aligned} Z_C &= \{ \frac{1}{2\pi \cdot f \cdot C} \} \\ &= \{ \frac{1}{2\pi \cdot 15 \text{ kHz} \cdot 0.22 \text{ }\mu\text{F}} \} \end{aligned}$$
[illegible]

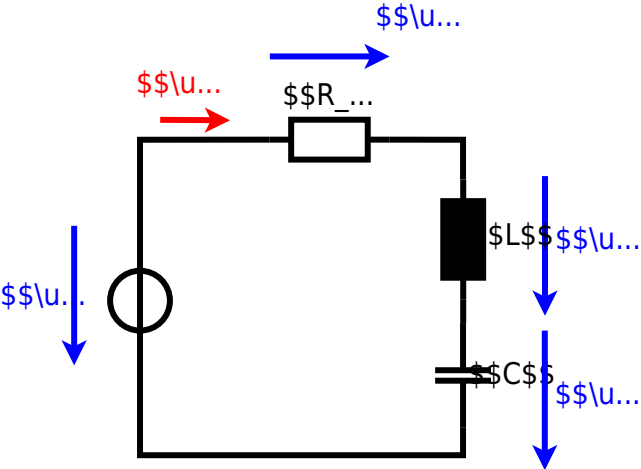

Exercise E1 Impedances at different Frequencies

(written test, approx. 18 % of a 60-minute written test, WS2022)

2. A series circuit consists of a resistor with $R_1 = 1.00 \text{ k}\Omega$ and a capacitor with $C_1 = 40 \text{ nF}$. The voltage across the resistor is $U_R = 10.0 \text{ V}$ at a frequency of $f = 4 \text{ MHz}$. Calculate the voltage across the capacitor U_C at the same frequency.

Solution

$$R_1 = 1.00 \text{ k}\Omega$$

$$C_1 = 40 \text{ nF}$$

A series circuit means that the current is constant on every component.

The equivalent impedance for R and C combined is given by

$$Z = \sqrt{R^2 + X_C^2}$$

Parallel circuit means that the voltage is the same on R and C . Since $U_R = 10.0 \text{ V}$ and $U_C = ?$, the voltage across the capacitor is $U_C = ?$.

U_C is perpendicular to U_R . (It has to, since R and C are perpendicular to each other.)

$$U^2 = U_R^2 + U_C^2 \Rightarrow U_C = \sqrt{U^2 - U_R^2}$$

Therefore, the resulting current of the parallel circuit is given as:

$$I = \frac{U}{Z} = \frac{U}{\sqrt{R^2 + X_C^2}}$$

$$I = \frac{U}{\sqrt{R^2 + \left(\frac{1}{2\pi f C}\right)^2}} = \frac{10.0 \text{ V}}{\sqrt{(1.00 \text{ k}\Omega)^2 + \left(\frac{1}{2\pi \cdot 4 \text{ MHz} \cdot 40 \text{ nF}}\right)^2}}$$

$$I = 1.96 \text{ mA}$$

Back to the first formula: $R \cdot I = X_C \cdot I$

$$R = X_C = \frac{1}{2\pi f C}$$

$$C = \frac{1}{2\pi f R}$$

$$C = \frac{1}{2\pi \cdot 4 \text{ MHz} \cdot 1.00 \text{ k}\Omega} = 3.98 \text{ nF}$$

Exercise E1 Resistance of a Wire by Resistivity

(written test, approx. 6 % of a 60-minute written test, WS2022)

2. A heating element made of nichrome wire with a diameter of $d = 0.5 \text{ mm}$ and a length of $L = 3 \text{ m}$ is used. The power dissipation (= heat flow) of $P = 40 \text{ W}$ is necessary.

Calculate the current I and the voltage U for heating elements.

The Nichrome wire has a resistivity of $\rho = 1.10 \cdot 10^{-6} \text{ }\Omega \cdot \text{m}$.

The heating element is 3 m long and has a diameter of 0.5 mm .

Calculate the resistance R of the heating element.

Solution

$$P = U \cdot I = R \cdot I^2 \Rightarrow I = \sqrt{\frac{P}{R}}$$

$$\sqrt{\frac{P}{R}} = \sqrt{\frac{40 \cdot W}{0.33 \cdot \Omega}} \quad \text{align*}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \& \quad | \quad \text{with } A = r^2 \cdot \pi = \\ \frac{1}{4} d^2 \cdot \pi \quad \& \quad R &= \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \& \quad R = \\ 1.10 \cdot 10^{-6} \cdot \Omega \cdot m \cdot \frac{4 \cdot 3 \cdot m}{(3.57 \cdot 10^{-3} \cdot m)^2 \cdot \pi} \quad \& \quad \end{aligned} \quad \text{align*}$$

Exercise E1 Charging Capacitors


(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (without the light bulb) also is the circuit of Exercise 2. The voltage across the capacitor is again 0 V at the moment $t_0 = 0 \text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

Solution Hint: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

Solution The ideal voltage source $U = 12 \text{ V}$ is in series with the resistor $R_1 = 20 \Omega$. The voltage $u_c(t)$ is independent of this series combination.

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting S_2 .

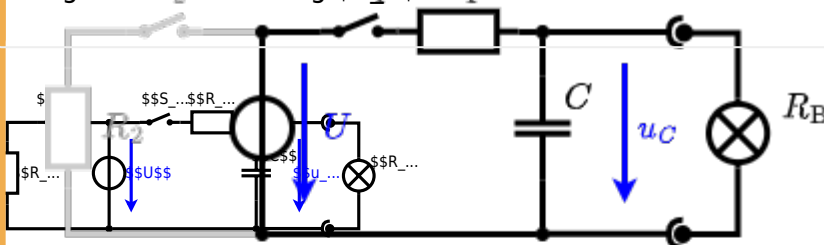


The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \Omega$ and a capacitor of $C = 100 \mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first tasks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

.. First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

Solution

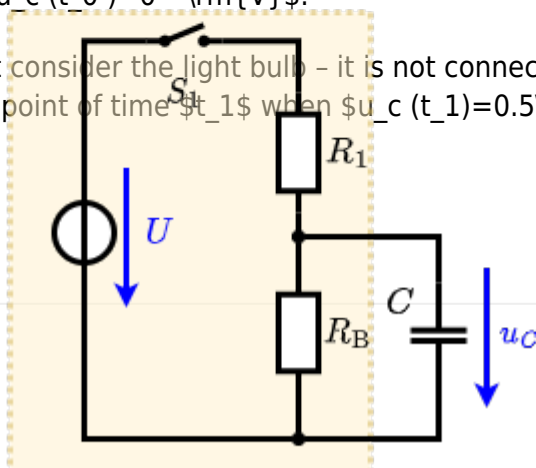

An equivalent linear voltage source can be given with U_s , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$. The internal resistance is given by substituting the ideal voltage source with its resistance ($= 0 \Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10 \Omega$$

$$u_c(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U$$

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

$$(1 - e^{-t_2/(R_1 \cdot C)}) = \frac{1}{2} \Rightarrow e^{-t_2/(R_1 \cdot C)} = \frac{1}{2} \Rightarrow -\frac{t_2}{R_1 \cdot C} = \ln\left(\frac{1}{2}\right) \Rightarrow t_2 = R_1 \cdot C \cdot \ln(2)$$

The following formula describes the time course of $u_c(t)$ which has to be $u_c(t_1) = 0.5 \cdot U$:

$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$

It has to be rearranged to t :

$$(1 - e^{-t/\tau}) = 0.5 \Rightarrow e^{-t/\tau} = 0.5 \Rightarrow -\frac{t}{\tau} = \ln(0.5) \Rightarrow t = \tau \cdot \ln(2) = R_1 \cdot C \cdot \ln(2)$$


Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be simplified with $R_1 = 200 \Omega$, $R_2 = 100 \Omega$, $R_3 = 150 \Omega$, $R_4 = 100 \Omega$ and the voltage $U = 10 \text{ V}$.
Result given: R_B .

Solution

$$R_{\text{eq}} = 132.8 \Omega$$

Now a wye-delta transformation is necessary.

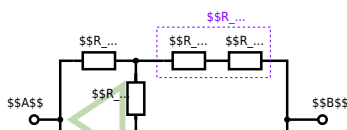

Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \, \Omega + (33.33 \, \Omega + 400 \, \Omega) \parallel (33.33 \, \Omega + 100 \, \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

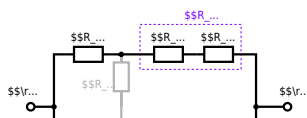

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_3) \parallel (R_2 + R_3) \parallel R_4$$

$$R_{\text{eq}} = (100 \, \Omega + 200 \, \Omega + 200 \, \Omega) \parallel (100 \, \Omega + 100 \, \Omega) \parallel R_4$$

$$R_{\text{eq}} = (500 \, \Omega) \parallel (200 \, \Omega) \parallel R_4$$


$$R_{\text{eq}} = \frac{500 \, \Omega \cdot 200 \, \Omega}{500 \, \Omega + 200 \, \Omega} \parallel R_4$$

Exercise E4 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.
Result

$$U_s = U_{AB} = 4.5 \, \text{V}$$


$$R_i = R_{AB} = 6 \, \Omega$$

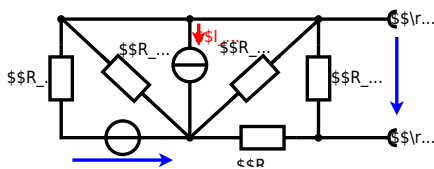


Calculate the internal resistance R_s and the source voltage U_s of an equivalent linear voltage source on the connectors A and B.
$$\begin{aligned} R_1 &= 5.0 \, \Omega, \quad U_2 = 6.0 \, \text{V}, \quad R_3 = 10 \, \Omega, \quad I_4 = 4.2 \, \text{A}, \\ R_5 &= 10 \, \Omega, \quad R_6 = 7.5 \, \Omega, \quad R_7 = 15 \, \Omega \end{aligned}$$
 Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

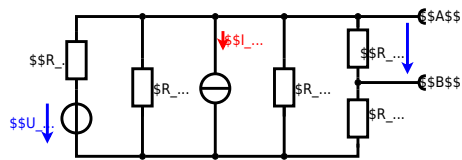

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

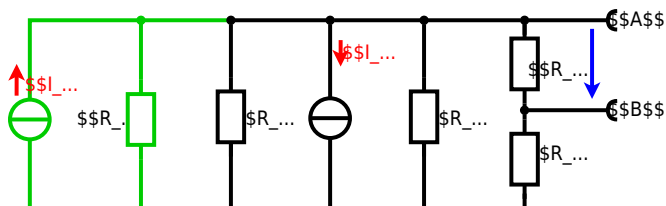

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_2}{R_1} - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{135}$$

$$U_{24} = R_{135} \cdot I_{24} \quad \&= \left(\frac{U_2}{R_1} - I_4 \right) \cdot R_1 \parallel R_3 \parallel R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} \quad \&= \left(\frac{U_2}{R_1} - I_4 \right) \cdot \frac{R_7 \cdot R_1 \parallel R_3 \parallel R_5}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0\Omega$, so a short-circuit):

$$R_{AB} = R_7 \parallel (R_6 + R_1 \parallel R_3 \parallel R_5)$$

with $R_1 \parallel R_3 \parallel R_5 = 5\Omega \parallel 10\Omega \parallel 10\Omega = 5\Omega \parallel 5\Omega = 2.5\Omega$:

$$U_{AB} = \frac{6.0\text{V}}{5.0\Omega} - 4.2\Omega \cdot \frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega} \quad R_{AB} = 15\Omega \parallel (7.5\Omega + 2.5\Omega)$$

Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. According to question 2, the effective resistance of the refrigeration system can be identified as a resistor of 6.5Ω at 25°C and 25W of power.

Its temperature coefficients are: $\alpha = 0.01\text{K}^{-1}$ and $\beta = 71 \cdot 10^{-6}\text{K}^{-2}$.

Result
The temperature inside the refrigeration system can reach down to -40°C .

$$R = 6.5\Omega \quad \text{at } T = 25^\circ\text{C}$$

The power transfer is $P = U \cdot I$ and $P = \frac{U^2}{R}$. Therefore, a solution is to let the heat flow up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) \quad | \quad \Delta T = T_{\text{end}} - T_{\text{start}} \\ R = 10\Omega \cdot \left(1 + 0.01\text{K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6}\text{K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2 \right)$$

Exercise E6 Analyzing complex Impedances

(written test, approx. 14 % of a 60-minute written test, WS2022)

A. Now have the pupils do a page test. Give them 50¢ more than they had before (\$1.33) and let them try to buy the components. (\$R\$ and \$X\$ 1\$) shall be given.

After canyons, the full low dimension for the impedance heads is extracted and kept (figure) in matrix $\mathbf{Z}$. Late the $\mathbf{Z}$ is moved to $\mathbf{Z} = \mathbf{Z} + 5 \cdot \mathbf{I}$ (where $\mathbf{I}$ is the identity matrix).

.. Calculate the physical values of the two components.

$$\text{Solution: } \begin{aligned} & \text{Rounded to } 10 \text{ places: } 10.674726 \sim 10.674726^* \\ & \text{Rounded to } 7 \text{ places: } 10.674726 \sim 10.674726^* \end{aligned}$$

Solution

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} \quad \&= \quad 50$$

The current and voltage are in phase since there is only a pure ohmic ($=$ pure real)

$$\text{resulting impedance } Z_{\text{in}} \approx \Omega \cdot 0.24$$

Therefore, the component must be capacitive with the same magnitude of 4.68

$$\text{importance} = \frac{\sum_{j=1}^n |x_j|}{\sum_{j=1}^n |x_j| + \sqrt{n}}$$

[illegible]

[illegible]

$$\text{Vring} \text{ abs}(\text{Omega} \text{ value} \& \$ \text{A} \text{ href} (0.124 \text{ - } 1) \& \$ 2 \text{ a} \text{ r} \text{ r} \text{ m} \text{ e} \text{ j} \text{ c} \text{ a} \text{ l} \text{ c} \text{ 5} \text{ f} \text{ a} \text{ t} \text{ e} \text{ d} \text{ j} \text{ a} \text{ s} \text{ r} \text{ i} \text{ p} \text{ e} \text{ t} \text{ i} \text{ n} \{ \text{Omega} \} \text{ \& } = 0.24$$

```
H\Oderiaef{I}r6=}{fcdotde68ne{Omégaver&#underlinen[Z]}X}.\\Send{{50n*}
```

$$\frac{v}{0.24 \sim \Omega + j \cdot 4.68 \sim \Omega} \approx 50$$

With the complex part comes the physical value $\begin{aligned} & \chi_{11} & \chi_{22} & \chi_{33} & \chi_{12} & \chi_{13} & \chi_{23} \end{aligned}$

$$\&= \left\{ \frac{X}{L} \right\} \over 2\pi \cdot f \} \quad \&= \left\{ \frac{4.68 \sim \Omega}{2\pi \cdot 300} \right\}$$

$$\varphi_i \text{ can be calculated as } \varphi_i = \arctan \left(\frac{y_i}{x_i} \right)$$

$$\frac{\operatorname{Im}(\gamma)}{\operatorname{Re}(\gamma)} \approx \arctan \left(\frac{-4.68 \sim \Omega}{0.24 \sim \Omega} \right)$$

Exercise E8 Complex Impedance Circuit

(written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the euro market value for Pensionize (PZ), Celanoxide (CZ) and

Problem 6.7) A particle of mass m is attached to a spring with spring constant k and a dashpot with damping coefficient c . The particle is released from rest at a distance $x(0) = x_0$ from the equilibrium position. Find the displacement $x(t)$ of the particle as a function of time t .

Solution A linear source is connected with an inductor of $330 \sim \{\rm \mu H\}$ and a capacitor of $0.22 \sim \{\rm \mu F\}$, all in series.

Result

1. Draw the circuit diagram of the given circuit. $R = 107.3 \text{ k}\Omega$, $V_{in} = 48.2 \text{ mV}$, $Z = 19.8 \text{ m}\Omega$

Label all components, voltages, and currents.

$$\begin{aligned} Z &= \{\{\hat{U}\}\over{\hat{I}}\} \parallel \hat{I} = \{\{\hat{U}\}\over{Z}\} \parallel \end{aligned}$$

$$\| \text{bedfallidion}^* \|_Z C \leq \frac{1}{2\pi \cdot f \cdot C} \leq \frac{1}{2\pi \cdot 15}$$


$$s_{\text{eff}} \backslash \text{rm kHz} \} \backslash \text{cdot} 0.22 \sim \{ \backslash \text{rm } \mu \text{F} \} \} \} \backslash \text{end} \{ \text{align}^* \}$$

$$\text{With } \{s_i\} = \{f_i\} \text{ over } \{\text{sort}[2]\} \text{ and } \text{edot}[\text{hat}[k, s_i]] = \text{begin}[\text{align}^*] \wedge \text{end}[\text{align}^*] \cdot \text{edot}[0, 2]$$

$$\frac{\sqrt{1+\sqrt{2}}}{\sqrt{2}} \cdot \frac{\sqrt{1+\sqrt{2}}}{\sqrt{2}} = \frac{1+\sqrt{2}}{2}$$

$$\frac{\sqrt{3} \Gamma(1/6) \pi^{1/4}}{2^{\sqrt{3}/2} \Gamma(2/3)} = \frac{\sqrt{3} \Gamma(1/6) \pi^{1/4}}{2^{\sqrt{3}/2} \Gamma(2/3)}$$

[illegible]

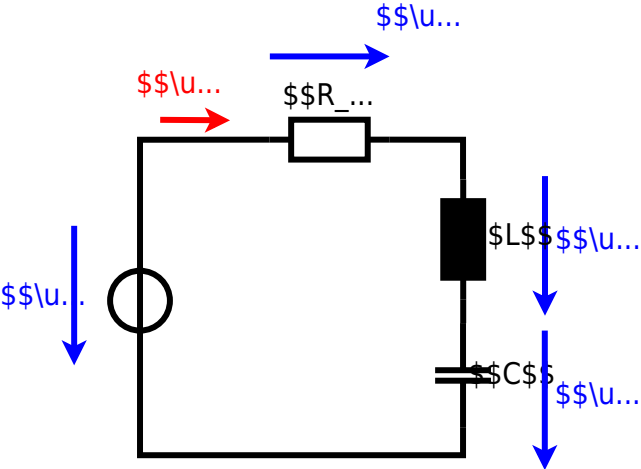

Exercise E7 Impedances at different Frequencies

(written test, approx. 18 % of a 60-minute written test, WS2022)

2. A series circuit with two resistors $R_1 = 1.00 \text{ k}\Omega$ and $R_2 = 10.0 \text{ k}\Omega$ is connected to an AC voltage source of $U = 230 \text{ V}$ at $f = 50 \text{ Hz}$. A capacitor $C = 40 \text{ nF}$ is connected in parallel with R_2 . Calculate the total impedance Z of the circuit.

Solution

$$Z = \sqrt{R_1^2 + \left(\frac{R_2}{\sqrt{1 + (\omega C R_2)^2}} \right)^2}$$

$$Z = \sqrt{1.00^2 + \left(\frac{10.0}{\sqrt{1 + (2\pi \cdot 50 \cdot 40 \cdot 10^{-9} \cdot 10.0 \cdot 10^3)^2}} \right)^2}$$

A series circuit means that the current is constant on every component.

The equivalent impedance for R_2 and C combined is given by

$$\frac{1}{Z_{R_2C}} = \frac{1}{R_2} + \frac{1}{\frac{1}{j\omega C}} \quad \Rightarrow \quad Z_{R_2C} = \frac{R_2}{1 + (\omega C R_2)^2}$$

Therefore, the resulting current of the parallel circuit is given as:

$$I = \frac{U}{Z} = \frac{U}{\sqrt{R_1^2 + \left(\frac{R_2}{\sqrt{1 + (\omega C R_2)^2}} \right)^2}}$$

Back to the first formula:

$$Z = \sqrt{R_1^2 + \left(\frac{R_2}{\sqrt{1 + (\omega C R_2)^2}} \right)^2} = \sqrt{1.00^2 + \left(\frac{10.0}{\sqrt{1 + (2\pi \cdot 50 \cdot 40 \cdot 10^{-9} \cdot 10.0 \cdot 10^3)^2}} \right)^2} = 1.00 \text{ k}\Omega$$

Exercise E1 Resistance of a Wire by Resistivity

(written test, approx. 6 % of a 60-minute written test, WS2022)

2. A heating element made of nichrome wire with a diameter of $d = 1.80 \text{ mm}$ is connected to a power supply of $U = 230 \text{ V}$. The power dissipation (= heat flow) of $P = 40 \text{ W}$ is necessary.

Calculate the current I flowing through the heating element.

The nichrome wire has a resistivity of $\rho = 1.10 \cdot 10^{-6} \text{ }\Omega \cdot \text{m}$.

The heating element is $l = 3 \text{ m}$ long and has a diameter of $d = 1.80 \text{ mm}$.

Calculate the resistance R of the heating element.

Solution

$$P = U \cdot I = R \cdot I^2 \quad \Rightarrow \quad I = \sqrt{\frac{P}{R}}$$

$$\sqrt{\frac{P}{R}} = \sqrt{\frac{40 \cdot W}{0.33 \cdot \Omega}} \quad \text{align*}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \& \quad l = r^2 \cdot \pi = \\ \frac{1}{4} d^2 \cdot \pi \quad \& \quad R &= \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \& \quad R = \\ 1.10 \cdot 10^{-6} \cdot \Omega \cdot \frac{4 \cdot 3 \cdot m}{(3.57 \cdot 10^{-3} \cdot m)^2 \cdot \pi} \quad \& \quad \end{aligned} \quad \text{align*}$$

Exercise E5 Charging Capacitors


(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (without the light bulb) also is the circuit of Exercise 2. The voltage across the capacitor is again 0 V at the moment $t_0 = 0 \text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

Solution Hint: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

Solution The ideal voltage source $U = 12 \text{ V}$ is in series with the resistor $R_1 = 20 \Omega$. The voltage $u_c(t)$ is independent of this series combination.

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting S_2 .

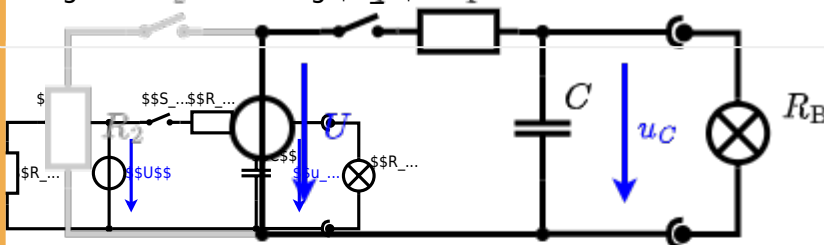


The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \Omega$ and a capacitor of $C = 100 \mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first tasks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

.. First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

Solution

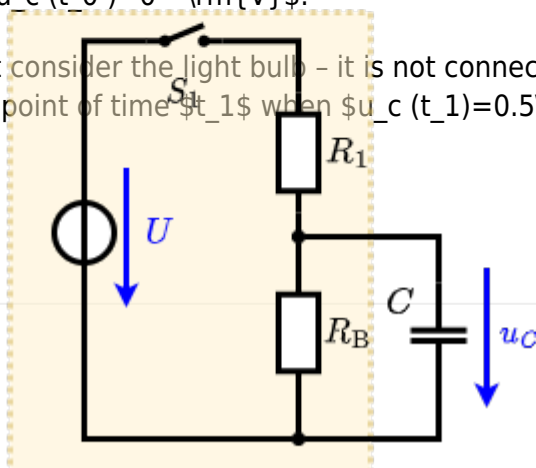

An equivalent linear voltage source can be given with U_s , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$. The internal resistance is given by substituting the ideal voltage source with its resistance ($= 0 \Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10 \Omega$$

$$u_c(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U$$

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

$$(1 - e^{-t_2/(R_1 \cdot C)}) = \frac{1}{2} \Rightarrow t_2 = R_1 \cdot C \cdot \ln(2)$$

The following formula describes the time course of $u_C(t)$ which has to be $u_C(t_1) = 0.5 \cdot U$:

$$u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$

It has to be rearranged to t :

$$(1 - e^{-t/\tau}) = 0.5 \Rightarrow e^{-t/\tau} = 0.5 \Rightarrow -t/\tau = \ln(0.5) \Rightarrow t = \tau \cdot \ln(2) = R_1 \cdot C \cdot \ln(2)$$


Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be shown with $R_1 = 200 \Omega$, $R_2 = 100 \Omega$, $R_3 = 150 \Omega$, $R_4 = 100 \Omega$ and the voltage $U = 10 \text{ V}$.
Result given: R_B .

Solution

$$R_{\text{eq}} = 132.8 \Omega$$

Now a wye-delta transformation is necessary.

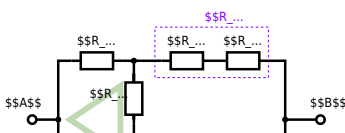

Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \, \Omega + (33.33 \, \Omega + 400 \, \Omega) \parallel (33.33 \, \Omega + 100 \, \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

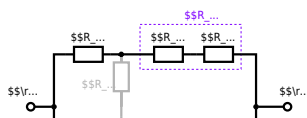

The equivalent resistor is given by a parallel configuration of resistors in series:

$$\begin{aligned} R_{\text{eq}} &= (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \\ R_{\text{eq}} &= (100 \, \Omega + 200 \, \Omega + 200 \, \Omega) \parallel (100 \, \Omega + 100 \, \Omega) \\ R_{\text{eq}} &= (500 \, \Omega) \parallel (200 \, \Omega) \\ R_{\text{eq}} &= \frac{500 \, \Omega \cdot 200 \, \Omega}{500 \, \Omega + 200 \, \Omega} \end{aligned}$$

From:

<https://wiki.mexle.te.hs-heilbronn.de/> - MEXLE Wiki

Permanent link:

https://wiki.mexle.te.hs-heilbronn.de/electrical_engineering_1/ws2022_exam?rev=1680125496

Last update: **2023/03/29 23:31**

