

Exam Winter Semester 2022

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	3
Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	6
Exercise E1 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	7
Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	7
Exercise E1 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	10
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	10
Exercise E1 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022)	11
Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	12
Exercise E4 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	14
Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	18
Exercise E6 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	19
Exercise E8 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	19
Exercise E7 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	22
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	22
Exercise E5 Charging Capacitors (written test, approx. 16 % of a 60-minute written test,	


WS2022)	23
Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	24

1

Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.
Result


$$\begin{aligned} U_{\text{rs}} &= U_{\text{AB}} = 4.5 \text{ V} \\ R_{\text{ri}} &= R_{\text{AB}} = 6 \Omega \end{aligned}$$

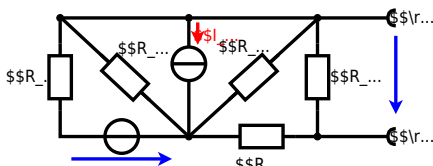


Calculated the internal resistance R_{ri} and the source voltage U_{rs} of an equivalent linear voltage source on the connectors A and B .
$$\begin{aligned} R_1 &= 5.0 \Omega, \quad U_2 = 6.0 \text{ V}, \quad R_3 = 10 \Omega, \quad I_4 = 4.2 \text{ A}, \\ R_5 &= 10 \Omega, \quad R_6 = 7.5 \Omega, \quad R_7 = 15 \Omega \end{aligned}$$
 Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

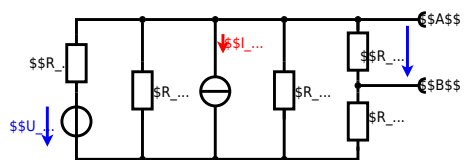

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

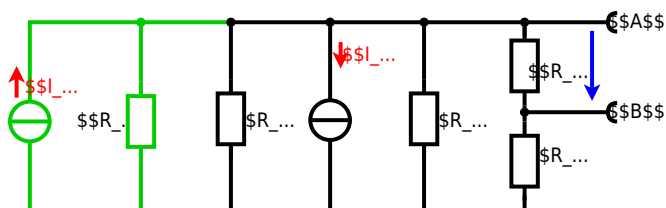

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_2}{R_1} - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{135}$$

$$U_{24} = R_{135} \cdot I_{24} \quad \&= \left(\frac{U_2}{R_1} - I_4 \right) \cdot R_1 \parallel R_3 \parallel R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between \$A\$ and \$B\$ is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} \quad \&= \left(\frac{U_2}{R_1} - I_4 \right) \cdot \frac{R_7 \cdot R_1 \parallel R_3 \parallel R_5}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0\,\Omega$, so a short-circuit):

$$R_{AB} = R_7 \parallel (R_6 + R_1 \parallel R_3 \parallel R_5)$$

with $R_1 \parallel R_3 \parallel R_5 = 5\,\Omega \parallel 10\,\Omega \parallel 10\,\Omega = 5\,\Omega \parallel 5\,\Omega = 2.5\,\Omega$:

$$U_{AB} = \frac{6.0\,\text{V}}{5.0\,\Omega} - 4.2\,\Omega \cdot \frac{15\,\Omega \cdot 2.5\,\Omega}{7.5\,\Omega + 15\,\Omega + 2.5\,\Omega} \quad \&= 15\,\Omega \parallel (7.5\,\Omega + 2.5\,\Omega)$$

Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. According to question 2, the effect of resistance on power can be identified. The resistor is a thermistor with a resistance of $R_0 = 10\,\Omega$ at $T_0 = 25^\circ\text{C}$. Its temperature coefficients are: $\alpha = 0.01\,\text{K}^{-1}$ and $\beta = 71 \cdot 10^{-6}\,\text{K}^{-2}$.

Result

The temperature inside the refrigeration system can reach down to -40°C .

$$R = 10\,\Omega \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) \quad \&= 10\,\Omega \cdot (1 + 0.01 \cdot (-40 - 25) + 71 \cdot 10^{-6} \cdot (-40 - 25)^2)$$

The power of the resistor is $P = U^2 / R$. Therefore, a solution is to heat the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) \quad \&= 10\,\Omega \cdot (1 + 0.01 \cdot (-40 - 25) + 71 \cdot 10^{-6} \cdot (-40 - 25)^2)$$

Exercise E1 Analyzing complex Impedances

(written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the complex impedance $\underline{Z}$ of the circuit shown in the figure. The components $\underline{R}$ and $\underline{X}_L$ shall be given.

After analysis, the full bi-dimensional complex impedance has been extracted and written in the following LaTeX code (to be used in the solution):

.. Calculation of the physical values of the two components.
Solution

Solution

```
\begin{align*} \underline{I} &= \frac{\underline{U}}{\underline{Z}} \quad \&= \{ \{50 \\
\text{The voltage } U &= 50 \text{ V (rms)} \text{ and the frequency } f = 50 \text{ Hz} \\
\text{resulting impedance } \underline{Z} &= \underline{R} + j\underline{X}_L = 0.24 + j4.68 \, \Omega \\
\text{Therefore, the component } \underline{X}_L &= 4.68 \, \Omega \text{ is the same as } \underline{X}_L = 2\pi f L \\
\text{impedance } \underline{X}_L &= 2\pi f L = 2\pi \cdot 50 \cdot 0.015 = 4.68 \, \Omega \\
\text{The absolute value } |\underline{Z}| &= \sqrt{0.24^2 + 4.68^2} = 4.70 \, \Omega \\
\text{The phase } \varphi &= \arctan\left(\frac{4.68}{0.24}\right) = 87.06^\circ \\
\text{With the complex part } \underline{Z} &= 0.24 + j4.68 \, \Omega \text{ and the voltage } \underline{U} = 50 \, \text{V} \\
\&= \{ \{X_L\} \over {2\pi \cdot f} \} \quad \&= \{ \{4.68 \sim \Omega\} \over {2\pi \cdot 300} \\
\text{The phase } \varphi &\text{ can be calculated as } \varphi_i = \arctan\left(\frac{\text{Im}(\underline{Z})}{\text{Re}(\underline{Z})}\right) = \arctan\left(\frac{4.68}{0.24}\right) = 87.06^\circ \end{align*}
```

Exercise E1 Complex Impedance Circuit


(written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the complex impedance $\underline{Z}$ of the circuit shown in the figure. The components $\underline{R}$ and $\underline{X}_L$ shall be given. The voltage source $u(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t)$ V is connected to a series circuit of an inductor of $330 \, \mu\text{H}$ and a capacitor of $0.22 \, \mu\text{F}$.

Solution

Result

```
\begin{align*} \underline{Z} &= \underline{R} + j\underline{X}_L - j\underline{X}_C = 19.8 \sim \Omega + j48.2 \sim \Omega - j19.8 \sim \Omega \\
\text{The complex impedance } \underline{Z} &= \underline{R} + j\underline{X}_L - j\underline{X}_C = 19.8 \sim \Omega + j48.2 \sim \Omega - j19.8 \sim \Omega \\
\text{The absolute value } |\underline{Z}| &= \sqrt{19.8^2 + (48.2 - 19.8)^2} = 52.0 \, \Omega \\
\text{The phase } \varphi &= \arctan\left(\frac{48.2 - 19.8}{19.8}\right) = 61.4^\circ \end{align*}
```

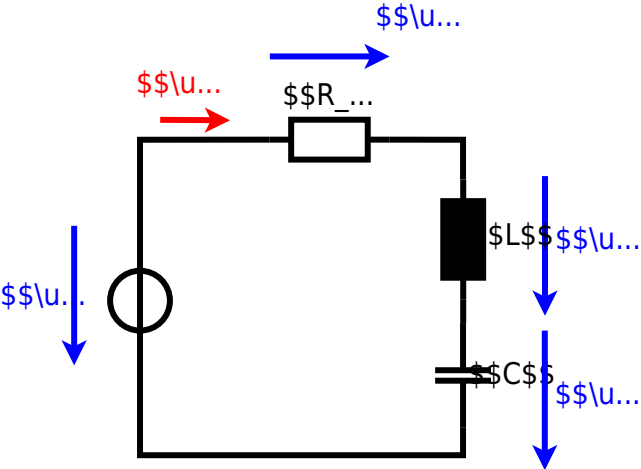Exercise E1 Impedances at different Frequencies

(written test, approx. 18 % of a 60-minute written test, WS2022)

2. A series circuit consists of a resistor with $R_1 = 1.00 \text{ k}\Omega$ and a capacitor with $C_1 = 40 \text{ nF}$. The voltage across the resistor is $U_R = 10.0 \text{ V}$ at a frequency of $f = 4 \text{ MHz}$. Calculate the voltage across the capacitor U_C and the total impedance Z of the circuit.

Solution

$$R_1 = 1.00 \text{ k}\Omega$$

$$C_1 = 40 \text{ nF}$$

A series circuit means that the current is constant on every component.

The equivalent impedance for R and C combined is given by

$$Z = \sqrt{R^2 + X_C^2}$$

Parallel circuit means that the voltage is the same on R and C . Since $U_R = 10.0 \text{ V}$ and $U_C = 10.0 \text{ V}$, the voltage across the capacitor is $U_C = 10.0 \text{ V}$.

The voltage across the capacitor is $U_C = 10.0 \text{ V}$. The voltage across the resistor is $U_R = 10.0 \text{ V}$. The voltage across the capacitor is $U_C = 10.0 \text{ V}$. The voltage across the resistor is $U_R = 10.0 \text{ V}$.

Therefore, the resulting current of the parallel circuit is given as:

$$I = I_R + I_C$$

$$I = \frac{U_R}{R} + \frac{U_C}{X_C} = \frac{10.0 \text{ V}}{1.00 \text{ k}\Omega} + \frac{10.0 \text{ V}}{X_C}$$

$$I = 10.0 \text{ mA} + \frac{10.0 \text{ V}}{X_C}$$

$$I = 10.0 \text{ mA} + \frac{10.0 \text{ V}}{X_C}$$

$$I = 10.0 \text{ mA} + \frac{10.0 \text{ V}}{X_C}$$

$$I = 10.0 \text{ mA} + \frac{10.0 \text{ V}}{X_C}$$

$$I = 10.0 \text{ mA} + \frac{10.0 \text{ V}}{X_C}$$

Exercise E1 Resistance of a Wire by Resistivity

(written test, approx. 6 % of a 60-minute written test, WS2022)

2. A heating element made of nichrome wire with a diameter of $d = 0.5 \text{ mm}$ and a length of $L = 3 \text{ m}$ is used for heating. The power dissipation (= heat flow) of $P = 40 \text{ W}$ is necessary.

Calculate the current I and the voltage U for heating elements.

The Nichrome wire has a resistivity of $\rho = 1.10 \cdot 10^{-6} \text{ }\Omega \cdot \text{m}$.

The heating element is 3 m long and has a diameter of 0.5 mm .

Calculate the resistance R of the heating element.

Solution

$$P = U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}}$$

$$\sqrt{\frac{P}{R}} = \sqrt{\frac{40 \cdot W}{0.33 \cdot \Omega}} \quad \text{align*}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \& \quad | \quad \text{with } A = r^2 \cdot \pi = \\ \frac{1}{4} d^2 \cdot \pi \quad \& \quad R &= \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \& \quad R = \\ 1.10 \cdot 10^{-6} \cdot \Omega \cdot m \cdot \frac{4 \cdot 3 \cdot m}{(3.57 \cdot 10^{-3} \cdot m)^2 \cdot \pi} \quad \& \quad \end{aligned} \quad \text{align*}$$

Exercise E1 Charging Capacitors


(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (without the light bulb) also in the diagram of R_1 and R_2 is shown. The capacitor C is initially charged to $U_C = 20 \text{ V}$. The voltage across the capacitor is again 0 V at the moment $t_0 = 0 \text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_C(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

Solution Hint: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

Solution $U_{\text{eff}} = \frac{U \cdot R_2}{R_1 + R_2} = \frac{12 \text{ V} \cdot 20 \Omega}{20 \Omega + 20 \Omega} = 6 \text{ V}$ The effective voltage source U_{eff} is independent of the choice of R_1 and R_2 .

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .

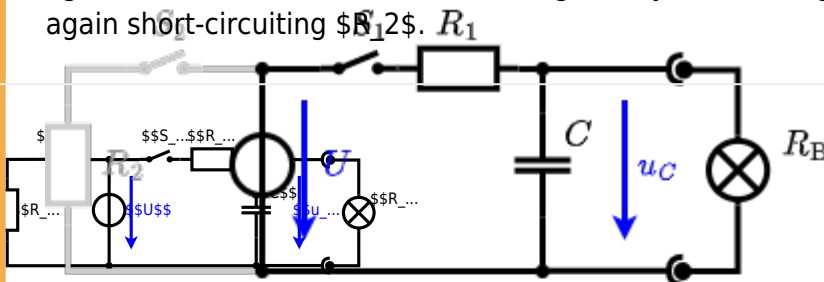


The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \Omega$ and a capacitor of $C = 100 \mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first tasks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_C(t_0) = 0 \text{ V}$.

.. First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time t_1 when $u_C(t_1) = 0.5 \cdot U$.

Solution

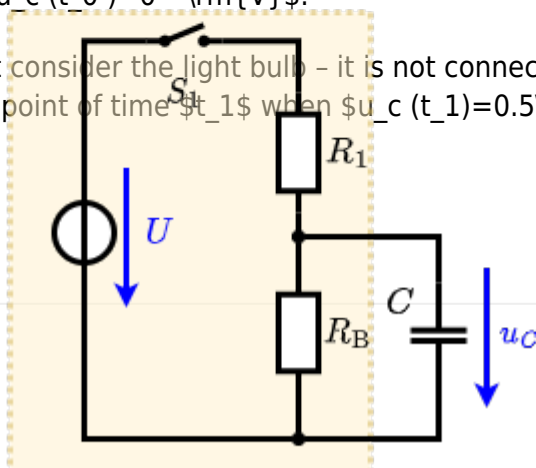

An equivalent linear voltage source can be given with U_s , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$. The internal resistance is given by substituting the ideal voltage source with its resistance ($= 0 \Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10 \Omega$$

$$u_c(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U$$

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

$$(1 - e^{-\tau/(10 \Omega \cdot 100 \mu F)}) = 0.5$$

The following formula describes the time course of $u_c(t)$ which has to be $u_c(t_1) = 0.5 \cdot U$:

$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$

It has to be rearranged to t :

$$(1 - e^{-t/\tau}) = 0.5$$

$$e^{-t/\tau} = 0.5 \quad \ln(0.5) = -t/\tau \quad t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$$


Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be shown with $R_1 = 200 \Omega$, $R_2 = 100 \Omega$, $R_3 = 150 \Omega$, $R_4 = 100 \Omega$ and the voltage $U = 10 \text{ V}$.
Result given: R_B .

Solution

$$R_{\text{eq}} = 132.8 \Omega$$

Now a wye-delta transformation is necessary.

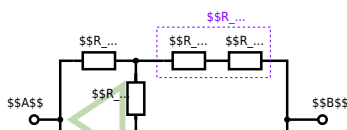

Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \, \Omega + (33.33 \, \Omega + 400 \, \Omega) \parallel (33.33 \, \Omega + 100 \, \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

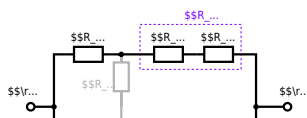

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 || R_3) || (R_4 + R_5) || R_L$$

$$R_{\text{eq}} = (100 \, \Omega + 200 \, \Omega || 200 \, \Omega) || (100 \, \Omega + 100 \, \Omega) || 500 \, \Omega$$


$$R_{\text{eq}} = \frac{(500 \, \Omega \cdot 200 \, \Omega)}{500 \, \Omega + 200 \, \Omega} || 100 \, \Omega || 200 \, \Omega$$

Exercise E4 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.
Result

$$U_s = U_{AB} = 4.5 \, \text{V}$$


$$R_i = R_{AB} = 6 \, \Omega$$

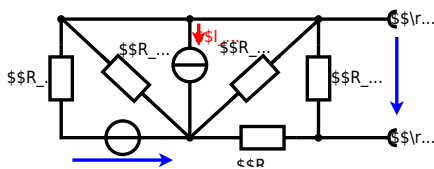


Calculate the internal resistance R_s and the source voltage U_s of an equivalent linear voltage source on the connectors A and B.
$$R_1 = 5.0 \, \Omega, \quad U_2 = 6.0 \, \text{V}, \quad R_3 = 10 \, \Omega, \quad I_4 = 4.2 \, \text{A}, \quad R_5 = 10 \, \Omega, \quad R_6 = 7.5 \, \Omega, \quad R_7 = 15 \, \Omega$$
 Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

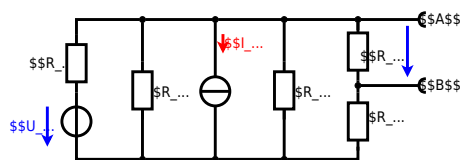

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

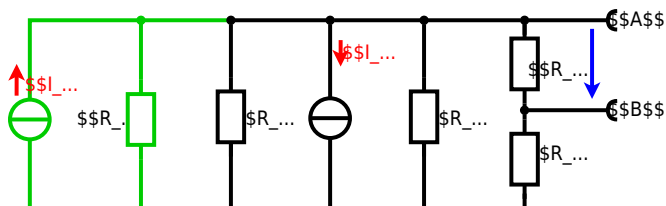

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :
$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_2}{R_1} - I_4$$
 The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:
$$U_{24}$$

$$U_{24} = R_{135} \cdot I_{24} \quad \&= \left(\frac{U_2}{R_1} - I_4 \right) \cdot R_1 \parallel R_3 \parallel R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} \quad \&= \left(\frac{U_2}{R_1} - I_4 \right) \cdot \frac{R_7 \cdot R_1 \parallel R_3 \parallel R_5}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0\Omega$, so a short-circuit):

$$R_{AB} = R_7 \parallel (R_6 + R_1 \parallel R_3 \parallel R_5)$$

with $R_1 \parallel R_3 \parallel R_5 = 5\Omega \parallel 10\Omega \parallel 10\Omega = 5\Omega \parallel 5\Omega = 2.5\Omega$:

$$U_{AB} = \frac{6.0\text{V}}{5.0\Omega} - 4.2\Omega \cdot \frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega} \quad R_{AB} = 15\Omega \parallel (7.5\Omega + 2.5\Omega)$$

Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. According to question 2, the effect of resistance on power can be identified. The resistor has a resistance of 10Ω at 25°C and a temperature coefficient of $\alpha = 0.01\text{K}^{-1}$ and $\beta = 71 \cdot 10^{-6}\text{K}^{-2}$.

Its temperature coefficients are: $\alpha = 0.01\text{K}^{-1}$ and $\beta = 71 \cdot 10^{-6}\text{K}^{-2}$.

Result

The temperature inside the refrigeration system can reach down to -40°C .

$$R = 10\Omega \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) \quad \Delta T = T_{\text{end}} - T_{\text{start}}$$

The power of the resistor is $P = \frac{U^2}{R}$. Therefore, a solution is to heat the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = 10\Omega \cdot (1 + 0.01 \cdot (-40 - 25) + 71 \cdot 10^{-6} \cdot (-40 - 25)^2)$$

Exercise E6 Analyzing complex Impedances

(written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phase angle of the solution $\underline{U} = 50 \angle 0^\circ$ V, $\underline{Z}_1 = 30 \angle 0^\circ$ Ω and $\underline{Z}_2 = 40 \angle 90^\circ$ Ω through the components. ($\$R\$$ and $\$X_L\$$) shall be given.

After analysis, the full bi-dimensional complex impedance has been extracted and denoted $\underline{Z}$ in phase form $\underline{Z} = 50 \angle 48.2^\circ$ Ω . However, $\underline{Z} = 30 + j40$ Ω is also correct and denoted $\underline{Z}$ in rectangular form.

3. Calculate the physical values of the two components.

Solution $\underline{R} = 30 \Omega$ and $\underline{X}_L = 40 \Omega$ and $\underline{L} = 253 \mu\text{H}$ and $\underline{C} = 318 \text{ nF}$

Solution

$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{50 \angle 0^\circ}{50 \angle 48.2^\circ} = 1 \angle -48.2^\circ$ A
 The voltage $\underline{U}$ is the reference voltage and the current $\underline{I}$ is the reference current. The phase angle of the current is -48.2° .
 The impedance $\underline{Z}$ is the sum of the impedances $\underline{Z}_1$ and $\underline{Z}_2$.
 $\underline{Z}_1 = 30 \angle 0^\circ = 30 + j0$ Ω
 $\underline{Z}_2 = 40 \angle 90^\circ = j40$ Ω
 $\underline{Z} = 30 + j40$ Ω
 The magnitude of $\underline{Z}$ is 50Ω and the phase angle is 48.2° .
 The physical values of the components are $R = 30 \Omega$ and $X_L = 40 \Omega$.
 The inductance L is $L = \frac{X_L}{\omega} = \frac{40}{2\pi \cdot 150} = 253 \mu\text{H}$.
 The capacitance C is $C = \frac{1}{\omega X_C} = \frac{1}{2\pi \cdot 150 \cdot 318} = 318 \text{ nF}$.

Exercise E8 Complex Impedance Circuit

(written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the complex impedance $\underline{Z}$ of the circuit shown in the figure. The voltage source $\underline{U} = 3.0 \angle 0^\circ$ V and the current source $\underline{I} = 1.0 \angle 0^\circ$ A are in series. The impedance $\underline{Z}_1 = 10 \angle 0^\circ$ Ω and $\underline{Z}_2 = 20 \angle 90^\circ$ Ω are in parallel.


Solution $\underline{Z} = 10 \angle 0^\circ$ Ω and $\underline{Z}_2 = 20 \angle 90^\circ$ Ω are in parallel. The voltage source $\underline{U} = 3.0 \angle 0^\circ$ V and the current source $\underline{I} = 1.0 \angle 0^\circ$ A are in series.

Result

3. Draw the circuit diagram of the given circuit. Label all components, voltages, and currents.

Solution $\underline{Z} = 10 \angle 0^\circ$ Ω and $\underline{Z}_2 = 20 \angle 90^\circ$ Ω are in parallel. The voltage source $\underline{U} = 3.0 \angle 0^\circ$ V and the current source $\underline{I} = 1.0 \angle 0^\circ$ A are in series.

Result $\underline{Z} = 10 \angle 0^\circ$ Ω and $\underline{Z}_2 = 20 \angle 90^\circ$ Ω are in parallel. The voltage source $\underline{U} = 3.0 \angle 0^\circ$ V and the current source $\underline{I} = 1.0 \angle 0^\circ$ A are in series.

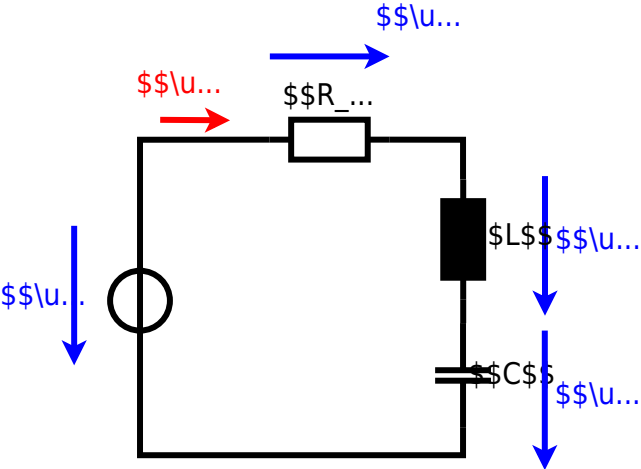

Exercise E7 Impedances at different Frequencies

(written test, approx. 18 % of a 60-minute written test, WS2022)

2. A series circuit consists of a resistor with $R_1 = 1.00 \text{ k}\Omega$ and a capacitor with $C_1 = 40 \text{ nF}$. The voltage across the resistor is $U_R = 10.0 \text{ V}$ at a frequency of $f = 4 \text{ MHz}$. Calculate the voltage across the capacitor.

Solution

$$R_1 = 1.00 \text{ k}\Omega$$

$$C_1 = 40 \text{ nF}$$

A series circuit means that the current is constant on every component.

The equivalent impedance for R and C combined is given by

$$Z = \sqrt{R^2 + X_C^2}$$

Parallel circuit means that the voltage is the same on R and C . Since $U_R = 10.0 \text{ V}$ and $U_C = 10.0 \text{ V}$, the voltage across the combination is $U = 14.14 \text{ V}$.

Since $U_R = 10.0 \text{ V}$ and $U_C = 10.0 \text{ V}$, the voltage across the combination is $U = 14.14 \text{ V}$.

Therefore, the resulting current of the parallel circuit is given as:

$$I = \frac{U}{Z} = \frac{14.14 \text{ V}}{\sqrt{1.00^2 + 10.0^2} \text{ k}\Omega} = 1.41 \text{ mA}$$

Back to the first formula: $U_C = I \cdot X_C = 1.41 \text{ mA} \cdot 10.0 \text{ k}\Omega = 14.1 \text{ V}$

Back to the first formula: $U_C = I \cdot X_C = 1.41 \text{ mA} \cdot 10.0 \text{ k}\Omega = 14.1 \text{ V}$

Back to the first formula: $U_C = I \cdot X_C = 1.41 \text{ mA} \cdot 10.0 \text{ k}\Omega = 14.1 \text{ V}$

Back to the first formula: $U_C = I \cdot X_C = 1.41 \text{ mA} \cdot 10.0 \text{ k}\Omega = 14.1 \text{ V}$

Back to the first formula: $U_C = I \cdot X_C = 1.41 \text{ mA} \cdot 10.0 \text{ k}\Omega = 14.1 \text{ V}$

Back to the first formula: $U_C = I \cdot X_C = 1.41 \text{ mA} \cdot 10.0 \text{ k}\Omega = 14.1 \text{ V}$

Exercise E1 Resistance of a Wire by Resistivity

(written test, approx. 6 % of a 60-minute written test, WS2022)

2. A heating element made of nichrome wire with a diameter of $d = 0.5 \text{ mm}$ and a length of $L = 3 \text{ m}$ is used. The power dissipation (= heat flow) of $P = 40 \text{ W}$ is necessary.

Calculate the current I and the voltage U for heating elements.

The Nichrome wire has a resistivity of $\rho = 1.10 \cdot 10^{-6} \text{ }\Omega \cdot \text{m}$.

The heating element is 3 m long and has a diameter of 0.5 mm .

Calculate the resistance R of the heating element.

Solution

$$P = U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}}$$

$$\sqrt{\frac{P}{R}} = \sqrt{\frac{40 \cdot W}{0.33 \cdot \Omega}} \quad \text{align*}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \& \quad | \quad \text{with } A = r^2 \cdot \pi = \\ &= \frac{1}{4} d^2 \cdot \pi \quad \& \quad R = \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \& \quad R = \\ &= 1.10 \cdot 10^{-6} \cdot \Omega \cdot m \cdot \frac{4 \cdot 3 \cdot m}{(3.57 \cdot 10^{-3} \cdot m)^2 \cdot \pi} \quad \& \quad \end{aligned} \quad \text{align*}$$

Exercise E5 Charging Capacitors


(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (without the light bulb) also consists of a DC voltage source $U = 12 \text{ V}$, a resistor $R_1 = 20 \text{ }\Omega$, a capacitor $C = 100 \text{ }\mu\text{F}$ and a switch S_1 . The voltage across the capacitor is again 0 V at the moment $t_0 = 0 \text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_C(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

Solution Hint: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

Solution $\Delta U = U \cdot \frac{R_2}{R_1 + R_2} = 12 \text{ V} \cdot \frac{20 \text{ }\Omega}{20 \text{ }\Omega + 20 \text{ }\Omega} = 6 \text{ V}$ The ideal voltage source $\Delta U = 6 \text{ V}$ is independent of the choice of R_1 and R_2 .

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting S_2 .

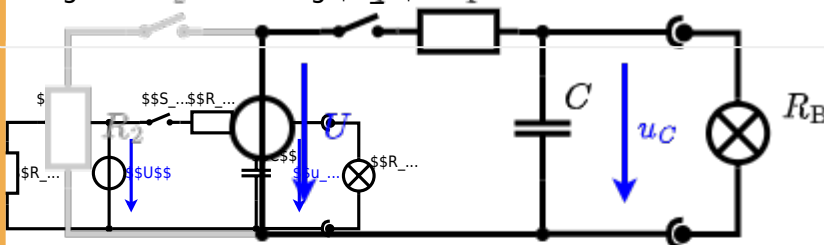


The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ }\Omega$ and a capacitor of $C = 100 \text{ }\mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first tasks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_C(t_0) = 0 \text{ V}$.

.. First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time t_1 when $u_C(t_1) = 0.5 \cdot U$.

Solution

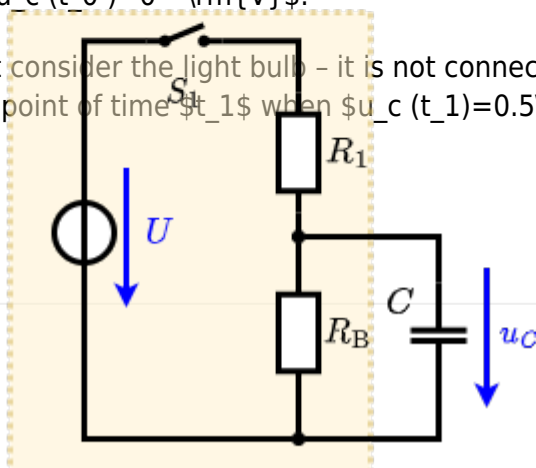

An equivalent linear voltage source can be given with U_s , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$. The internal resistance is given by substituting the ideal voltage source with its resistance ($= 0 \Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10 \Omega$$

$$u_c(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U$$

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_c(t)$ which has to be $u_c(t_1) = 0.5 \cdot U$:

$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$

It has to be rearranged to t :

$$(1 - e^{-t/\tau}) = 0.5$$

$$e^{-t/\tau} = 0.5 \quad \ln(0.5) = -t/\tau \quad t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$$


Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be shown with $R_1 = 200 \Omega$, $R_2 = 100 \Omega$, $R_3 = 150 \Omega$, $R_4 = 100 \Omega$ and the voltage $U = 10 \text{ V}$.
Result given: R_B .

Solution

$$R_{\text{eq}} = 132.8 \Omega$$

Now a wye-delta transformation is necessary.

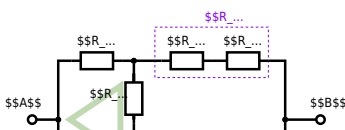

Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \, \Omega + (33.33 \, \Omega + 400 \, \Omega) \parallel (33.33 \, \Omega + 100 \, \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

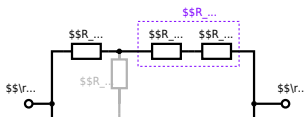

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel (100 \, \Omega + 200 \, \Omega + 200 \, \Omega) \parallel (100 \, \Omega + 100 \, \Omega) \parallel (500 \, \Omega) \parallel (200 \, \Omega) \parallel (500 \, \Omega \cdot 200 \, \Omega) \over {500 \, \Omega + 200 \, \Omega}$$

From:

<https://wiki.mexle.te.hs-heilbronn.de/> - MEXLE Wiki

Permanent link:

https://wiki.mexle.te.hs-heilbronn.de/electrical_engineering_1/ws2022_exam?rev=1680241301

Last update: **2023/03/31 07:41**

