

Exam Winter Semester 2022

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	3
Exercise E4 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	6
Exercise E1 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	10
Exercise E6 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	11
Exercise E1 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	11
Exercise E7 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	12
Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	13
Exercise E8 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	16
Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	19
Exercise E1 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022)	20
Exercise E5 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022)	21
Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	23
Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	23
Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	24
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute	


written test, WS2022)	25
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute	
written test, WS2022)	26

1

Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.
Result


$$\begin{aligned} U_{\text{rs}} &= U_{\text{AB}} = 4.5 \text{ V} \\ R_{\text{i}} &= R_{\text{AB}} = 6 \Omega \end{aligned}$$

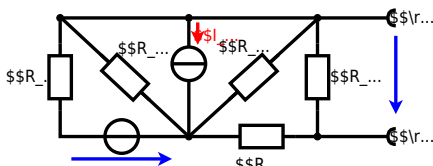


Calculated the internal resistance R_{i} and the source voltage U_{rs} of an equivalent linear voltage source on the connectors A and B .
$$\begin{aligned} R_1 &= 5.0 \Omega, \quad U_2 = 6.0 \text{ V}, \quad R_3 = 10 \Omega, \quad I_4 = 4.2 \text{ A}, \\ R_5 &= 10 \Omega, \quad R_6 = 7.5 \Omega, \quad R_7 = 15 \Omega \end{aligned}$$
 Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

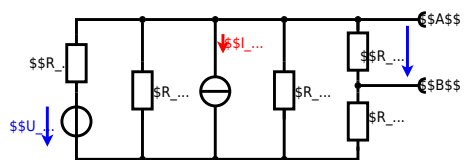

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

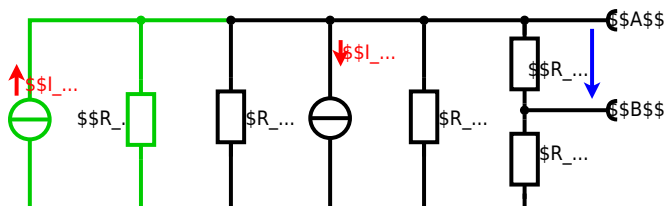

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :
$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_2}{R_1} - I_4$$
 The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:
$$U_{24}$$

$$U_{24} = U_{23} \cdot \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} = (U_2 - U_4) \cdot \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5}$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} = (U_2 - U_4) \cdot \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($= 0 \Omega$, so a short-circuit):

$$R_{AB} = R_7 \parallel (R_6 + R_1 \parallel R_3 \parallel R_5)$$


with $R_1 \parallel R_3 \parallel R_5 = 5 \Omega \parallel 10 \Omega \parallel 10 \Omega = 5 \Omega \parallel 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \Omega \cdot \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \quad R_{AB} = 15 \Omega \parallel (7.5 \Omega + 2.5 \Omega)$$

Exercise E4 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.
Result


$$U_s = U_{AB} = 4.5 \text{ V} \quad R_i = R_{AB} = 6 \Omega$$

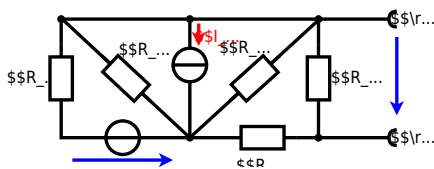


Calculate the internal resistance R_i and the source voltage U_s of an equivalent linear voltage source on the connectors A and B. $\begin{aligned} R_1 &= 5.0 \, \Omega, \quad U_2 = 6.0 \, \text{V}, \quad R_3 = 10 \, \Omega, \quad I_4 = 4.2 \, \text{A}, \\ R_5 &= 10 \, \Omega, \quad R_6 = 7.5 \, \Omega, \quad R_7 = 15 \, \Omega \end{aligned}$ Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

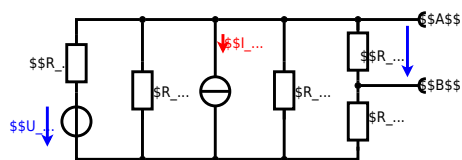

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

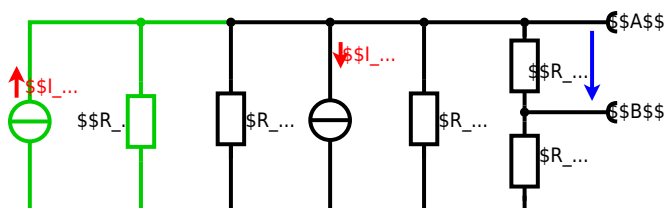

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_2}{R_1} - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{135}$$

$$\&= R_{135} \cdot I_{24} \quad \&= \left(\frac{U_2}{R_1} - I_4 \right) \cdot R_1 \parallel R_3 \parallel R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} = \left(\frac{U_2}{R_1} - I_4 \right) \cdot \frac{R_7 \cdot R_1 \parallel R_3 \parallel R_5}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0\Omega$, so a short-circuit):

$$R_{AB} = R_7 \parallel (R_6 + R_1 \parallel R_3 \parallel R_5)$$

with $R_1 \parallel R_3 \parallel R_5 = 5\Omega \parallel 10\Omega \parallel 10\Omega = 5\Omega \parallel 5\Omega = 2.5\Omega$:

$$U_{AB} = \frac{6.0\text{V}}{5.0\Omega} - 4.2\Omega \cdot \frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega} \quad R_{AB} = 15\Omega \parallel (7.5\Omega + 2.5\Omega)$$

Exercise E1 Analyzing complex Impedances

(written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phasor voltage $\underline{U}_{AB}$ and the internal resistance R_{AB} of the circuit shown in the figure. The components (R and X_L) shall be given.

After analysis, the full bidirectional point impedance has been extracted and is given in the figure. Calculate $\underline{U}_{AB}$ and R_{AB} in Ω .

3. Calculate the physical values of the two components.

$$R_{AB} = 10.67\Omega \quad \varphi = 2.28\text{rad} \quad \varphi = 131.06^\circ$$

Solution

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} \quad \&= \frac{\underline{U}}{\underline{Z}} \quad \&= \frac{50\text{V}}{0.24\Omega + j4.68\Omega} = \frac{50}{4.74\Omega} = 10.55\text{A}$$

The current and voltage are in phase and the circuit is only a pure resistor.

$$\underline{U}_{AB} = \underline{I} \cdot \underline{Z}_{AB} = 10.55\text{A} \cdot (0.24\Omega + j4.68\Omega) = 2.53\text{V} + j49.38\text{V}$$

Therefore, the component 4.68Ω is a pure inductor with the same absolute value of 4.68Ω .

$$\underline{Z}_{AB} = \underline{Z}_1 + \underline{Z}_2 = (0.24\Omega + j4.68\Omega) + (0.24\Omega + j4.68\Omega) = 0.48\Omega + j9.36\Omega$$

$$\underline{U}_{AB} = \underline{I} \cdot \underline{Z}_{AB} = 10.55\text{A} \cdot (0.48\Omega + j9.36\Omega) = 5.06\text{V} + j98.76\text{V}$$

$$\underline{U}_{AB} = 5.06\text{V} + j98.76\text{V} = 99.1\text{V} \angle 8.9^\circ$$

$$\underline{U}_{AB} = 99.1\text{V} \angle 8.9^\circ$$

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{50\text{V}}{0.24\Omega + j4.68\Omega} = 10.55\text{A} \angle -88.1^\circ$$

$$\underline{U}_{AB} = \underline{I} \cdot \underline{Z}_{AB} = 10.55\text{A} \angle -88.1^\circ \cdot (0.48\Omega + j9.36\Omega) = 5.06\text{V} + j98.76\text{V}$$

$$\underline{U}_{AB} = 99.1\text{V} \angle 8.9^\circ$$

$$\underline{U}_{AB} = 99.1\text{V} \angle 8.9^\circ$$

The phase φ_i can be calculated as
$$\varphi_i = \arctan \left(\frac{\text{Im}()}{\text{Re}()} \right) \approx \arctan \left(\frac{-4.68 \sim \Omega}{0.24 \sim \Omega} \right)$$

Exercise E6 Analyzing complex Impedances

(written test, approx. 14 % of a 60-minute written test, WS2022)

2. Now if the price has not increased then (Rule 5 of 6) $\text{mp} \times \frac{\$133.30}{\$133.30 + \text{underline}\{X\}}$ shall be given to the Resultants. (\$\\$ and $\text{underline}\{X\}$ 1\$) shall be given.

After analysis, the full low dimensioned joint impedance tensor is extracted and plotted (figure) in phase plane [Z], i.e. $\text{Re}\{z\} = \frac{1}{2}(z + z^*)$, $\text{Im}\{z\} = \frac{1}{2j}(z - z^*)$. The solution

.. Calculate the physical values of the two components.

$$\text{Solve} \begin{aligned} & \begin{aligned} & \text{begin}{align*} & \text{RuledOnTheFly} \text{Oregan} \text{10.67} \& \#22 \& \backslash \text{rm} \{ \text{Phi} \} \& \text{end}{align*} \\ & \text{end}{align*} \end{aligned} \end{aligned}$$

Solution

$$\underline{I} \models \{ \frac{\underline{U}}{\underline{Z}} \} \wedge \{ 50$$

The current and voltage across the load impedance Z_L are

resulting impedance $Z = R + j\omega L$ under the condition $\omega = 20$ rad/s.

The ω -, the component 4.68, is ω over ω . The ω is ω over ω .

[illegible]
$$| \text{dom}(\sigma) \cap \text{dom}(\tau) | \leq \min \{ |\text{dom}(\sigma)|, |\text{dom}(\tau)| \}$$
[illegible]

```
Vringha)sd(Omega)ue$#uhf(0.24{H}$2$fmmej)cals(fated)a srloeg-in{Omega} \&= 0.24
```

```
H\0Overgae{\|}\r6=j}{(f0nd4e68he{O}négavér&#uRder{lmer{Z}}X)}\|\Send{{{adign*}
```

$$\frac{V}{|0.24 - \Omega + j \cdot 4.68 - \Omega|} \approx \{50$$

With the complex part comes the physical values $\omega = 2\pi f$ and $\omega_0 = 2\pi f_0$

$$\omega = \frac{\omega_L}{2\pi \cdot f} \approx \frac{4.68 \cdot 10^6}{2\pi \cdot 300}$$
$$\varphi_i \text{ can be calculated as } \varphi_i = \arctan \left(\frac{h_i}{r_i} \right)$$
$$\left\{ \frac{\operatorname{Im}(\omega)}{\operatorname{Re}(\omega)} \right\} \right) \approx \arctan \left(\frac{-4.68 \sim \Omega}{0.24} \right)$$
$$\sim \Omega \} \} \right) \} \} \end{align*}$$

Exercise E1 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)

2. All SAEs are resistor values: $2 = 24.7 \pm 1.7$ V, $3 = 1.5$ V, and $4 = 0$ V. In section (f) of 3S, 2 ± 1.0

Results: With a \$200–450-kHz SHF high-power test, a current of 2–50 mA (30–100 A through

\$R_A\$ resistor \$R_1\$ shall have the same absolute value of the impedance as a capacitor

$C_1 = 40 \sim \{\text{nmF}\}$ at $f_1 = 4 \sim \{\text{MHz}\}$.

Solution

Solution

~~Assumes (a) that the current is constant for every component.~~

The equivalent impedance for RS and LS combined is given by

$\{\underline{U}\} \over \{\underline{1}\}} \&= R_2 + \underline{X}_{L2} \&= R_2 + \{\rm j\} \cdot \omega L$ Since $\{\rm j\} \cdot \omega L$ is perpendicular to $\underline{X}_{L2}$, this can be simplified to: $\{\underline{U}\} \over \{\underline{1}\}} = R_2 + \underline{X}_{L2}$

Parallel alignment means that the voltage is the same on R_2 and $\underline{X}_{L2}$. So $\{\underline{U}\} \over \{\underline{1}\}} = R_2 + \underline{X}_{L2}$

Similarly, $\{\underline{U}\} \over \{\underline{3}\}} = R_2 + \underline{X}_{L2} + \underline{X}_{L3}$

So it gets clear that $\{\underline{U}\} \over \{\underline{3}\}} = R_2 + \underline{X}_{L2} + \underline{X}_{L3}$

$\{\underline{U}\} \over \{\underline{3}\}} = R_2 + \underline{X}_{L2} + \underline{X}_{L3}$ is perpendicular to $\{\underline{U}\} \over \{\underline{3}\}}$ (It has to, since R_2 is perpendicular to $\{\rm j\} \cdot \underline{X}_{L3}$, too).

$$\text{Therefore the resultant vector of the parallelogram is given as } \sqrt{\{1\}_{-3C}^2 + \{1\}_{-3R}^2}$$

Back to the first formula:
$$R_3 \cdot I_{3R} = X_{3C} \cdot I_{3C} \parallel R_3 = X_{3C} \cdot \frac{I_{3C}}{I_{3R}} \parallel = \frac{1}{2\pi \cdot f \cdot C_3} \cdot \frac{|\sqrt{|I_{3C}|^2 - |I_{3R}|^2}|}{I_{3R}} \parallel$$

Exercise E7 Impedances at different Frequencies

(written test, approx. 18 % of a 60-minute written test, WS2022)

2. A 10kΩ resistor with a tolerance of $\pm 1\%$ is connected in series with a 10kΩ resistor with a tolerance of $\pm 1\%$. The total resistance is $20k\Omega \pm 1\%$.

Result: $\omega B = 200 - 450 \text{ kHz}$, ω high-gain test circuit $\omega = 50 - 300 \text{ MHz}$. A resistor R_1 shall have the same absolute value of the impedance as a capacitor $C_1 = 40 \text{ nF}$ at $f_1 = 4 \text{ MHz}$.

Solution

Solution

Solution

A series circuit means that the current is constant on every component.

The equivalent impedance for R and L combined is given by $Z = \sqrt{R^2 + \omega^2 L^2}$. Parallel circuit means that the voltage is the same on R and L . $V = IR = I_L Z$. $I = \frac{V}{Z} = \frac{V}{\sqrt{R^2 + \omega^2 L^2}}$.

$$\frac{\{I\} \{3R\}^2}{\{I\} \{3R\}} \quad \text{\texttt{\textbackslash\textbackslash \end{align*}}}$$

Exercise E1 Complex Impedance Circuit

(written test, approx. 15 % of a 60-minute written test, WS2022)


A. Can you describe the current dependence of $\langle u \rangle$ on $\text{signal}[\text{V}]$, $\text{offset}[\text{V}]$, and $\text{noise}[\text{V}]$ such as $\text{Re}[\text{Bandwidth}[\text{Hz}]]$ of the average source $u(t) = 3.0 \sim \text{V} \cdot \sin(2\pi \cdot 15 \sim \text{Hz})$ set at a position at a distance of $10 \sim \text{cm}$?


Solution A linear source is connected with an inductor of $330 \sim \{\rm \mu H\}$ and a capacitor of $30.22 \sim \{\rm \mu F\}$, all in series.

Result

.. Draw the circuit diagram of the given circuit. $48.2 \sim \Omega$ $\parallel$ Z $\&=$ $19.8 \sim \Omega$
 abet all components, voltages, and currents.

$$\begin{aligned} Z &= \frac{\hat{U}}{\hat{I}} \quad \&= \frac{\hat{U}}{Z} \quad \& \\ Z_C &= \frac{1}{2\pi \cdot f \cdot C} \quad \&= \frac{1}{2\pi \cdot 15 \text{ kHz} \cdot 0.22 \text{ }\mu\text{F}} \end{aligned}$$
$$\text{With } \frac{1}{\sqrt{2}} \text{ over } \sqrt{2} \text{ that } \{ \& \begin{array}{l} \text{begin{align*}} \\ \text{\& kHz} \end{array} \cdot 0.22 \\ \frac{1}{\sqrt{2}} \text{ over } \sqrt{2} \text{ that } \{ \frac{\hat{U}}{Z} \} \& \{ \frac{1}{\sqrt{2}} \} \cdot$$
$$\begin{aligned} \omega &= \frac{1}{2\pi} \left(\frac{1}{\tau} \right) \approx \frac{1}{2\pi \times 15 \text{ ns}} \\ &\approx 5.3 \text{ MHz} \end{aligned}$$
$$\begin{aligned} \underline{Z} &= R + \underline{Z}_L + \underline{Z}_C \quad \&= R + j \\ \dot{\underline{Z}}_L - j \dot{\underline{Z}}_C \quad \&= R + j \dot{\underline{Z}}_L - \dot{\underline{Z}}_C \quad \&= \\ \sqrt{R^2 + (\underline{Z}_L - \underline{Z}_C)^2} \quad \& \end{aligned}$$

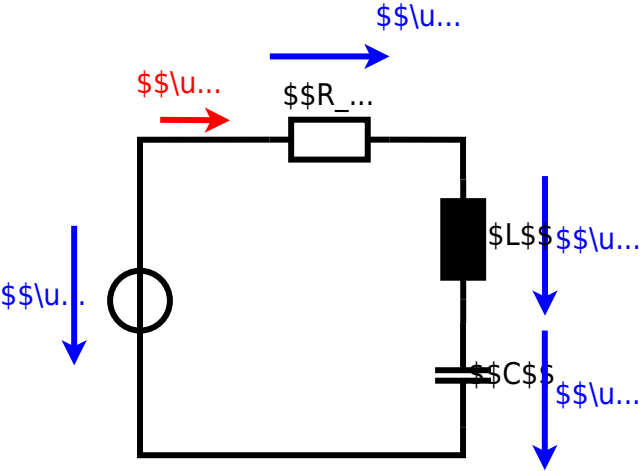

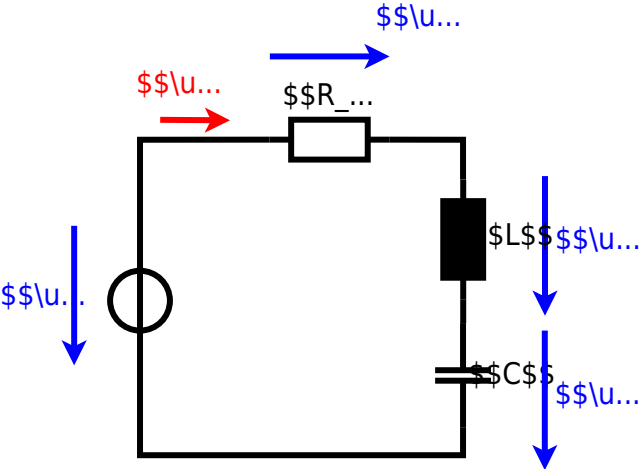

Exercise E1 Pure Resistor Network Simplification


(written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall now be closed at 100 Ω and the equivalent resistance R_{eq} between A and B shall be given.

Solution

$$R_{\text{eq}} = 133.8 \, \Omega$$

Now a wye-delta transformation is necessary.

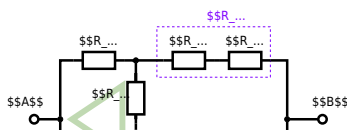

Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) = 33.33 \, \Omega + (33.33 \, \Omega + 400 \, \Omega) \parallel (33.33 \, \Omega + 100 \, \Omega)$$

The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

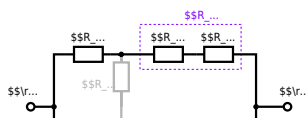

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \sim \Omega + 200 \sim \Omega + 200 \sim \Omega) \parallel (100 \sim \Omega + 100 \sim \Omega) \parallel R_{\text{eq}} = (500 \sim \Omega) \parallel (200 \sim \Omega) \parallel R_{\text{eq}} = \{ \{ 500 \sim \Omega \cdot 200 \sim \Omega \} \over {500 \sim \Omega + 200 \sim \Omega} \} \parallel$$

Exercise E1 Charging Capacitors


(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit below is a simple RC circuit. It consists of a DC voltage source U , a resistor R_1 , a capacitor C , and a switch S . The switch S is initially open. The voltage across the capacitor is again 0 V at the moment $t_0 = 0 \text{ s}$ when the switch S is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.


Result
To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

Solution
The equivalent voltage source is $U_{\text{eq}} = U \cdot \frac{R_2}{R_1 + R_2}$ and the equivalent resistance is $R_{\text{eq}} = R_1 \parallel R_2$. The voltage across the capacitor is $u_c(t) = U_{\text{eq}} (1 - e^{-t/R_{\text{eq}}C})$.

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .

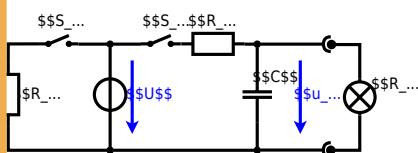


The circuit contains a voltage source $U=12\text{ V}$, a switch S_1 , a resistor of $R_1=20\text{ }\Omega$ and a capacitor of $C=100\text{ }\mu\text{F}$. The switch S_2 to an additional consumer R_2 will be considered to be open for the first task. At the moment $t_0=0\text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0)=0\text{ V}$.

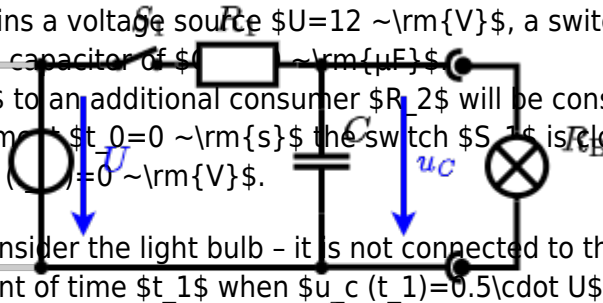

First do not consider the light bulb - it is not connected to the RC circuit.

Calculate the point of time t_1 when $u_c(t_1)=0.5 \cdot U$.

Solution

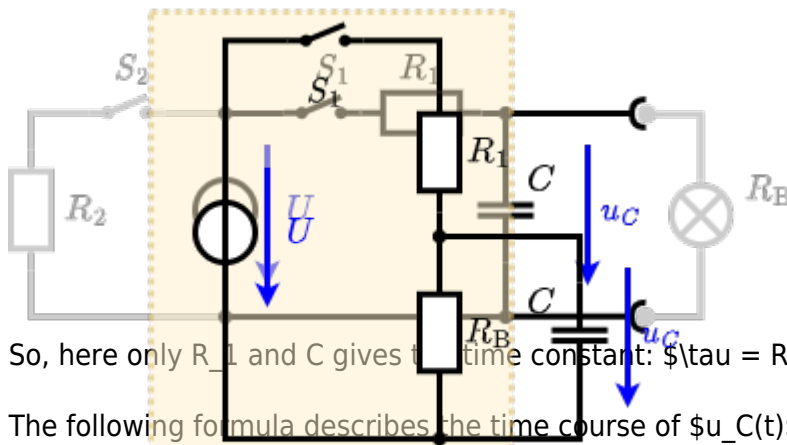

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_c(t)$ which has to be $u_c(t_1)=0.5 \cdot U$:

$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5$. An equivalent linear voltage source can be given with U_s , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$. The internal resistance is given by substituting the ideal voltage source with its resistance ($=0\text{ }\Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10\text{ }\Omega$$

$$u_c(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1\text{ ms}/(10\text{ }\Omega \cdot 100\text{ }\mu\text{F})})$$

Exercise E5 Charging Capacitors

(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (see the solution) consists of a 12 V DC voltage source U , a switch S_1 , a resistor $R_1=20\text{ }\Omega$, a capacitor $C=100\text{ }\mu\text{F}$, and a light bulb $R_B=20\text{ }\Omega$. The voltage across the capacitor is again 0 V at the moment $t_0=0\text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2=1\text{ ms}$ after closing the switch.

Solution


To solve this, first create an equivalent linear voltage source from U , R_1 , and R_B .

$$U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U = 6\text{ V}$$

Solution

The ideal voltage source is given by $U_s = U \cdot \frac{R_1}{R_1 + R_B}$ and the internal resistance is given by $R_i = R_1 \parallel R_B$.

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .

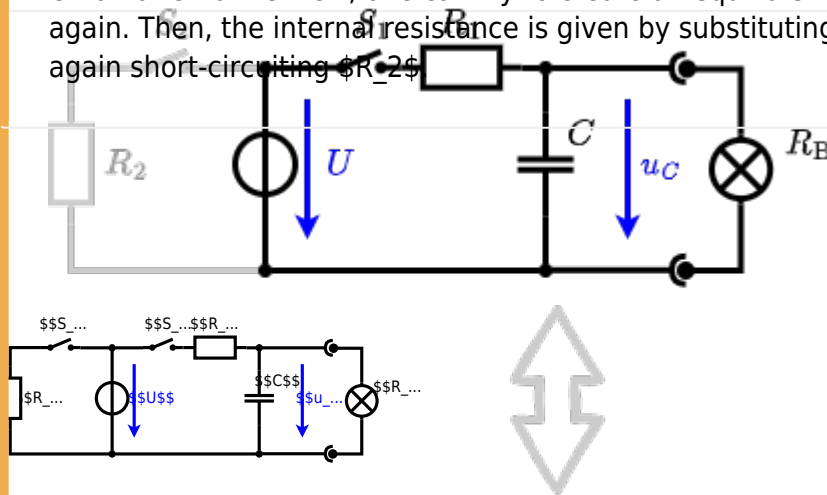


The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ }\Omega$ and a capacitor of $C = 100 \text{ }\mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first tasks. At the moment $t_0 = 0$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

First do not consider the light bulb - it is not connected to the RC circuit.

Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

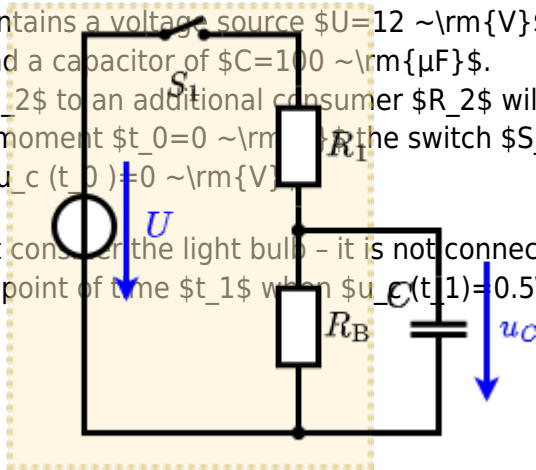

Solution

An equivalent linear voltage source can be given with U_s , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$. The internal resistance is given by substituting the ideal voltage source with its resistance ($R_i = 0 \text{ }\Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10 \text{ }\Omega$$

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_c(t)$ which has to be $u_c(t_1) = 0.5 \cdot U$:

$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$

It has to be rearranged to t :

$$(1 - e^{-t/\tau}) = 0.5 \implies e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = -\tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$$

Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. Additionally, explain why the effect of constant temperature inside the refrigerator can be identified. Result: The resistance of the thermistor is $R = 10 \cdot 10^3 \Omega$ at $T = 25^\circ\text{C}$ for your answer.

Its temperature coefficients are: $\alpha = 0.01 \cdot 10^{-6} \cdot 10^6 \cdot 10^3 \cdot 10^3$ and $\beta = 71 \cdot 10^6 \cdot 10^3 \cdot 10^3$

Result: The temperature inside the refrigeration system can reach down to -40°C .

Calculate the resistance of the thermistor at -40°C .

The resistance of the thermistor is $R = 10 \cdot 10^3 \Omega$ at $T = 25^\circ\text{C}$. Therefore, a solution is to use a thermistor that floats up the refrigeration system. Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) \quad | \quad \Delta T = T_{\text{end}} - T_{\text{start}} \\ R = 10 \cdot 10^3 \Omega \cdot \left(1 + 0.01 \cdot 10^{-6} \cdot (-40 - 25) + 71 \cdot 10^6 \cdot (-40 - 25)^2 \right)$$

Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. Additionally, explain why the effect of constant temperature inside the refrigerator can be identified. Result: The resistance of the thermistor is $R = 10 \cdot 10^3 \Omega$ at $T = 25^\circ\text{C}$ for your answer.

Its temperature coefficients are: $\alpha = 0.01 \cdot 10^{-6} \cdot 10^6 \cdot 10^3 \cdot 10^3$ and $\beta = 71 \cdot 10^6 \cdot 10^3 \cdot 10^3$

Result: The temperature inside the refrigeration system can reach down to -40°C .

Calculate the resistance of the thermistor at -40°C .

The resistance of the thermistor is $R = 10 \cdot 10^3 \Omega$ at $T = 25^\circ\text{C}$. Therefore, a solution is to use a thermistor that floats up the refrigeration system. Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) \quad | \quad \Delta T = T_{\text{end}} - T_{\text{start}} \\ R = 10 \cdot 10^3 \Omega \cdot \left(1 + 0.01 \cdot 10^{-6} \cdot (-40 - 25) + 71 \cdot 10^6 \cdot (-40 - 25)^2 \right)$$

Exercise E3 Pure Resistor Network Simplification


(written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall now be closed and integrated, $R_2 = R_3 = 100 \Omega$ and the switch between R_3 and R_4 shall be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

$$R_{\text{eq}} = 133.8 \Omega$$

Now a wye-delta transformation is necessary.

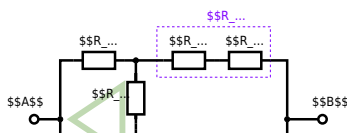

Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_3}{R_2 + R_3} = \frac{100 \cdot 100}{100 + 100} = 50 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_1 + (R_Y + R_4) \parallel (R_Y + R_5)$$

.. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

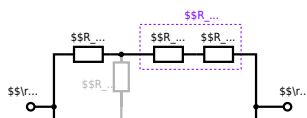

The equivalent resistor is given by a parallel configuration of resistors in series:

$$\begin{aligned} R_{\text{eq}} &= (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \sim \Omega + 200 \sim \Omega + 200 \sim \Omega) \parallel (100 \sim \Omega + 100 \sim \Omega) \parallel \\ R_{\text{eq}} &= (500 \sim \Omega) \parallel (200 \sim \Omega) \parallel R_{\text{eq}} = \{ \{ 500 \sim \Omega \cdot 200 \sim \Omega \} \over {500 \sim \Omega + 200 \sim \Omega} \} \parallel \\ \end{aligned}$$

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

2. The heating element made of solid nichrome wire with a temperature coefficient of $180 \sim \Omega / ^\circ \text{C}$. Electric power dissipation (= heat flow) of $P=40 \sim \text{W}$ is necessary.

Calculate the current I needed to operate for heating elements.

The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6} \sim \Omega \cdot \text{m}$.

The heating element is $3 \sim \text{m}$ long and has a diameter of $3.57 \sim \text{mm}$.

Calculate the resistance R of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \\ \sqrt{\frac{P}{R}} &= \sqrt{\frac{40 \sim \text{W}}{0.33 \sim \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \text{with } A = r^2 \cdot \pi = \\ \frac{1}{4} d^2 \cdot \pi \quad R &= \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \text{and } R = \\ 1.10 \cdot 10^{-6} \sim \Omega \cdot \text{m} \cdot \frac{4 \cdot 3 \sim \text{m}}{(3.57 \cdot 10^{-3} \sim \text{m})^2 \cdot \pi} \quad \end{aligned}$$

Exercise E1 Resistance of a Wire by Resistivity

(written test, approx. 6 % of a 60-minute written test, WS2022)

2. For a heating element is used to heat wire even to a temperature of 180°C . An electric power dissipation (= heat flow) of $P=40\text{ W}$ is necessary.

Calculate the current I needed to operate it.

The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6}\text{ }\Omega\text{ m}$.

The heating element is 3 m long and has a diameter of 3.57 mm .

∴ Calculate the resistance R of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \\ \sqrt{\frac{P}{R}} &= \sqrt{\frac{40\text{ W}}{0.33\text{ }\Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \text{with } A = r^2 \cdot \pi = \\ \frac{1}{4} d^2 \cdot \pi \quad R &= \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \text{and } R = \\ 1.10 \cdot 10^{-6}\text{ }\Omega\text{ m} \cdot \frac{4 \cdot 3\text{ m}}{(3.57 \cdot 10^{-3}\text{ m})^2 \cdot \pi} \end{aligned}$$

From:

<https://wiki.mexle.te.hs-heilbronn.de/> - MEXLE Wiki

Permanent link:

https://wiki.mexle.te.hs-heilbronn.de/electrical_engineering_1/ws2022_exam?rev=1680241645

Last update: 2023/03/31 07:47

