

Exam Winter Semester 2022

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	3
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	3
Exercise E1 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	3
Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	4
Exercise E1 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	5
Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	6
Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	8
Exercise E4 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	12
Exercise E1 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022)	16
Exercise E5 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022)	17
Exercise E1 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	19
Exercise E6 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	19
Exercise E1 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	20
Exercise E7 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	20
Exercise E1 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	

test, WS2022)	21
Exercise E8 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written	
test, WS2022)	24

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

A heating element made of solid nichrome wire with a temperature coefficient of $1.80 \cdot 10^{-5} \text{ K}^{-1}$ is used. The electric power dissipation (= heat flow) of $P = 40 \text{ W}$ is necessary.

Determine the current I linked to the operating voltage for heating elements.

The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6} \text{ } \Omega \cdot \text{m}$.

The heating element is 3 m long and has a diameter of 3.57 mm .

∴ Calculate the resistance R of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} \\ &= \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \text{with } A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \\ R &= \rho \cdot \frac{l}{\frac{1}{4} d^2 \cdot \pi} \quad \text{with } R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \text{m} \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

A heating element made of solid nichrome wire with a temperature coefficient of $1.80 \cdot 10^{-5} \text{ K}^{-1}$ is used. The electric power dissipation (= heat flow) of $P = 40 \text{ W}$ is necessary.

Determine the current I linked to the operating voltage for heating elements.

The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6} \text{ } \Omega \cdot \text{m}$.

The heating element is 3 m long and has a diameter of 3.57 mm .

∴ Calculate the resistance R of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} \\ &= \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \text{with } A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \\ R &= \rho \cdot \frac{l}{\frac{1}{4} d^2 \cdot \pi} \quad \text{with } R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \text{m} \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

Exercise E1 Temperature-dependent Resistance

(written test, approx. 6 % of a 60-minute written test, WS2022)

2. A digital display shows a temperature coefficient of resistance of a thermistor. The thermistor has a resistance of $10 \text{ k}\Omega$ at 25°C . Its temperature coefficients are: $\alpha = 0.01 \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$.

Result: The temperature inside the refrigeration system can reach down to -40°C .

Calculate the resistance of the thermistor at -40°C .

$$R = 10 \text{ k}\Omega \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = 10 \text{ k}\Omega \cdot (1 + 0.01 \cdot (-40 - 25) + 71 \cdot 10^{-6} \cdot (-40 - 25)^2)$$

Exercise E2 Temperature-dependent Resistance**(written test, approx. 6 % of a 60-minute written test, WS2022)**

2. A digital display shows a temperature coefficient of resistance of a thermistor. The thermistor has a resistance of $10 \text{ k}\Omega$ at 25°C . Its temperature coefficients are: $\alpha = 0.01 \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$.

Result: The temperature inside the refrigeration system can reach down to -40°C .

Calculate the resistance of the thermistor at -40°C .

$$R = 10 \text{ k}\Omega \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = 10 \text{ k}\Omega \cdot (1 + 0.01 \cdot (-40 - 25) + 71 \cdot 10^{-6} \cdot (-40 - 25)^2)$$

Exercise E1 Pure Resistor Network Simplification


(written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall now be closed and integrated, $R_2 = R_3 = 100 \Omega$ and the switch between R_2 and R_3 shall be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

$$R_{\text{eq}} = 133.8 \Omega$$

Now a wye-delta transformation is necessary.

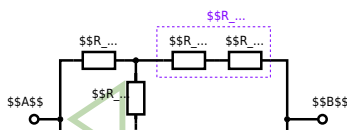

Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) = 33.33 \Omega + (33.33 \Omega + 100 \Omega + 100 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

.. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

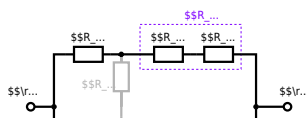

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{eq} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel (100 \, \Omega + 200 \, \Omega + 200 \, \Omega) \parallel (100 \, \Omega + 100 \, \Omega) \parallel (500 \, \Omega) \parallel (200 \, \Omega) \parallel (500 \, \Omega \cdot 200 \, \Omega) / (500 \, \Omega + 200 \, \Omega)$$


Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved with \$R_1=200 \, \Omega\$, \$R_2=100 \, \Omega\$, \$R_3=150 \, \Omega\$, \$R_4=100 \, \Omega\$, and \$R_5=500 \, \Omega\$.
Result given: \$R_{eq}=132.8 \, \Omega\$.

Solution

$$R_{eq} = 132.8 \, \Omega$$

Now a wye-delta transformation is necessary.

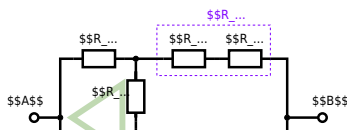


Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:
$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \, \Omega + (33.33 \, \Omega + 400 \, \Omega) \parallel (33.33 \, \Omega + 100 \, \Omega) \parallel$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

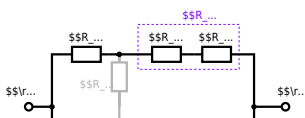


The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \, \Omega + 200 \, \Omega + 200 \, \Omega) \parallel (100 \, \Omega + 100 \, \Omega) \parallel R_{\text{eq}} = (500 \, \Omega) \parallel (200 \, \Omega) \parallel R_{\text{eq}} = \frac{500 \, \Omega \cdot 200 \, \Omega}{500 \, \Omega + 200 \, \Omega} \parallel R_{\text{eq}}$$

Exercise E1 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.
Result

$$U_{\text{s}} = U_{\text{AB}} = 4.5 \, \text{V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \, \Omega$$

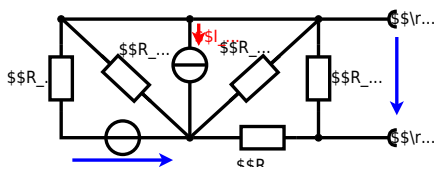


Calculate the internal resistance R_i and the source voltage U_s of an equivalent linear voltage source on the connectors A and B.

$R_1 = 5.0 \, \Omega$, $U_2 = 6.0 \, \text{V}$, $R_3 = 10 \, \Omega$, $I_4 = 4.2 \, \text{A}$, $R_5 = 10 \, \Omega$, $R_6 = 7.5 \, \Omega$, $R_7 = 15 \, \Omega$


Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

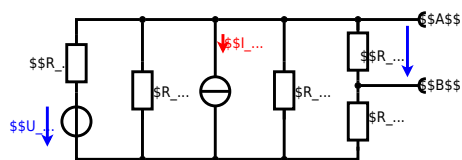

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

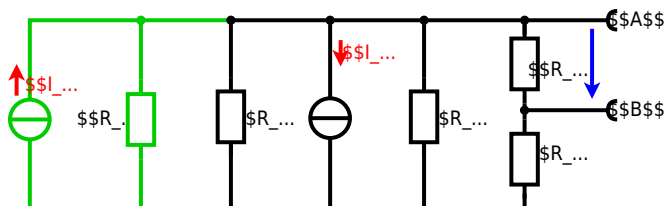

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_{24} and I_{14} :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_{24} - I_{14} = \frac{U_{24}}{R_1} - I_{14}$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{135}$$

$$U_{24} = U_2 \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} - \left(\frac{U_2}{R_1} - I_4 \right) \cdot \frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($= 0 \Omega$, so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$


with $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \Omega \cdot \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \\ R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

Exercise E4 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.
Result


$$U_s = U_{AB} = 4.5 \text{ V} \quad R_i = R_{AB} = 6 \Omega$$

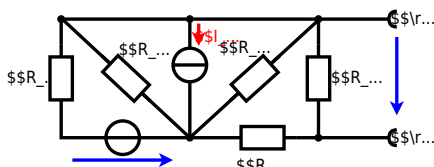


Calculate the internal resistance R_{int} and the source voltage U_s of an equivalent linear voltage source on the connectors A and B. $\begin{aligned} R_1 &= 5.0 \, \Omega, \quad U_2 = 6.0 \, \text{V}, \quad R_3 = 10 \, \Omega, \quad I_4 = 4.2 \, \text{A}, \\ R_5 &= 10 \, \Omega, \quad R_6 = 7.5 \, \Omega, \quad R_7 = 15 \, \Omega \end{aligned}$ Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

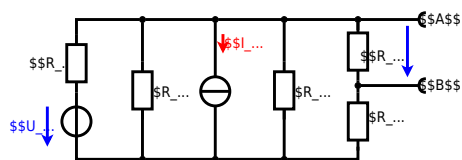

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

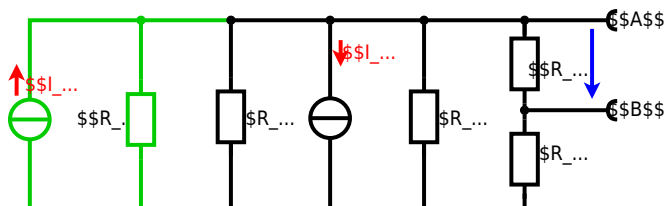

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_2}{R_1} - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{135}$$

$$I_{24} = \frac{U_{24}}{R_1 + R_3 + R_5} = \frac{(U_1 - U_4) \cdot R_1}{R_1 + R_3 + R_5}$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 + R_3 + R_5} = \frac{(U_1 - U_4) \cdot R_7 \cdot R_1}{R_6 + R_7 + R_1 + R_3 + R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0\Omega$, so a short-circuit):

$$R_{AB} = R_7 \parallel (R_6 + R_1 + R_3 + R_5)$$

with $R_1 + R_3 + R_5 = 5\Omega \parallel 10\Omega \parallel 10\Omega = 5\Omega \parallel 5\Omega = 2.5\Omega$:

$$U_{AB} = \frac{6.0\text{V}}{5.0\Omega} \cdot 4.2\Omega \cdot \frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega} = 15\Omega \parallel (7.5\Omega + 2.5\Omega)$$

Exercise E1 Charging Capacitors


(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit below is a simplified model of a circuit for charging a capacitor. The voltage across the capacitor is again 0V at the moment $t_0=0\text{s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2=1\text{ms}$ after closing the switch.


Hint: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

Solution: The equivalent circuit is shown below. The voltage source is $U_{eq} = \frac{U \cdot R_2}{R_1 + R_2}$ and the internal resistance is $R_{eq} = R_1 \parallel R_2$.

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .

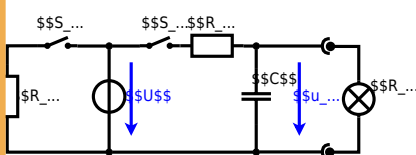


The circuit contains a voltage source $U=12\text{ V}$, a switch S_1 , a resistor of $R_1=20\text{ }\Omega$ and a capacitor of $C=100\text{ }\mu\text{F}$. The switch S_2 to an additional consumer R_2 will be considered to be open for the first task. At the moment $t_0=0\text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0)=0\text{ V}$.

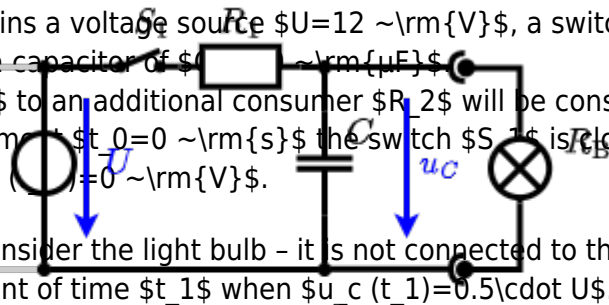

First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time t_1 when $u_c(t_1)=0.5 \cdot U$.

Solution

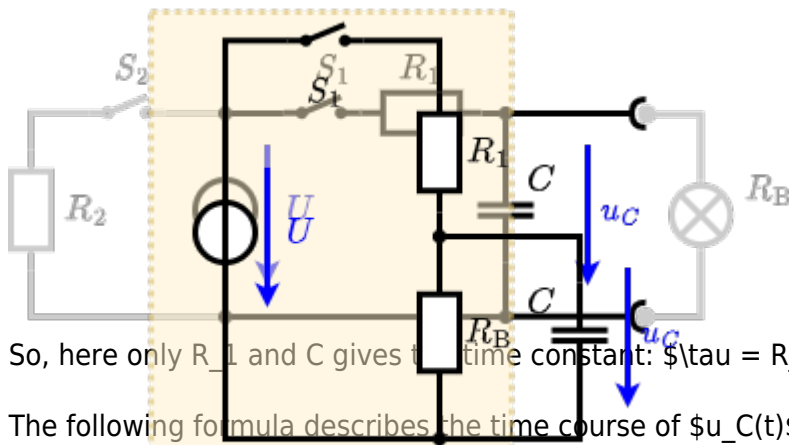

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_c(t)$ which has to be $u_c(t_1)=0.5 \cdot U$:
$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5$. An equivalent linear voltage source can be given with U_s , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$. The internal resistance is given by substituting the ideal voltage source with its resistance ($=0\text{ }\Omega$, short-circuit).
$$R_i = R_1 \parallel R_B = 10\text{ }\Omega$$

$$u_c(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1\text{ ms}/(10\text{ }\Omega \cdot 100\text{ }\mu\text{F})})$$

Exercise E5 Charging Capacitors

(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit diagram shows a voltage source $U=12\text{ V}$, a switch S_1 , a resistor of $R_1=20\text{ }\Omega$ and a capacitor of $C=100\text{ }\mu\text{F}$. The switch S_2 to an additional consumer R_2 will be considered to be open for the first task. At the moment $t_0=0\text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2=1\text{ ms}$ after closing the switch.


Solution

To solve this, first create an equivalent linear voltage source from U , R_1 , and R_B .
$$U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U = 6\text{ V}$$

Solution

begin{align*} U_{R_2} = U \cdot \frac{R_2}{R_1 + R_2} = 12 \text{ V} \cdot \frac{20 \text{ } \Omega}{20 \text{ } \Omega + 20 \text{ } \Omega} = 6 \text{ V} \end{align*}

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2

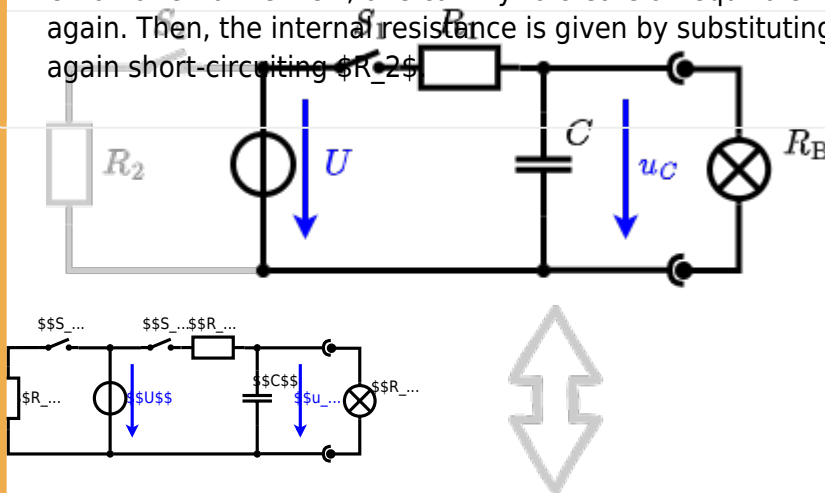


The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ } \Omega$ and a capacitor of $C = 100 \text{ } \mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first tasks. At the moment $t_0 = 0$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

.. First do not consider the light bulb - it is not connected to the RC circuit.

Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

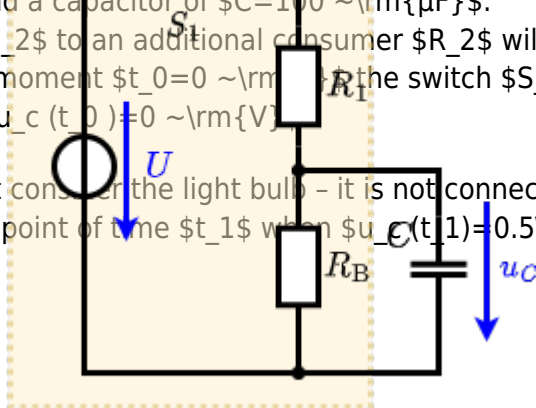

Solution

An equivalent linear voltage source can be given with U , R_1 , and R_{B} as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_{\text{B}}}{R_1 + R_{\text{B}}} = \frac{1}{2} \cdot U$ The internal resistance is given by substituting the ideal voltage source with its resistance ($= 0 \text{ } \Omega$, short-circuit).

$$R_i = R_1 \parallel R_{\text{B}} = 10 \text{ } \Omega$$

$$u_c(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-t_2/(10 \text{ } \Omega \cdot 100 \text{ } \mu\text{F})})$$

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_c(t)$ which has to be $u_c(t_1) = 0.5 \cdot U$:

$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$

It has to be rearranged to t

$$(1 - e^{-t/\tau}) = 0.5 \implies e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = -\tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$$

Exercise E1 Analyzing complex Impedances**(written test, approx. 14 % of a 60-minute written test, WS2022)**

2. Calculate the phase angle of the solution $\underline{U} = 50 \angle 0^\circ$ mV, $\underline{Z} = 0.24 \angle 60^\circ \Omega$ and $\underline{Z} = 4.68 \angle -20^\circ \Omega$ through the components. (R and X_L) shall be given.

After analysis, the full bridge dimensioned impedance can be extracted and the phase angle φ in phase (calculated) $\varphi = \arctan\left(\frac{\text{Im}(Z)}{\text{Re}(Z)}\right) = \arctan\left(\frac{4.68 \sin(-20^\circ)}{0.24 + 4.68 \cos(-20^\circ)}\right) = -87.06^\circ$

.. Calculate the physical values of the two components.

Solution $\begin{aligned} R &= 0.24 \Omega \\ X_L &= 4.68 \Omega \end{aligned}$

Solution

$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{50 \angle 0^\circ}{0.24 \angle 60^\circ + 4.68 \angle -20^\circ}$
 The current and voltage are in phase only if the impedance is purely real.
 resulting impedance $\underline{Z} = 0.24 \angle 60^\circ + 4.68 \angle -20^\circ$
 Therefore, the component $4.68 \angle -20^\circ$ is a capacitor with the same absolute value of $4.68 \angle -20^\circ$
 impedance $\underline{Z} = 0.24 \angle 60^\circ + 4.68 \angle -20^\circ$
 $\underline{Z} = 0.24 \cos(60^\circ) + j0.24 \sin(60^\circ) + 4.68 \cos(-20^\circ) - j4.68 \sin(-20^\circ)$
 $\underline{Z} = 0.12 + j0.2078 + 4.42 - j1.59$
 $\underline{Z} = 4.54 - j1.38$
 $\varphi = \arctan\left(\frac{\text{Im}(Z)}{\text{Re}(Z)}\right) = \arctan\left(\frac{-1.38}{4.54}\right) = -16.9^\circ$
 The phase angle φ can be calculated as $\varphi = \arctan\left(\frac{\text{Im}(Z)}{\text{Re}(Z)}\right)$
 $\varphi = \arctan\left(\frac{-1.38}{4.54}\right) = -16.9^\circ$
 With the complex part $4.68 \angle -20^\circ$ is a capacitor with the same absolute value of $4.68 \angle -20^\circ$
 $\underline{Z} = 0.24 \angle 60^\circ + 4.68 \angle -20^\circ$
 $\underline{Z} = 0.12 + j0.2078 + 4.42 - j1.59$
 $\underline{Z} = 4.54 - j1.38$
 The phase angle φ can be calculated as $\varphi = \arctan\left(\frac{\text{Im}(Z)}{\text{Re}(Z)}\right)$
 $\varphi = \arctan\left(\frac{-1.38}{4.54}\right) = -16.9^\circ$

Exercise E6 Analyzing complex Impedances**(written test, approx. 14 % of a 60-minute written test, WS2022)**

2. Calculate the phase angle of the solution $\underline{U} = 50 \angle 0^\circ$ mV, $\underline{Z} = 0.24 \angle 60^\circ \Omega$ and $\underline{Z} = 4.68 \angle -20^\circ \Omega$ through the components. (R and X_L) shall be given.

After analysis, the full bridge dimensioned impedance can be extracted and the phase angle φ in phase (calculated) $\varphi = \arctan\left(\frac{\text{Im}(Z)}{\text{Re}(Z)}\right) = \arctan\left(\frac{4.68 \sin(-20^\circ)}{0.24 + 4.68 \cos(-20^\circ)}\right) = -87.06^\circ$

.. Calculate the physical values of the two components.

Solution $\begin{aligned} R &= 0.24 \Omega \\ X_L &= 4.68 \Omega \end{aligned}$

Solution

$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{50 \angle 0^\circ}{0.24 \angle 60^\circ + 4.68 \angle -20^\circ}$
 The current and voltage are in phase only if the impedance is purely real.
 resulting impedance $\underline{Z} = 0.24 \angle 60^\circ + 4.68 \angle -20^\circ$
 Therefore, the component $4.68 \angle -20^\circ$ is a capacitor with the same absolute value of $4.68 \angle -20^\circ$
 impedance $\underline{Z} = 0.24 \angle 60^\circ + 4.68 \angle -20^\circ$
 $\underline{Z} = 0.24 \cos(60^\circ) + j0.24 \sin(60^\circ) + 4.68 \cos(-20^\circ) - j4.68 \sin(-20^\circ)$
 $\underline{Z} = 0.12 + j0.2078 + 4.42 - j1.59$
 $\underline{Z} = 4.54 - j1.38$
 $\varphi = \arctan\left(\frac{\text{Im}(Z)}{\text{Re}(Z)}\right) = \arctan\left(\frac{-1.38}{4.54}\right) = -16.9^\circ$
 The phase angle φ can be calculated as $\varphi = \arctan\left(\frac{\text{Im}(Z)}{\text{Re}(Z)}\right)$
 $\varphi = \arctan\left(\frac{-1.38}{4.54}\right) = -16.9^\circ$

The absolute value of the impedance is $Z = \sqrt{(0.24 \sim \Omega)^2 + (4.68 \sim \Omega)^2} = 4.7 \sim \Omega$
 The phase φ is $\varphi = \arctan\left(\frac{4.68 \sim \Omega}{0.24 \sim \Omega}\right) = 87.1^\circ$
 With the complex part comes the physical value: $X_L = \omega L = 2\pi f L = 2\pi \cdot 4.7 \sim \Omega \cdot 10^{-6} \text{ s} = 29.4 \sim \mu\text{s}$
 The phase φ is $\varphi = \arctan\left(\frac{4.68 \sim \Omega}{0.24 \sim \Omega}\right) = 87.1^\circ$
 The phase φ is $\varphi = \arctan\left(\frac{4.68 \sim \Omega}{0.24 \sim \Omega}\right) = 87.1^\circ$

Exercise E1 Impedances at different Frequencies

(written test, approx. 18 % of a 60-minute written test, WS2022)

A series circuit means that the current is constant on every component.
 The equivalent impedance for R and L combined is given by $Z = \sqrt{R^2 + X_L^2}$
 Parallel circuit means that the voltage is the same on R_3 and C_2
 The equivalent impedance for R_3 and C_2 combined is given by $Z = \frac{R_3 \cdot X_C}{R_3 + X_C}$
 Back to the first formula: $R_3 \cdot X_C = Z^2 \cdot \omega C$
 Result: $R_3 = \frac{Z^2 \cdot \omega C}{X_C} = \frac{Z^2 \cdot \omega C}{\frac{1}{\omega C}} = Z^2 \cdot \omega^2 C^2 = 10.0 \sim \Omega$
 Back to the first formula: $R_3 \cdot X_C = Z^2 \cdot \omega C$
 Result: $R_3 = \frac{Z^2 \cdot \omega C}{X_C} = \frac{Z^2 \cdot \omega C}{\frac{1}{\omega C}} = Z^2 \cdot \omega^2 C^2 = 10.0 \sim \Omega$

Solution

$R_1 = 1.00 \sim \Omega$

$R_2 = 10.0 \sim \Omega$

A series circuit means that the current is constant on every component.

The equivalent impedance for R and L combined is given by $Z = \sqrt{R^2 + X_L^2}$

Parallel circuit means that the voltage is the same on R_3 and C_2
 The equivalent impedance for R_3 and C_2 combined is given by $Z = \frac{R_3 \cdot X_C}{R_3 + X_C}$
 Back to the first formula: $R_3 \cdot X_C = Z^2 \cdot \omega C$
 Result: $R_3 = \frac{Z^2 \cdot \omega C}{X_C} = \frac{Z^2 \cdot \omega C}{\frac{1}{\omega C}} = Z^2 \cdot \omega^2 C^2 = 10.0 \sim \Omega$

Back to the first formula: $R_3 \cdot X_C = Z^2 \cdot \omega C$
 Result: $R_3 = \frac{Z^2 \cdot \omega C}{X_C} = \frac{Z^2 \cdot \omega C}{\frac{1}{\omega C}} = Z^2 \cdot \omega^2 C^2 = 10.0 \sim \Omega$

Therefore, the resulting current of the parallel circuit is given as: $I = \frac{U}{Z}$

$I = \frac{U}{Z} = \frac{10 \text{ V}}{10.0 \sim \Omega} = 1.0 \text{ A}$

Back to the first formula: $R_3 \cdot X_C = Z^2 \cdot \omega C$
 Result: $R_3 = \frac{Z^2 \cdot \omega C}{X_C} = \frac{Z^2 \cdot \omega C}{\frac{1}{\omega C}} = Z^2 \cdot \omega^2 C^2 = 10.0 \sim \Omega$

Back to the first formula: $R_3 \cdot X_C = Z^2 \cdot \omega C$
 Result: $R_3 = \frac{Z^2 \cdot \omega C}{X_C} = \frac{Z^2 \cdot \omega C}{\frac{1}{\omega C}} = Z^2 \cdot \omega^2 C^2 = 10.0 \sim \Omega$

Back to the first formula: $R_3 \cdot X_C = Z^2 \cdot \omega C$
 Result: $R_3 = \frac{Z^2 \cdot \omega C}{X_C} = \frac{Z^2 \cdot \omega C}{\frac{1}{\omega C}} = Z^2 \cdot \omega^2 C^2 = 10.0 \sim \Omega$

Back to the first formula: $R_3 \cdot X_C = Z^2 \cdot \omega C$
 Result: $R_3 = \frac{Z^2 \cdot \omega C}{X_C} = \frac{Z^2 \cdot \omega C}{\frac{1}{\omega C}} = Z^2 \cdot \omega^2 C^2 = 10.0 \sim \Omega$

Back to the first formula: $R_3 \cdot X_C = Z^2 \cdot \omega C$
 Result: $R_3 = \frac{Z^2 \cdot \omega C}{X_C} = \frac{Z^2 \cdot \omega C}{\frac{1}{\omega C}} = Z^2 \cdot \omega^2 C^2 = 10.0 \sim \Omega$

Back to the first formula: $R_3 \cdot X_C = Z^2 \cdot \omega C$
 Result: $R_3 = \frac{Z^2 \cdot \omega C}{X_C} = \frac{Z^2 \cdot \omega C}{\frac{1}{\omega C}} = Z^2 \cdot \omega^2 C^2 = 10.0 \sim \Omega$

Exercise E7 Impedances at different Frequencies

(written test, approx. 18 % of a 60-minute written test, WS2022)

Reactive power is the real resistor value of $20 \pm 3 \text{ m}\Omega$ in parallel with a capacitor having impedance of $35 \pm 3 \text{ }\Omega$. B.O
 $\sim \text{m}\Omega$, $\text{fitB} = 200 \pm 45 \text{ m}\Omega$, Hz high-gate test current $\text{fitB} = 50 \text{ }\mu\text{A}$ $\sim \text{m}\Omega$ through
 a resistor R_1 shall have the same absolute value of the impedance as a capacitor
 $C_1 = 40 \text{ nF}$ at $f_1 = 4 \text{ MHz}$.

$$\begin{aligned} \text{solution} \quad \begin{aligned} \text{begin}\{align*\} \quad R_1 &= 1.00 \sim \Omega \end{aligned} \\ \text{solution} \quad \begin{aligned} \text{begin}\{align*\} \quad R_2 &= 10.0 \sim \Omega \end{aligned} \\ \text{solution} \end{aligned}$$

A series circuit means that the current is constant on every component.

The equivalent impedance for R_S and L_S combined is given by $\begin{aligned} \text{Parallel circuit means that the voltage is the same on } R_S \text{ and } L_S \\ \text{Since } \underline{I}_S \text{ is perpendicular to } \underline{I}_L \text{ then } \underline{I}_S^2 = \underline{I}_R^2 + \underline{I}_L^2 \\ \text{Therefore the resulting current of the parallel circuit is given as:} \\ \underline{I}_S = \sqrt{\underline{I}_R^2 + \underline{I}_L^2} \end{aligned}$


Exercise E1 Complex Impedance Circuit


(written test, approx. 15 % of a 60-minute written test, WS2022)


A. On a circuit, three identical impedances Z are in series with Z_1 , Z_2 , and Z_3 in parallel. The source voltage is $V_s(t) = 3.0 \sin(2\pi \cdot 15 \cdot t)$ V. The average power dissipated in the circuit is $P = 1.0$ W. Find the average power dissipated in each impedance Z .

Solution
This linear source is connected with an inductor of $330 \sim \{\rm \mu H\}$ and a capacitor of $0.22 \sim \{\rm \mu F\}$, all in series.

$$\begin{aligned} Z &= 107.3 \, \Omega \parallel (48.2 \, \Omega + j19.8 \, \Omega) \\ Z &= 84.5 \, \Omega - j37.5 \, \Omega \end{aligned}$$
$$\begin{aligned} \omega &= \frac{\sqrt{Z_L^2 + Z_C^2}}{L} = \frac{\sqrt{R^2 + (\underline{Z}_L - \underline{Z}_C)^2}}{L} \\ &= \frac{1}{L} \sqrt{R^2 + (\underline{Z}_L - \underline{Z}_C)^2} \end{aligned}$$



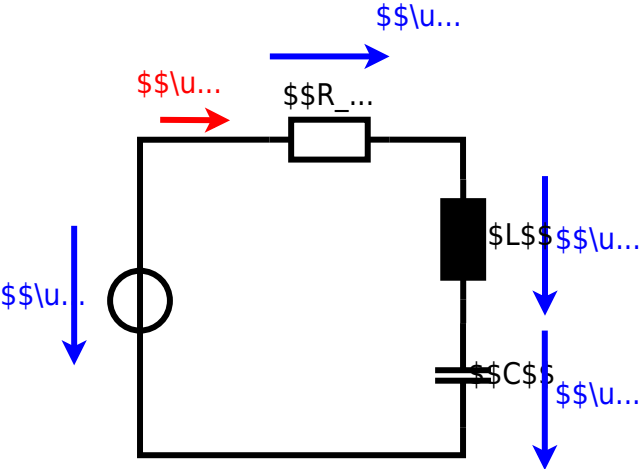

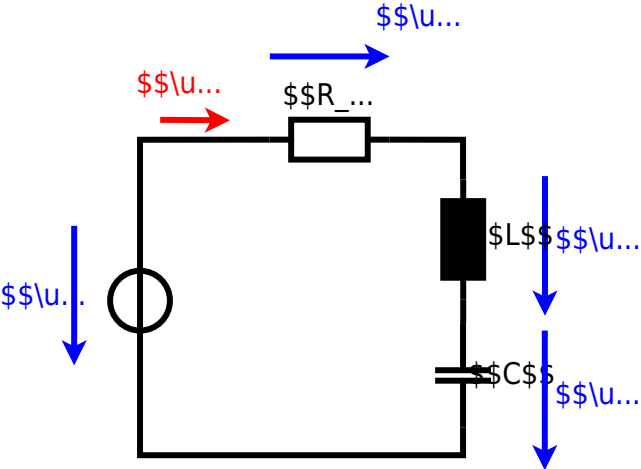

From:

<https://wiki.mexle.te.hs-heilbronn.de/> - **MEXLE Wiki**

Permanent link:

https://wiki.mexle.te.hs-heilbronn.de/electrical_engineering_1/ws2022_exam?rev=1680343787

Last update: **2023/04/01 12:09**

