

Block 01 — Physical Quantities and SI System

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

Block 01 — Physical quantities and SI system	3
<i>Learning objectives</i>	3
<i>90-minute plan</i>	3
<i>Conceptual overview</i>	3
<i>Core content</i>	4
SI base quantities and units	4
Common derived quantities	4
Prefixes	5
Physical equations	5
Quantity Equations	5
normalized Quantity Equations	5
Example for a quantity equation	6
Letters for physical quantities	7
Notation & units	7
<i>Common pitfalls & misconceptions</i>	9
<i>Exercises</i>	9
Quick checks	9
Exercise E1.1 Unit check (quantity equation)	9
Exercise E2.2 Work from lifting (quantity equation)	10
Exercise E3.1 Conversion	10
Exercise E4.2 Dimension	10
Exercise E5.3 Conversion	10
Exercise E6.4 Conversion	11
Longer exercises	11
Exercise E1 Conversions: Battery	11
Exercise E1 Conversions: Speed, Energy, and Power	12
Exercise E2 Conversion: Vacuum Cleaner	12
Exercise E3 Conversions: Video on Prefixes	12
Exercise E1 Conversion: Energy Consumption	13

Exercise E4 Conversions: Battery	13
Exercise E5 Conversions: Speed, Energy, and Power	14
Exercise E6 Conversion: Vacuum Cleaner	14
Exercise E7 Conversions: Video on Prefixes	15
Exercise E8 Conversion: Energy Consumption	15
Exercise E9 Conversion: Energy, Power and Area	15
Exercise E10 Conversion: Energy, Power and Area	16
Embedded resources	16
Mini-assignment / homework (optional)	17

Block 01 — Physical quantities and SI system

Learning objectives

After this 90-minute block, you can

- Use the SI base quantities, units, and symbols correctly; convert between units with prefixes.
- Distinguish base vs. derived quantities; express key EE units (e.g. V , W , F) in SI base units.
- Apply quantity equations and perform unit (dimensional) checks; contrast with normalized (dimensionless) equations.
- Read and use common Latin/Greek letter symbols; distinguish uppercase/lowercase and instantaneous vs. constant quantities.

90-minute plan

1. Warm-up (10 min):
 1. “What is the unit of conductivity? of energy?”
2. Quick prefix quiz; everyday magnitude estimates (mA , kW , μF).
3. Core concepts & derivations (60 min):
 1. SI base set $\rightarrow$ derived units; prefix rules;
4. quantity vs. normalized equations;
5. dimensional checks.
 1. Prefix ladder ($\text{E} \dots \text{a}$) and best-practice rounding/checks.
 2. Symbols & Greek letters in EE1; time-varying vs constant symbols.
6. Practice (15 min): Fast conversions and unit checks (individual $\rightarrow$ pair).
7. Wrap-up (5 min): Summary table; common pitfalls checklist.

Conceptual overview

1. Units are the grammar of engineering and physics.
2. The SI defines seven **base quantities** and units; all other (derived) units are built from these without extra numerical factors. The SI defines seven **base quantities** and units.
3. In EE1 we work strictly in the SI system, combining **numerical value $\times$ unit** and tracking dimensions at every step (e.g., $I = 2 \text{ A}$ means “two times one ampere”).
4. Derived units (e.g., V , W , S) must reduce to base units without hidden factors.
5. **Prefixes** scale units by powers of ten to keep numbers readable. Prefixes compress very large and very small numbers so we can compute and compare safely.
6. **Quantity equations** keep units; **normalized equations** cancel units to yield dimensionless ratios (e.g., efficiency).
7. In EE, symbol choices and letter case matter: U vs. $u(t)$, M (mega) vs. m (milli). We adopt a consistent symbol set (Latin + Greek), and distinguish **constants** (capital letters) from **time functions** (lowercase, e.g., $u(t)$).

8. Finally, we preview the three anchor quantities for the next blocks: **charge** (what moves), **current** (how fast charge moves), and **voltage** (energy per charge). Physics describes **quantities** with a **numerical value × unit** (e.g., $I=2\text{~}\mathrm{A}$).

Core content

SI base quantities and units

- For practical applications of physical laws of nature, **physical quantities** are put into mathematical relationships.
- There are basic quantities based on the SI system of units (French for *Système International d'Unités*), see below.
- In order to determine the basic quantities quantitatively (quantum = Latin for *how big*), **physical units** are defined, e.g. $1\text{~}\mathrm{m}$ for length.
- In electrical engineering, the first three basic quantities (cf. [table 1](#)) are particularly important.
Mass is important for the representation of energy and power.
- Each physical quantity is indicated by a product of **numerical value** and **unit**:
e.g. $I = 2\text{~}\mathrm{A}$
 - This is the short form of $I = 2 \cdot 1\text{~}\mathrm{A}$
 - I is the physical quantity, here: electric current strength
 - $I = 2$ is the numerical value
 - $1\text{~}\mathrm{A}$ is the (measurement) unit, here: $1\text{~}\mathrm{A}$

Base quantity	Name	Unit	Definition
Time	Second	s	Oscillation of ^{133}Cs -Atom
Length	Meter	m	by s and speed of light
el. Current	Ampere	A	by s and elementary charge
Mass	Kilogram	kg	still by kg prototype
Temperature	Kelvin	K	by triple point of water
amount of substance	Mol	mol	via number of ^{12}C nuclides
luminous intensity	Candela	cd	via given radiant intensity

Tab. 1: SI base quantities (SI)

Common derived quantities

- Besides the basic quantities, there are also quantities derived from them, e.g. $[F] = [\text{m}] \cdot [\text{a}] \rightarrow 1\text{~}\mathrm{N} = 1\text{~}\mathrm{kg} \cdot \frac{1\text{~}\mathrm{m}}{1\text{~}\mathrm{s}^2}$.
- SI units should be preferred for calculations. These can be derived from the basic quantities **without a numerical factor**.
example:
 - The pressure unit bar (bar) is an SI unit.
 - BUT: The obsolete pressure unit “Standard atmosphere” ($=1.013\text{~}\mathrm{bar}$) is **not** an SI unit.
- To prevent the numerical value from becoming too large or too small, it is possible to replace a decimal factor with a prefix. These are listed in [table ##](#).

We will see, that a lot of electrical quantities are derived quantities.

Prefixes

- Use prefixes to keep magnitudes practical (see [table 2](#) and [table 3](#)).
- Instead of writing zeroes for like in 0.000000004 ~nC is easier to write 4 ~nC .
- For calculation it is often easier to write $4 \text{ ~nC} = 4 \cdot 10^{-9} \text{ C}$ or the notation 4e-9 C

prefix	prefix symbol	meaning
Yotta	$\text{\rm Y}$	10^{24}
Zetta	$\text{\rm Z}$	10^{21}
Exa	$\text{\rm E}$	10^{18}
Peta	$\text{\rm P}$	10^{15}
Tera	$\text{\rm T}$	10^{12}
Giga	$\text{\rm G}$	10^9
Mega	$\text{\rm M}$	10^6
Kilo	$\text{\rm k}$	10^3
Hecto	$\text{\rm h}$	10^2
Deka	$\text{\rm de}$	10^1

Physical equations

- Physical equations allow a connection of physical quantities.
- There are two types of physical equations to distinguish:
 - Quantity equations (in German: *Größengleichungen*)
 - Normalized quantity equations (also called related quantity equations, in German *normierte Größengleichungen*)

Tab. 2: Prefixes I

prefix	prefix symbol	meaning
Deci	$\text{\rm d}$	10^{-1}
Centi	$\text{\rm c}$	10^{-2}
Milli	$\text{\rm m}$	10^{-3}
Micro	$\text{\rm u}$, μ	10^{-6}
Nano	$\text{\rm n}$	10^{-9}
Piko	$\text{\rm p}$	10^{-12}
Femto	$\text{\rm f}$	10^{-15}
Atto	$\text{\rm a}$	10^{-18}
Zeppto	$\text{\rm z}$	10^{-21}
Yocto	$\text{\rm y}$	10^{-24}

Tab. 3: Prefixes II

Quantity Equations

The vast majority of physical equations result in a physical unit that does not equal \$1\$.

Example: Force
 $F = m \cdot a$
with $[F] = 1 \text{ ~kg} \cdot \frac{\text{m}}{\text{s}^2}$

- A unit check

normalized Quantity Equations

In normalized quantity equations, the measured value or calculated value of a quantity equation is divided by a reference value. This results in a dimensionless quantity relative to the reference value.

Example: The

- should always be performed for quantity equations
- Quantity equations should generally be preferred

efficiency $\eta = \frac{P_{\text{O}}}{P_{\text{I}}}$ is given as quotient between the outgoing power P_{O} and the incoming power P_{I} .

As a reference the following values are often used:

- Nominal values (maximum permissible value in continuous operation) or
- Maximum values (maximum value achievable in the short term)

For normalized quantity equations, the units should **always** cancel out.

Example for a quantity equation

Let a body with the mass $m = 100 \text{ kg}$ be given. The body is lifted by the height $s = 2 \text{ m}$.

What is the value of the needed work?

physical equation:

Work = Force $\cdot$ displacement

$W = F \cdot s \quad \quad \quad$; where $F = m \cdot g$

$W = m \cdot g \cdot s \quad \quad \quad$ where $m = 100 \sim \{\rm kg\}$, $s = 2 \sim m$ and

$g = 9.81 \sim \frac{\{\rm m\}}{\{\rm s\}^2}$

$W = 100 \sim \rm kg \cdot 9.81 \sim \frac{\{\rm m\}}{\{\rm s\}^2} \cdot 2 \sim \{\rm m\} \cdot$

$W = 100 \cdot 9.81 \cdot 2 \cdot \frac{\{\rm m\}}{\{\rm s\}^2} \cdot \{\rm kg\} \cdot \frac{\{\rm m\}}{\{\rm s\}^2}$

$\cdot \{\rm m\}$

$W = 1962 \cdot \frac{\{\rm kg\}}{\{\rm s\}^2} \cdot \{\rm m\}$

$W = 1962 \sim \{\rm Nm\} = 1962 \sim \{\rm J\}$

Letters for physical quantities

Latin/Greek letters are reused across physics.

In physics and electrical engineering, the letters for physical quantities are often close to the English term.

Thus explains C for **C**apacity, Q for **Q**uantity and ϵ_0 for the **E**lectrical Field Constant. But, maybe you already know that C is used for the thermal capacity as well as for the electrical capacity. The Latin alphabet does not have enough letters to avoid conflicts for the scope of physics. For this reason, Greek letters are used for various physical quantities (see [table 4](#)).

Especially in electrical engineering, **upper/lower case letters** are used to distinguish between

- a constant (time-independent) quantity, e.g. the period T
- or a time-dependent quantity, e.g. the instantaneous voltage $u(t)$
- EE relies on case and context (e.g., U vs. $u(t)$). Time-varying quantities often use lowercase, constants uppercase.

Notation & units

The course consistently uses the following symbols, units, and typical values:

Symbol	Quantity	SI unit	name of the unit	Typical values
A	Current	A	Ampere	$I = 1 \sim A$
B	Magnetic flux density	T	Tesla	$B = 1 \sim T$
C	Capacity	F	Farad	$C = 1 \sim F$
E	Electric field strength	V/m	Volt per meter	$E = 1 \sim V/m$
F	Force	N	Newton	$F = 1 \sim N$
G	Gravitational constant	$N \cdot m^2/kg^2$	Newton square meter per kilogram square	$G = 6.67 \cdot 10^{-11} \sim N \cdot m^2/kg^2$
H	Magnetic field strength	A/m	Ampere per meter	$H = 1 \sim A/m$
I	Current	A	Ampere	$I = 1 \sim A$
K	Specific conductivity	S/m	Siemens per meter	$K = 1 \sim S/m$
L	Inductance	H	Henry	$L = 1 \sim H$
M	Magnetic field constant	N/A	Newton per Ampere	$M = 1.256 \cdot 10^{-6} \sim N/A$
N	Force	N	Newton	$F = 1 \sim N$
O	Optical density	-	-	-
P	Power	W	Watt	$P = 1 \sim W$
Q	Quantity	-	-	-
R	Resistance	Ω	Ohm	$R = 1 \sim \Omega$
S	Specific conductivity	S/m	Siemens per meter	$K = 1 \sim S/m$
T	Temperature	K	Kelvin	$T = 300 \sim K$
U	Voltage	V	Volt	$U = 1 \sim V$
V	Voltage	V	Volt	$U = 1 \sim V$
W	Work	J	Joule	$W = 1 \sim J$
X	Capacitance	F	Farad	$C = 1 \sim F$
Y	Admittance	S	Siemens	$Y = 1 \sim S$
Z	Impedance	Ω	Ohm	$Z = 1 \sim \Omega$
α	Angle	rad	Radian	$\alpha = 1 \sim rad$
β	Angle	rad	Radian	$\beta = 1 \sim rad$
γ	Angle	rad	Radian	$\gamma = 1 \sim rad$
δ	Small deviation	rad	Radian	$\delta = 1 \sim rad$
ϵ	Electrical field constant	F/m	Farad per meter	$\epsilon = 8.85 \cdot 10^{-12} \sim F/m$
ζ	Math function	-	-	-
η	Efficiency	-	-	-
θ	Temperature	K	Kelvin	$T = 300 \sim K$
ι	-	-	-	-
κ	Specific conductivity	S/m	Siemens per meter	$K = 1 \sim S/m$
λ	Wavelength	m	Meter	$\lambda = 1 \sim m$
μ	Magnetic field constant	N/A	Newton per Ampere	$M = 1.256 \cdot 10^{-6} \sim N/A$
ν	Frequency	Hz	Hertz	$\nu = 1 \sim Hz$
ξ	-	-	-	-
$\omicron$	-	-	-	-

Symbol	Quantity	SI unit	name of the unit	Typical values	Uppercase letters	Lowercase letters	Name	Application
$\text{\$q\$}$	Electric charge	$\text{\$}\text{\rm C}\text{\$}$	Coulomb	10^{-19} $\text{\rm C}$ (electron) to $\text{\rm mC}$	$\text{\$}\Pi\text{\$}$	$\text{\$\pi\$}$	Pi	math. product operator, math. constant
$\text{\$I\$}$	Electric current	$\text{\$}\text{\rm A}\text{\$}$	Ampere	$\text{\rm }\mu\text{\rm A}$ (sensors) to $\text{\rm kA}$ (lightning)	$\text{\$R\$}$	$\text{\$\rho\$}$, $\text{\$\varrho\$}$	Rho	specific resistivity
$\text{\$U\$}$	Voltage (potential difference)	$\text{\$}\text{\rm V}\text{\$}$	Volt	$\text{\rm }\mu\text{\rm V}$ (noise) to $\text{\rm MV}$ (transmission lines)	$\text{\$\Sigma\$}$	$\text{\$\sigma\$}$	Sigma	math. sum operator, alternatively for specific conductivity
$\text{\$\varphi\$}$	Electric potential	$\text{\$}\text{\rm V}\text{\$}$	Volt	—	$\text{\$T\$}$	$\text{\$\tau\$}$	Tau	time constant
$\text{\$P\$}$	Power	$\text{\$}\text{\rm W}\text{\$}$	Watt	$\text{\rm mW}$ (electronics) to $\text{\rm MW}$ (machines)	$\text{\$\Upsilon\$}$	$\text{\$\epsilon\$}$	Upsilon	-
$\text{\$W\$}$	Energy	$\text{\$}\text{\rm J}\text{\$}$	Joule	$\text{\rm }\mu\text{\rm J}$ (capacitors) to $\text{\rm MJ}$ (batteries)	$\text{\$\Phi\$}$	$\text{\$\phi\$}$, $\text{\$\varphi\$}$	Phi	magnetic flux, angle, potential
$\text{\$R\$}$	Resistance	$\text{\$}\text{\rm }\Omega\text{\$}$	Ohm	$\text{\rm m}\Omega$ to $\text{\rm M}\Omega$	$\text{\$X\$}$	$\text{\$\chi\$}$	Chi	-
$\text{\$G\$}$	Conductance	$\text{\$}\text{\rm S}\text{\$}$	Siemens	$\text{\rm }\mu\text{\rm S}$ to $\text{\rm S}$	$\text{\$\Psi\$}$	$\text{\$\psi\$}$	Psi	linked magnetic flux
$\text{\$\rho\$}$	Resistivity	$\text{\rm }\Omega\text{\rm }\cdot\text{\rm m}$	—	$1.7 \cdot 10^{-8}$ $\text{\rm }\Omega\text{\rm m}$ (Cu)	$\text{\$\Omega\$}$	$\text{\$\omega\$}$	Omega	unit of resistance, angular frequency
$\text{\$\sigma\$}$	Conductivity	$\text{\rm S/m}$	—	$5.8 \cdot 10^7$ $\text{\rm S/m}$ (Cu)	Tab. 4: greek letters			
$\text{\$C\$}$	Capacitance	$\text{\$}\text{\rm F}\text{\$}$	Farad	$\text{\rm pF}$ (ceramic) to $\text{\rm F}$ (supercaps)				
$\text{\$L\$}$	Inductance	$\text{\$}\text{\rm H}\text{\$}$	Henry	$\text{\rm }\mu\text{\rm H}$ to $\text{\rm H}$				
$\text{\$E\$}$	Electric field strength	$\text{\rm V/m}$	—	1 $\text{\rm V/m}$ to $\text{\rm MV/m}$ (breakdown)				
$\text{\$D\$}$	Electric flux density	$\text{\rm C/m}^2$	—	—				
$\text{\$B\$}$	Magnetic flux density	$\text{\$}\text{\rm T}\text{\$}$	Tesla	$\text{\rm }\mu\text{\rm T}$ (Earth) to several $\text{\rm T}$ (MRI)				
$\text{\$H\$}$	Magnetic field strength	$\text{\rm A/m}$	—	—				
$\text{\$\Phi\$}$	Magnetic flux	$\text{\rm Wb}$	Weber	$\text{\rm }\mu\text{\rm Wb}$ to $\text{\rm mWb}$				

Symbol	Quantity	SI unit	name of the unit	Typical values
θ	magnetic voltage (Magnetomotive force)	$\text{A} \cdot \text{turn}$	—	—
R	Reluctance	$\frac{\text{A}}{\text{Wb}}$	—	—

Tab. 5: Course-wide notation and units

Common pitfalls & misconceptions

- **Case matters:** M (mega, 10^6) vs. m (milli, 10^{-3});
- **Micro symbol:** use μ (or u only when typing constraints exist);
- **usage of prefixes** never stack prefixes (no “ $\text{m}\mu\text{F}$ ”).
- **Mixed units:** keep SI consistently; avoid mixing hours / Wh inside SI derivations.
- **Units vs. variables:** don’t confuse W (work) with W (Watt = unit of power P = work per second).
Don’t confuse C (capacity = charge per voltage) with C (Coulomb = unit of charge Q).
- **Units vs. prefixes:** don’t confuse mN (Millinewton) with Nm (Newton meter).
- **Normalized vs. quantity equations:** dimensionless ratios should cancel units; if not, something’s wrong.

Exercises

Quick checks

Exercise E1.1 Unit check (quantity equation)

Show that $P=U \cdot I$ has unit watt. (Better to be calculated after reading Block02)

Result

1. $[U]=\text{V}=\text{kg}\cdot\text{m}^2\cdot\text{s}^{-3}\cdot\text{A}^{-1}$,
 $[I]=\text{A}$.
 2. $[P]=[U][I]=\text{kg}\cdot\text{m}^2\cdot\text{s}^{-3}=\text{W}$.

Exercise E2.2 Work from lifting (quantity equation)

How much energy is needed to lift 100 kg for 2 meters?

Result

1. $W = mgs$ with $m = 100 \text{ kg}$, $g = 9.81 \text{ m/s}^2$, $s = 2 \text{ m}$
2. $W = 100 \cdot 9.81 \cdot 2 \text{ Nm} = 1962 \text{ J}$

Exercise E3.1 Conversion

Convert $47 \text{ k}\Omega$ to $\text{M}\Omega$ and Ω .

Result

$$47 \text{ k}\Omega = 0.047 \text{ M}\Omega = 47,000 \Omega.$$

Exercise E4.2 Dimension

Is $\eta = \frac{P_{\text{O}}}{P_{\text{I}}}$ dimensionless?

Result

Yes. Units cancel (W/W); normalized equation.

Exercise E5.3 Conversion

Which is larger: 5 mA or $4500\text{ }\mu\text{A}$?

Result

$5\text{ mA} = 5000\text{ }\mu\text{A}$, so 5 mA is larger.

Exercise E6.4 Conversion

True/False: $1\text{ V} = 1\text{ Nm/As}$.

Result

True (from $W = U \cdot Q$).

Longer exercises

Exercise E1 Conversions: Battery

2. How many minutes could a battery with 10 kWh supply power to a device that requires 100 W of power for thermal time?

Result

$t = 200'000\text{ min}$

There are additional losses:

$W = 10\text{ kWh} = 10'000\text{ Wh}$ $t = \frac{W}{P} = \frac{10'000\text{ Wh}}{100\text{ W}} = 100\text{ h} = 6000\text{ min}$

provides, this leads to internal losses

- The internal resistance of the battery depends on the state of charge (SoC) of the battery.
- The wires also add additional losses to the system.

Exercise E1 Conversions: Speed, Energy, and Power

2. The energy of a 600 g battery with a voltage of 18 V is 72 Wh. How much energy does it provide in J? (1 Wh = 3600 J)
3. A vehicle speed of 80 km/h is in m/s?
4. A vehicle speed of 80 km/h is in m/s?

Solution

Fast Solution:

$$\begin{aligned} 72 \text{ Wh} &= 72 \cdot 3600 \text{ J} = 259200 \text{ J} \\ 80 \text{ km/h} &= 80 \cdot \frac{1000 \text{ m}}{3600 \text{ s}} = 22.22 \text{ m/s} \end{aligned}$$

$$\begin{aligned} 72 \text{ Wh} &= 72 \cdot 3600 \text{ J} = 259200 \text{ J} \\ 80 \text{ km/h} &= 80 \cdot \frac{1000 \text{ m}}{3600 \text{ s}} = 22.22 \text{ m/s} \end{aligned}$$

Exercise E2 Conversion: Vacuum Cleaner

Your 18 V vacuum cleaner is equipped with a 4.0 Ah battery, it runs 15 minutes.

How much electrical power is consumed by the motor during this time on average?

Solution:

$$P = 288 \text{ W}$$

$$\begin{aligned} W &= 18 \text{ V} \cdot 4.0 \text{ Ah} = 72 \text{ Wh} \\ 15 \text{ min} &= 0.25 \text{ h} \\ P &= \frac{W}{t} = \frac{72 \text{ Wh}}{0.25 \text{ h}} = 288 \text{ W} \end{aligned}$$

Exercise E3 Conversions: Video on Prefixes



Exercise E1 Conversion: Energy Consumption

Convert the following values step by step:

Result

How much energy does an average household consume per day when consuming an average power of \$ 500~{\rm W}\$?

How many chocolate bars (\$2'000~{\rm kJ}\$ each) does this correspond to?

$$22~{\rm chocolate~bars}$$

Solution

$$\begin{aligned} W &= 500~{\rm W} \cdot 24~{\rm h} = 12000~{\rm Wh} = \\ 43'200'000~{\rm Js} &= 43'200~{\rm kWs} \quad \&= 43'200~{\rm kJ} \quad \text{Or: } W \\ &= 0.5~{\rm kW} \cdot 24~{\rm h} = 12~{\rm kWh} = 43'200~{\rm kWs} \quad \&= \\ 43'200~{\rm kJ} \quad \&= \frac{43'200~{\rm kJ}}{2'000~{\rm kJ}} = \\ 21.6~{\rm chocolate~bars} \end{aligned}$$

Exercise E4 Conversions: Battery

2. How many minutes could a battery with \$10~{\rm W}\$ be supplied by provided energy power for the calculated time?

Result

$$t = 200'000~{\rm min}$$

There are additional losses:

- The battery is a solid-state battery depending on the current the battery provides. This leads to an internal resistance R_{int} of $3.33 \times 10^{-3} \Omega$. The internal resistance of the battery depends on the state of charge (SoC) of the battery.
- The wires also add additional losses to the system.

Exercise E5 Conversions: Speed, Energy, and Power

1. A vehicle speed of $80.00 \frac{\text{km}}{\text{h}}$ in $\frac{\text{m}}{\text{s}}$

Solution

[illegible]

Exercise E6 Conversion: Vacuum Cleaner


Your \$18~{\rm V}\$ vacuum cleaner is equipped with a \$4.0~{\rm Ah}\$ battery, it runs **Result**~{\rm minutes}\$.

How much electrical power is consumed by the motor during this time on average?

Solution

$$\begin{aligned} W &= 18 \sim \{\mathrm{V}\} \cdot 4.0 \sim \{\mathrm{Ah}\} = 72 \sim \{\mathrm{Wh}\} \\ t &= 15 \sim \{\mathrm{min}\} = 0.25 \sim \{\mathrm{h}\} \\ P &= \frac{W}{t} = \frac{72 \sim \{\mathrm{Wh}\}}{0.25 \sim \{\mathrm{h}\}} = 288 \sim \{\mathrm{W}\} \end{aligned}$$

Exercise E7 Conversions: Video on Prefixes

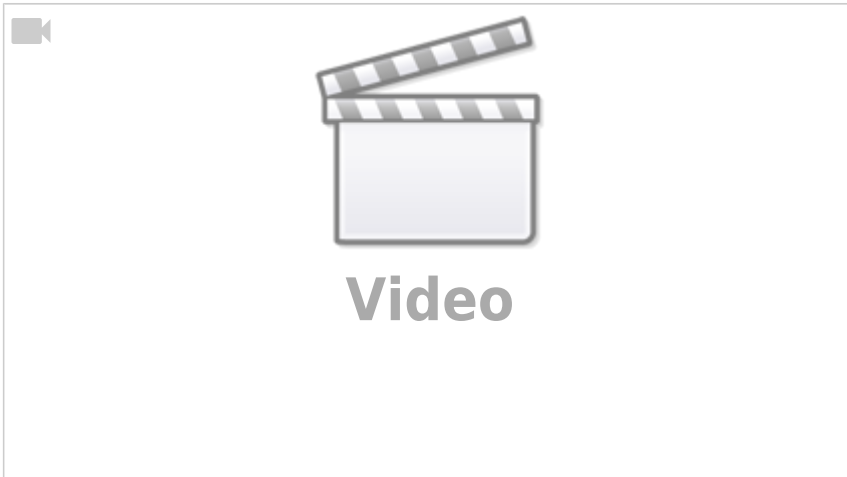

Exercise E8 Conversion: Energy Consumption

Convert the following values step by step:

Result

How much energy does an average household consume per day when consuming an average power of 500 W ?

How many chocolate bars ($2'000 \text{ kJ}$ each) does this correspond to?

$$22 \text{ chocolate bars}$$

Solution

$$\begin{aligned} W &= 500 \text{ W} \cdot 24 \text{ h} = 12000 \text{ Wh} = \\ &= 43'200'000 \text{ Ws} = 43'200 \text{ kWs} \quad \&= 43'200 \text{ kJ} \quad \text{Or: } W \\ &= 0.5 \text{ kW} \cdot 24 \text{ h} = 12 \text{ kWh} = 43'200 \text{ kWs} \quad \&= \\ &= 43'200 \text{ kJ} \quad \text{ } n_{\text{bars}} = \frac{43'200 \text{ kJ}}{2'000 \text{ kJ}} = \\ &= 21.6 \text{ chocolate bars} \end{aligned}$$

Exercise E9 Conversion: Energy, Power and Area

2. The car battery is a lead-acid battery with a capacity of 60 Ah and a nominal voltage of 12 V . The car has an average power consumption of 100 W .

Result: The car has an usable battery capacity of 60 kWh . Solar panels produces per 1 m^2 in average in December 0.2 kWh/m^2 . The car is driven 50 km per day. The size of a distinct solar module with 460 W_p (Watt peak) is $1.9 \text{ m} \times 1.1 \text{ m}$.

Solution:
$$A = \frac{100 \text{ W} \cdot 60 \text{ Ah}}{0.2 \text{ kWh/m}^2} = 300 \text{ m}^2$$

$$A = 1.9 \text{ m} \times 1.1 \text{ m} = 2.09 \text{ m}^2$$

.. What is the average power consumption of the car per day?

Solution

$$\begin{aligned} A &= \frac{100 \text{ panels} \cdot 40 \text{ panels}}{20 \text{ panels}} = 200 \text{ panels} \\ A &= \frac{100 \text{ panels} \cdot 40 \text{ panels}}{20 \text{ panels}} = 200 \text{ panels} \\ A &= \frac{100 \text{ panels} \cdot 40 \text{ panels}}{20 \text{ panels}} = 200 \text{ panels} \\ A &= \frac{100 \text{ panels} \cdot 40 \text{ panels}}{20 \text{ panels}} = 200 \text{ panels} \\ A &= \frac{100 \text{ panels} \cdot 40 \text{ panels}}{20 \text{ panels}} = 200 \text{ panels} \\ A &= \frac{100 \text{ panels} \cdot 40 \text{ panels}}{20 \text{ panels}} = 200 \text{ panels} \\ A &= \frac{100 \text{ panels} \cdot 40 \text{ panels}}{20 \text{ panels}} = 200 \text{ panels} \\ A &= \frac{100 \text{ panels} \cdot 40 \text{ panels}}{20 \text{ panels}} = 200 \text{ panels} \\ A &= \frac{100 \text{ panels} \cdot 40 \text{ panels}}{20 \text{ panels}} = 200 \text{ panels} \\ A &= \frac{100 \text{ panels} \cdot 40 \text{ panels}}{20 \text{ panels}} = 200 \text{ panels} \end{aligned}$$

Exercise E10 Conversion: Energy, Power and Area

1. What is the average power consumption of the car per day? The car is driven \$50 \text{ km}\$ per day. The size of a distinct solar module with \$460 \text{ W}_p\$ (Watt peak) is \$1.9 \text{ m} \times 1.1 \text{ m}\$.

$$A = \frac{100 \text{ panels} \cdot 40 \text{ panels}}{20 \text{ panels}} = 200 \text{ panels}$$

2. What is the average power consumption of the car per day?



$$\begin{aligned} A &= \frac{100 \text{ panels} \cdot 40 \text{ panels}}{20 \text{ panels}} = 200 \text{ panels} \\ A &= \frac{100 \text{ panels} \cdot 40 \text{ panels}}{20 \text{ panels}} = 200 \text{ panels} \\ A &= \frac{100 \text{ panels} \cdot 40 \text{ panels}}{20 \text{ panels}} = 200 \text{ panels} \\ A &= \frac{100 \text{ panels} \cdot 40 \text{ panels}}{20 \text{ panels}} = 200 \text{ panels} \\ A &= \frac{100 \text{ panels} \cdot 40 \text{ panels}}{20 \text{ panels}} = 200 \text{ panels} \\ A &= \frac{100 \text{ panels} \cdot 40 \text{ panels}}{20 \text{ panels}} = 200 \text{ panels} \\ A &= \frac{100 \text{ panels} \cdot 40 \text{ panels}}{20 \text{ panels}} = 200 \text{ panels} \\ A &= \frac{100 \text{ panels} \cdot 40 \text{ panels}}{20 \text{ panels}} = 200 \text{ panels} \\ A &= \frac{100 \text{ panels} \cdot 40 \text{ panels}}{20 \text{ panels}} = 200 \text{ panels} \\ A &= \frac{100 \text{ panels} \cdot 40 \text{ panels}}{20 \text{ panels}} = 200 \text{ panels} \end{aligned}$$

$$\begin{aligned} \{W\} &= \{16 \text{ kWh}\} \over \{100 \text{ km}\} = 0.16 \\ \{W\} &= \{16 \text{ kWh}\} \over \{100 \text{ km}\} = 0.16 \\ \{W\} &= \{16 \text{ kWh}\} \over \{100 \text{ km}\} = 0.16 \\ \{W\} &= \{16 \text{ kWh}\} \over \{100 \text{ km}\} = 0.16 \\ \{W\} &= \{16 \text{ kWh}\} \over \{100 \text{ km}\} = 0.16 \\ \{W\} &= \{16 \text{ kWh}\} \over \{100 \text{ km}\} = 0.16 \\ \{W\} &= \{16 \text{ kWh}\} \over \{100 \text{ km}\} = 0.16 \\ \{W\} &= \{16 \text{ kWh}\} \over \{100 \text{ km}\} = 0.16 \\ \{W\} &= \{16 \text{ kWh}\} \over \{100 \text{ km}\} = 0.16 \\ \{W\} &= \{16 \text{ kWh}\} \over \{100 \text{ km}\} = 0.16 \end{aligned}$$


Embedded resources

A nice 10-minute intro into some of the main topics of this chapter

Short presentation of the SI units

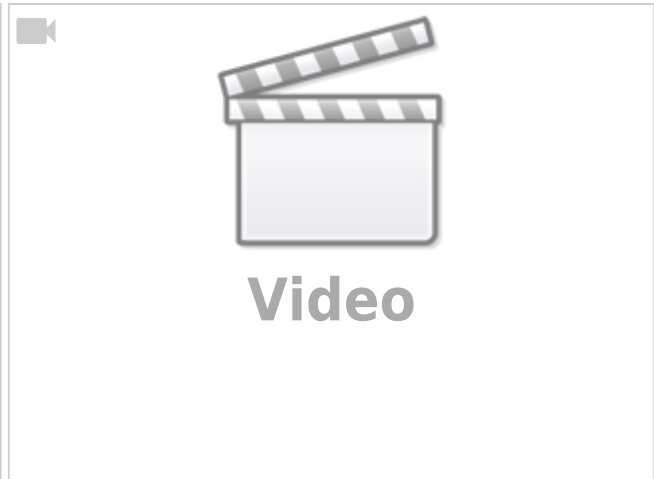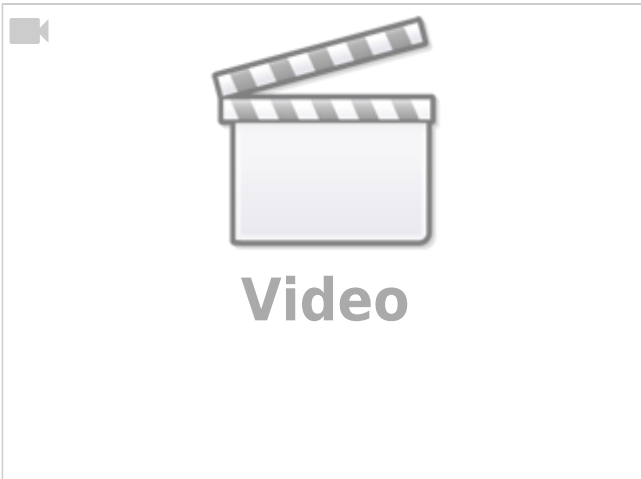

Orders of magnitude and why prefixes matter.

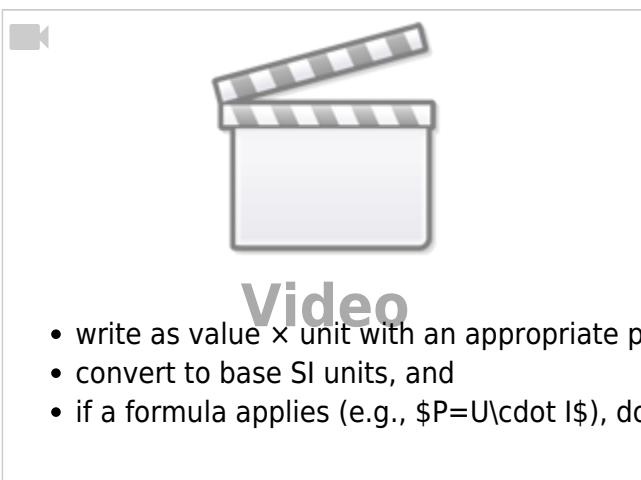

Mini-assignment / homework (optional)

List 10 everyday EE-relevant quantities (e.g., USB current, phone battery energy, LED forward voltage).
For each:

- write as value × unit with an appropriate prefix,
- convert to base SI units, and
- if a formula applies (e.g., $P=U \cdot I$), do a unit check.

From:

<https://wiki.mexle.te.hs-heilbronn.de/> - MEXLE Wiki

Permanent link:

https://wiki.mexle.te.hs-heilbronn.de/electrical_engineering_and_electronics_1/block01?rev=1759095379

Last update: 2025/09/28 23:36

