

Exam Winter Semester 2022

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

Exam Winter Semester 2022	2
Additional permitted Aids	2
Hits	2
Only EEE1-relevant Part	2
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	2
Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	3
Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	3
Exercise E4 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	5
Full Exam	9
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	9
Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	10
Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	10
Exercise E4 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	12
Exercise E5 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022)	16
Exercise E6 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	17
Exercise E7 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	17
Exercise E8 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	18

Exam Winter Semester 2022

Additional permitted Aids

- non-programmable calculator,
- formulary (2 DIN A4 pages)

Hits

- The duration of the exam is 60 min.
- Attempts to cheat will lead to exclusion and failure of the exam.
- Withdrawal is no longer possible after these exam has been handed out.
- Please write down intermediate calculations and results on the assignment sheet. (when more space is needed also on the reverse side. In this case: Mark it clearly).
- Always use units in the calculation.
- Use a document-proof, non-red pen.

Only EEE1-relevant Part

This part is only for about 25 minutes !

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

2. The heating element made of solid nichrome wire with a cross-section of 1.80 mm^2 and an electric resistance of $R = 0.33 \text{ } \Omega$ is used in a laboratory. The power dissipation (= heat flow) of $P = 40 \text{ W}$ is necessary. Calculate the current I needed for operation.

The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6} \text{ } \Omega \text{ m}$.

The heating element is 3 m long and has a diameter of 3.57 mm .

Calculate the resistance R of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \Rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \text{with } A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \quad \Rightarrow \quad R = \rho \cdot \frac{4 \cdot l}{\pi d^2} \\ &= 1.10 \cdot 10^{-6} \text{ } \Omega \text{ m} \cdot \frac{4 \cdot 3 \text{ m}}{\pi (3.57 \cdot 10^{-3} \text{ m})^2} \end{aligned}$$

Exercise E2 Temperature-dependent Resistance

(written test, approx. 6 % of a 60-minute written test, WS2022)

[illegible]
$$R_s = 6.5 \times 10^{-4} \Omega$$

The positive transfer resistance P_{end} is a part of the circuit and generates heat. Therefore, a solution is to use a heat exchanger to cool the refrigeration system.

Therefore, with constant $\$U\$$ and increasing $\$R\$$ the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) \quad \&\amp; \quad \Delta T = T_{\text{end}} - T_{\text{start}} \quad \&\& \quad R = 10 \sim \text{m}\{\text{k}\} \cdot \Omega \cdot \left((1 + 0.01 \sim \frac{1}{\text{m}\{\text{K}\}}) \cdot (-40 \sim \text{m}\{\text{C}\} - 25 \sim \text{m}\{\text{C}\}) + 71 \cdot 10^{-6} \sim \frac{1}{\text{m}\{\text{K}\}^2} \cdot (-40 \sim \text{m}\{\text{C}\} - 25 \sim \text{m}\{\text{C}\})^2 \right)$$

Exercise E3 Pure Resistor Network Simplification


(written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall include \$B₁ use 200 Cal. Code Reg. 88242(a)(1) State of California and the \$B₁ between \$B₁ and \$B₁.

Solution

$$R \approx 132.8 \sim \Omega$$

Now a wye-delta transformation is necessary.

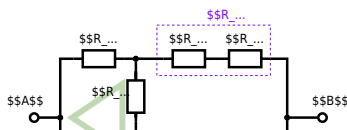


Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:
$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \, \Omega + (33.33 \, \Omega + 400 \, \Omega) \parallel (33.33 \, \Omega + 100 \, \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

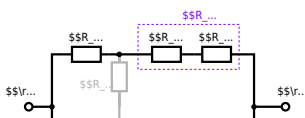


The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \, \Omega + 200 \, \Omega + 200 \, \Omega) \parallel (100 \, \Omega + 100 \, \Omega) \parallel R_{\text{eq}} = (500 \, \Omega) \parallel (200 \, \Omega) \parallel R_{\text{eq}} = \frac{500 \, \Omega \cdot 200 \, \Omega}{500 \, \Omega + 200 \, \Omega} \parallel R_{\text{eq}}$$

Exercise E4 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.
Result

$$U_{\text{s}} = U_{\text{AB}} = 4.5 \, \text{V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \, \Omega$$

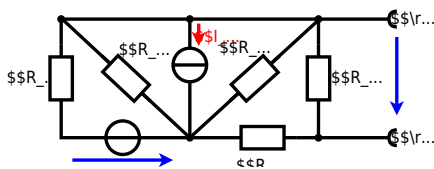


Calculate the internal resistance R_i and the source voltage U_s of an equivalent linear voltage source on the connectors A and B.

$R_1 = 5.0 \, \Omega$, $U_2 = 6.0 \, \text{V}$, $R_3 = 10 \, \Omega$, $I_4 = 4.2 \, \text{A}$, $R_5 = 10 \, \Omega$, $R_6 = 7.5 \, \Omega$, $R_7 = 15 \, \Omega$


Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

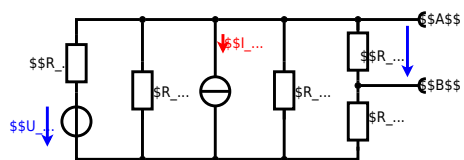

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

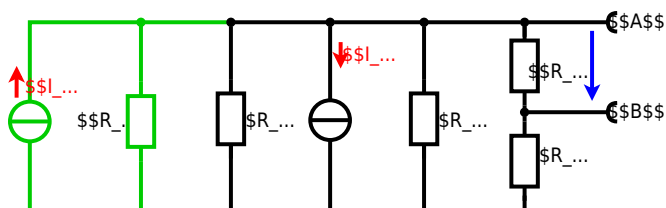

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_{24} and I_{13} :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_{24} - I_{13} = \frac{U_{24}}{R_1} - I_{13}$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{135}$$

$$U_{24} = U_{23} \cdot \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} = (U_{23} - I_4 \cdot R_1) \cdot \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5}$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} = (U_{23} - I_4 \cdot R_1) \cdot \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0\Omega$, so a short-circuit):

$$R_{AB} = R_7 \parallel (R_6 + R_1 \parallel R_3 \parallel R_5)$$

with $R_1 \parallel R_3 \parallel R_5 = 5\Omega \parallel 10\Omega \parallel 10\Omega = 5\Omega \parallel 5\Omega = 2.5\Omega$:

$$U_{AB} = \frac{6.0\text{ V}}{5.0\Omega} - 4.2\Omega \cdot \frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega} \quad R_{AB} = 15\Omega \parallel (7.5\Omega + 2.5\Omega)$$

Full Exam

These is the full exam

Full exam

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

The heating element made of Nichrome wire with a cross-section of 1.80 mm^2 and a length of 3 m is used for heating elements. A power dissipation (= heat flow) of $P=40\text{ W}$ is necessary. Calculate the current I needed to operate for heating elements. The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6}\Omega\text{ m}$. The heating element is 3 m long and has a diameter of 3.57 mm . Calculate the resistance R of the heating element.

Solution

$$P = U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40\text{ W}}{0.33\Omega}}$$

$$R = \rho \cdot \frac{l}{A} \quad | \quad \text{with } A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \quad R = \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad R = 1.10 \cdot 10^{-6}\Omega\text{ m} \cdot \frac{4 \cdot 3\text{ m}}{(3.57\text{ mm})^2 \cdot \pi}$$

$$3 \sim \mathrm{m}} \} \} (3.57 \cdot 10^{-3} \sim \mathrm{m})^2 \cdot \pi \} \&\& \\\end{align*}$$

[electrical_engineering_and_electronics:task_rj0r6j4apumukrj6_with_calculation](#)
[resistivity, power, exam ee1 ws2022](#)

Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

A. The diagram explains a thermistor's resistance in a refrigeration system. The thermistor's resistance is given by the formula $R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$ for ΔT in $^{\circ}\mathrm{C}$. Its temperature coefficients are: $\alpha = 0.01 \sim \frac{1}{\mathrm{K}}$ and $\beta = 71 \cdot 10^{-6} \sim \frac{1}{\mathrm{K}^2}$.

Result
The temperature inside the refrigeration system can reach down to $-40 \sim ^{\circ}\mathrm{C}$.

Result
The temperature inside the refrigeration system can reach down to $-40 \sim ^{\circ}\mathrm{C}$.

Result
Calculate the resistance of the thermistor at $-40 \sim ^{\circ}\mathrm{C}$.

Result
The power of the resistor $P = U^2 / R$ and the heat flow $\dot{Q} = P$ is $\dot{Q} = \frac{U^2}{R}$. The heat flow $\dot{Q}$ is the power of the resistor. The heat flow $\dot{Q}$ is the power of the resistor.

Result
Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$\begin{aligned} R &= R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) \quad | \text{ with } \Delta T = T_{\mathrm{end}} - T_{\mathrm{start}} \\ R &= 10 \sim \mathrm{k}\Omega \cdot \left(1 + 0.01 \sim \frac{1}{\mathrm{K}} \cdot (-40 \sim ^{\circ}\mathrm{C} - 25 \sim ^{\circ}\mathrm{C}) + 71 \cdot 10^{-6} \sim \frac{1}{\mathrm{K}^2} \cdot (-40 \sim ^{\circ}\mathrm{C} - 25 \sim ^{\circ}\mathrm{C})^2 \right) \end{aligned}$$

[electrical_engineering_and_electronics:task_70jg4yzznocarsq_with_calculation](#)
[temperature dependent resistance, power, heat, exam ee1 ws2022](#)


Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved: Calculate the equivalent resistance R_{eq} and the power P in A and B .

Solution

$$\begin{aligned} R_{\mathrm{eq}} &= 132.8 \sim \Omega \end{aligned}$$

Now a wye-delta transformation is necessary.

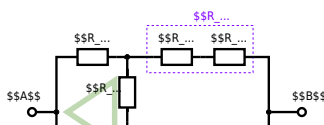

Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \, \Omega + (33.33 \, \Omega + 400 \, \Omega) \parallel (33.33 \, \Omega + 100 \, \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B.

Solution

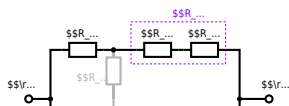

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \, \Omega + 200 \, \Omega + 200 \, \Omega) \parallel (100 \, \Omega + 100 \, \Omega) \parallel R_{\text{eq}} = (500 \, \Omega) \parallel (200 \, \Omega) \parallel R_{\text{eq}} = \left\{ \frac{500 \, \Omega \cdot 200 \, \Omega}{500 \, \Omega + 200 \, \Omega} \right\} \parallel R_{\text{eq}}$$


[electrical_engineering_and_electronics:task_x357drkaqv84jnsj_with_calculation](#)
network simplification, exam ee1 ws2022

Exercise E4 Equivalent linear Source

(written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.
Result


$$U_{\text{s}} = U_{\text{AB}} = 4.5 \, \text{V} \parallel R_{\text{i}} = R_{\text{AB}} = 6 \, \Omega$$

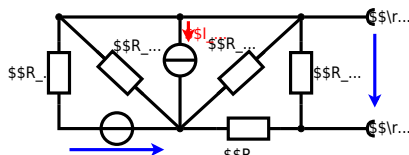


Calculated the internal resistance R_{int} and the source voltage U_{oc} of an equivalent linear voltage source on the connectors A and B . $\begin{aligned} R_1 &= 5.0 \, \Omega, \quad U_2 = 6.0 \, \text{V}, \quad R_3 = 10 \, \Omega, \quad I_4 = 4.2 \, \text{A}, \\ R_5 &= 10 \, \Omega, \quad R_6 = 7.5 \, \Omega, \quad R_7 = 15 \, \Omega \end{aligned}$
 Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

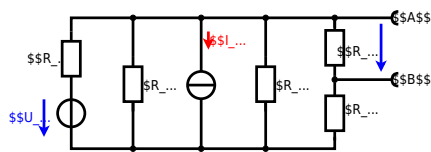

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

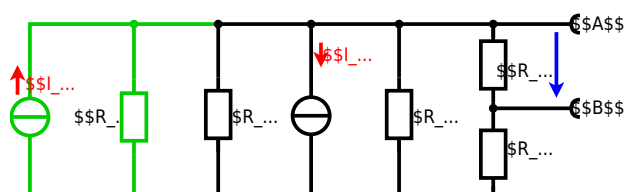

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in

parallel, like also I_2 and I_4 :
$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \left\{ \frac{U_2}{R_1} \right\} - I_4$$
 The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:
$$U_{24} = R_{135} \cdot I_{24} = \left(\frac{U_2}{R_1} - I_4 \right) \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:
$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} = \left(\frac{U_2}{R_1} - I_4 \right) \cdot \frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0\Omega$, so a short-circuit):
$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5\Omega || 10\Omega || 10\Omega = 5\Omega || 5\Omega = 2.5\Omega$:

$$U_{AB} = \left(\frac{6.0\text{V}}{5.0\Omega} - 4.2\Omega \right) \cdot \frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega} || R_{AB} = 15\Omega || (7.5\Omega + 2.5\Omega)$$


[electrical_engineering_and_electronics:task_6tttque1e2nf2c7_with_calculation](#)
 dc network analysis, pure resistor network simplification, delta wye transformation, exam ee1
 ws2022

Exercise E5 Charging Capacitors**(written test, approx. 16 % of a 60-minute written test, WS2022)**

The capacitor becomes fully charged at the moment $t_0 = 0 \text{ s}$ when the switch S_1 is closed. The voltage across the capacitor is again 0 V at the moment $t_0 = 0 \text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

Hint! To solve this, first create an equivalent linear voltage source from U , R_1 , and R_B .

Solution: The equivalent linear voltage source is given by $U_{\text{eq}} = U \cdot \frac{R_B}{R_1 + R_B} = 12 \text{ V} \cdot \frac{12 \Omega}{20 \Omega + 12 \Omega} = 4.8 \text{ V}$. The internal resistance is given by $R_{\text{eq}} = R_1 \parallel R_B = 7.7 \Omega$. The voltage across the capacitor is $u_c(t_2) = U_{\text{eq}} \cdot (1 - e^{-t_2 / \tau}) = 4.8 \text{ V} \cdot (1 - e^{-1 \text{ ms} / 7.7 \text{ ms}}) = 1.2 \text{ V}$.

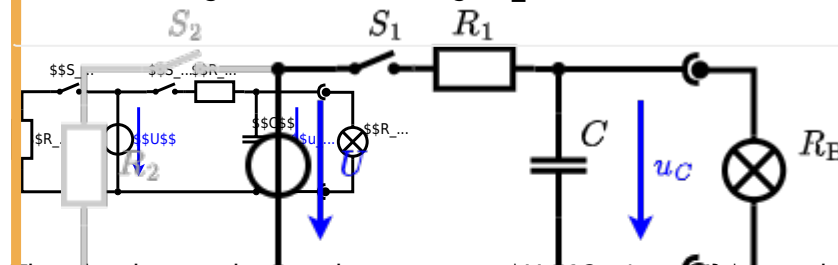


The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \Omega$ and a capacitor of $C = 100 \mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first tasks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

... First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

Solution

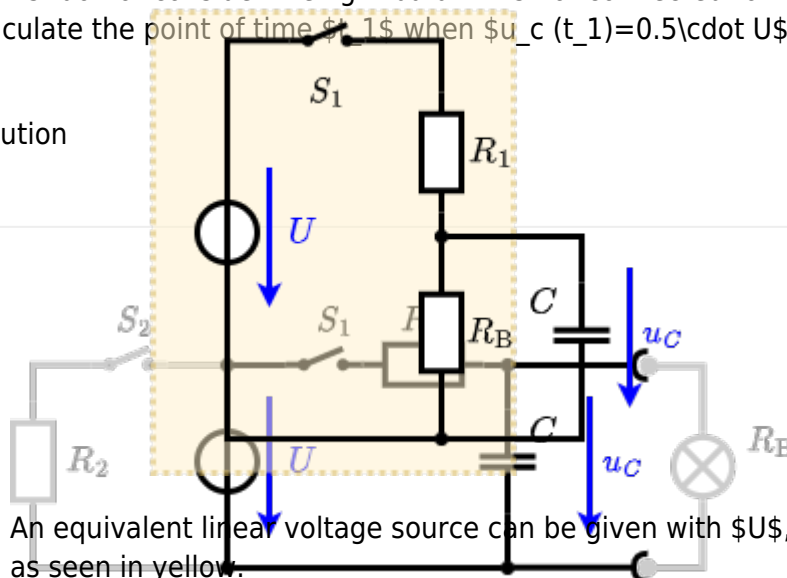

An equivalent linear voltage source can be given with U , R_1 , and R_B as seen in yellow.

The voltage across the capacitor is given by $u_c(t) = U_{\text{eq}} \cdot (1 - e^{-t / \tau})$. The internal resistance is given by $R_{\text{eq}} = R_1 \parallel R_B = 7.7 \Omega$. The time constant is $\tau = R_{\text{eq}} \cdot C = 7.7 \text{ ms}$. The voltage across the capacitor is $u_c(t_1) = 0.5 \cdot U = 6 \text{ V}$. It has to be rearranged to $(1 - e^{-t_1 / \tau}) = 0.5$. $e^{-t_1 / \tau} = 0.5$. $t_1 = \tau \cdot \ln(2) = 7.7 \text{ ms} \cdot \ln(2) = 5.3 \text{ ms}$.

$$\frac{\{1\}}{2} \cdot U \cdot (1 - e^{\frac{1}{10} \cdot \Omega \cdot 100 \cdot \mu F})) \end{align*}$$

electrical_engineering_and_electronics:task_tb6pi8dgh0m2e2pw_with_calculation
charging capacitors, dc network analysis, pure resistor network simplification, delta wye
transformation, exam ee1 ws2022

Exercise E6 Analyzing complex Impedances

(written test, approx. 14 % of a 60-minute written test, WS2022)

2. Given circuit diagram below, calculate the effective value $\underline{U}$ of the voltage $\underline{u}$ across the load resistor R_L and the effective value $\underline{I}$ of the current $\underline{i}$ through the load resistor R_L . (R and $\underline{X}_L$) shall be given.

After analysis, the following information should be extracted and documented in phase diagram (Z) and the effective value $\underline{U}$ and $\underline{I}$ shall be given.

.. Calculate the physical values of the two components.

$$\begin{aligned} \underline{U} &= \sqrt{0.24^2 + 4.68^2} = 4.72 \text{ V} \\ \underline{I} &= \sqrt{0.24^2 + 4.68^2} = 4.72 \text{ A} \end{aligned}$$

Solution

$$\begin{aligned} \underline{U} &= \sqrt{0.24^2 + 4.68^2} = 4.72 \text{ V} \\ \underline{I} &= \sqrt{0.24^2 + 4.68^2} = 4.72 \text{ A} \end{aligned}$$

The magnitude of the voltage $\underline{U}$ and the current $\underline{I}$ shall be given.

$$\begin{aligned} \underline{U} &= \sqrt{0.24^2 + 4.68^2} = 4.72 \text{ V} \\ \underline{I} &= \sqrt{0.24^2 + 4.68^2} = 4.72 \text{ A} \end{aligned}$$

The phase φ_i can be calculated as
$$\varphi_i = \arctan \left(\frac{\text{Im}(\underline{U})}{\text{Re}(\underline{U})} \right) = \arctan \left(\frac{-4.68}{0.24} \right)$$

electrical_engineering_and_electronics:task_jti0uzudcmg4u22t_with_calculation
complex impedance, exam ee1 ws2022

Exercise E7 Impedances at different Frequencies

(written test, approx. 18 % of a 60-minute written test, WS2022)

2. A series circuit has two impedances $Z_1 = 34 \sim \Omega$ and $Z_2 = 10 \sim \Omega$ in AC. The impedance of $Z_3 = 1.3 \sim \Omega$. At $f = 200$ with $Z_2 = 150 \sim \Omega$ which generates a current of $I_3 = 160 \sim \text{mA}$. Through Z_3 , I_3 shall have the same absolute value of the impedance as a capacitor $C_1 = 40 \sim \text{nF}$ at $f = 4 \sim \text{MHz}$.

Solution

$$\begin{aligned} \text{Solution} \quad R_1 &= 1.00 \sim \Omega \\ \text{Solution} \quad R_2 &= 10.0 \sim \Omega \end{aligned}$$

A series circuit means that the current is constant on every component.

The equivalent impedance for Z_1 and Z_2 combined is given by
$$\begin{aligned} \text{Parallel circuit means that the voltage is the same on } Z_1 \text{ and } Z_2 \\ \begin{aligned} \underline{U} &= \underline{U}_1 = \underline{U}_2 \\ \underline{U} &= \underline{U}_1 = \underline{U}_2 \\ \underline{U} &= \underline{U}_1 = \underline{U}_2 \end{aligned} \end{aligned}$$

Parallel circuit means that the voltage is the same on Z_1 and Z_2 .
$$\begin{aligned} \underline{U} &= \underline{U}_1 = \underline{U}_2 \\ \underline{U} &= \underline{U}_1 = \underline{U}_2 \\ \underline{U} &= \underline{U}_1 = \underline{U}_2 \end{aligned}$$

$$\underline{U} = \underline{U}_1 = \underline{U}_2$$
 (It has to, since $\underline{U}_1$ is perpendicular to $\underline{I}_1$ and $\underline{U}_2$ is perpendicular to $\underline{I}_2$.)

Therefore, the resulting current of the parallel circuit is given as:
$$\underline{I} = \underline{I}_1 + \underline{I}_2$$

This circuit has a bridge circuit.
$$\underline{I} = \underline{I}_1 + \underline{I}_2$$

Back to the first formula:
$$\underline{I} = \underline{I}_1 + \underline{I}_2$$

$$\underline{I} = \underline{I}_1 + \underline{I}_2$$

electrical_engineering_and_electronics:task_pdkgtyexxy1ktu3_with_calculation
complex impedance, exam ee1 ws2022

Exercise E8 Complex Impedance Circuit**(written test, approx. 15 % of a 60-minute written test, WS2022)**

2. Calculate the complex impedance Z of the circuit in the figure. $Z_1 = 10 \sim \Omega$ and $Z_2 = 10 \sim \Omega$. The voltage source $u(t) = 3.0 \sim \text{V} \cdot \sin(2\pi \cdot 15 \text{ kHz} \cdot t)$ is connected with an inductor $L = 10 \sim \mu\text{H}$ and a capacitor $C = 0.22 \sim \mu\text{F}$, all in series.

Solution

$$\text{Result} \quad Z = 19.8 \sim \Omega$$


Draw the circuit diagram of the given circuit.
$$\underline{Z} = \frac{\underline{U}}{\underline{I}}$$

Result
$$\underline{Z} = \frac{\underline{U}}{\underline{I}}$$

With
$$\underline{Z} = \frac{\underline{U}}{\underline{I}}$$

$$\begin{aligned} \underline{Z}_C &= \frac{1}{2\pi \cdot f \cdot C} \quad \&= \frac{1}{2\pi \cdot 15 \sim \{\rm kHz\} \cdot 330 \sim \{\rm \mu H\}} \\ \underline{Z} &= R + \underline{Z}_L + \underline{Z}_C \quad \&= R + j \cdot \underline{Z}_L - j \cdot \underline{Z}_C \\ &= R + j \cdot (\underline{Z}_L - \underline{Z}_C) \quad \&= \sqrt{R^2 + (\underline{Z}_L - \underline{Z}_C)^2} \end{aligned}$$

						\$10...
--	--	--	--	--	--	---------

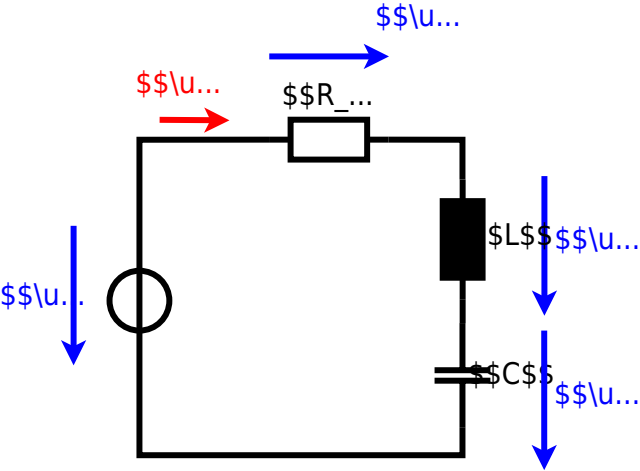

electrical_engineering_and_electronics:task_kricv9fh7haauo6q_with_calculation
complex impedance, exam ee1 ws2022

From:

<https://wiki.mexle.te.hs-heilbronn.de/> - **MEXLE Wiki**

Permanent link:

https://wiki.mexle.te.hs-heilbronn.de/electrical_engineering_and_electronics_1/ws2022_exam

Last update: **2026/01/12 00:24**

